

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Atsushi KASHITANI, et al.
Title: CAMERA SYSTEM AND DISPLAY APPARATUS
Appl. No.: Unassigned
Filing Date: November 1, 2000
Examiner: Unassigned
Art Unit: Unassigned

UTILITY PATENT APPLICATION
TRANSMITTAL

Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is the nonprovisional utility patent application of:

Atsushi KASHITANI
Toshiyasu NAKAO

Enclosed are:

- ☒ [X] Specification, Claim(s), and Abstract (76 pages).
- ☒ [X] Formal drawings (35 sheets, Figures 1-35).
- ☒ [X] Declaration and Power of Attorney (2 pages).
- ☒ [X] Claim for Convention Priority and 1 Document.
- ☒ [X] Assignment of the invention to NEC CORPORATION.
- ☒ [X] Assignment Recordation Cover Sheet.
- ☒ [X] Information Disclosure Statement.
- ☒ [X] Form PTO-1449 with copies of 1 listed Reference.

The filing fee is calculated below:

	Claims as Filed	Included in Basic Fee	Extra Claims	Rate	Fee Totals
Basic Fee				\$710.00	\$710.00
Total Claims:	16	- 20	= 0	x \$18.00	= \$0.00
Independents:	3	- 3	= 0	x \$80.00	= \$0.00
If any Multiple Dependent Claim(s) present:				+ \$270.00	= \$0.00
Assignment Recordation Fee				\$40.00	\$40.00
				SUBTOTAL:	= \$750.00
[] Small Entity Fees Apply (subtract ½ of above):					= \$0.00
				TOTAL FILING FEE:	= \$750.00


- [X] A check in the amount of **\$750.00** to cover the filing fee is enclosed.
- [] The required filing fees are not enclosed but will be submitted in response to the Notice to File Missing Parts of Application.
- [X] The Commissioner is hereby authorized to charge any additional fees which may be required regarding this application under 37 C.F.R. §§ 1.16-1.17, or credit any overpayment, to Deposit Account No. 19-0741. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Commissioner is authorized to charge the unpaid amount to Deposit Account No. 19-0741.

Please direct all correspondence to the undersigned attorney or agent at the address indicated below.

Respectfully submitted,

Date November 1, 2000

By


Reg No 41514

FOLEY & LARDNER
Washington Harbour
3000 K Street, N.W., Suite 500
Washington, D.C. 20007-5109
Telephone: (202) 672-5407
Facsimile: (202) 672-5399

David A. Blumenthal
Attorney for Applicant
Registration No. 26,257

CAMERA SYSTEM AND DISPLAY APPARATUS

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

5 The present invention relates to a camera system using a rotary mirror type display apparatus which displays an image via a rotary mirror arranged in front of a monitor, and a display apparatus.

DESCRIPTION OF THE RELATED ART

10 The present invention concerns a camera system and a display apparatus, in which a rotary camera type display apparatus displaying an image through a rotary mirror arranged in front of a monitor capable of displaying an image from a camera and a rotary mirror
15 type camera picking-up an image of an object via a rotary mirror arranged in front of the camera. In the following disclosure, as discussion for the prior art, to which the present invention is related, examples of two optical and electronic periscopes, one rotary mirror
20 type camera, and one periscope type display apparatus will be discussed.

[Optical Periscope]

 An optical periscope is a periscope operated optically without using an electronic equipment, such as
25 a camera and a monitor and has a construction as illustrated in Fig. 27. A user may see an object in a

finder through two mirrors fixed to a casing. Also, a direction to see is variable by rotating the casing. As illustrated in Fig. 27, electronic equipments which require wiring for power supply and signal transmission, are not contained in the casing and is constructed with optical parts. Therefore, the casing can be rotated over 360 ° endless manner and can vary the direction to view over 360° . Therefore, as mounted in submarine, condition on the water can be viewed from under the sea. In the alternative, it may be used to observe an opposite side sight over a high fence. Furthermore, since an absolute direction of the user looking into the periscope always matches with an absolute direction viewed across the periscope to permit observation over 360° in visceral manner.

[Electronic Periscope]

An electronic periscope is constructed with a combination of a camera rigidly secured on a universal head and a periscope type display Apparatus rotating the monitor per se which displays an image from the camera. The construction of the electronic periscope is illustrated in Fig. 28.

In the shown prior art, the electronic periscope is constructed with a combination of a rotary universal head type camera 400 and a periscope type display apparatus 300. The rotary universal head type camera 400 is constructed with a camera 401, a motor 203 driving

the camera 401 to rotate via a gear 402 on the basis of a control signal of a control circuit 208, an encoder 204 and an origin sensor for detecting an angular position and an origin position about vertical line with respect to a floor or a ground surface where the camera is placed, and the control circuit 208 for controlling revolution of the motor 203. The periscope type display apparatus is constructed with a gear 302 rigidly secured on a casing 110, a support 107 fixed to the gear 302, a monitor supported by the support 107 and displaying an image signal transmitted from the camera 401, a finder 108 provided on the casing for permitting the user to observe the monitor 301, a gear for transmitting rotation of the gear 302 to an encoder 104, the encoder 104 and an origin sensor 105 for detecting the angular position about the vertical line with respect to the floor or the ground surface, on which the user stands, a handle 109 to be gripped by the user upon rotating the casing.

Next, operation of the foregoing prior art will be discussed. When the user rotates the casing 110 with observing the monitor 301 as looking into the finder 108, the encoder 104 and the origin sensor 105 detects the angular position of the casing via the gear 302 to feed an angle signal A and an origin signal A indicative of detection of the origin, to the control circuit 208. The control circuit 208 drives the camera 401 to rotate on

the basis of the angle signal A and the origin signal A and an angle signal B indicative of angular position of the camera 401 and an origin signal B. Revolution of the motor 203 is transmitted to the camera 401 via the gear 402 to drive the camera 401 to rotate. As a method to establish correspondence between the angular position of the casing 110 and the angular position of the camera 401, for example, there is a method to match an orientation (north, south, east and west) of the user looking into the finder 108 and an orientation of the camera 401, namely to establish correspondence so that the absolute orientations become the same. The image data picked-up by the camera 401 is fed to the monitor 301 as an image signal and thus displayed.

As set forth above, the user may orient the camera 401 to the desired direction to monitor by rotating the casing 101. At the same time, the image from the camera can be seen on the monitor 301 across the finder 108. Namely, it becomes possible to monitor all direction over 360° from the site where the rotary universal head type camera 400 on the site where the periscope type display apparatus 300 is installed. Furthermore, similarly to the optical periscope, by matching the absolute angles of the orientation of the user and the orientation of the camera or by matching relative angular displacement, identification of orientation and change of direction can be done visceral

manner.

[Camera Control System as Combination of Rotary Mirror
Type Camera and Normal Monitor]

5 A construction of a camera control system, in
which a rotary mirror type camera and a normal monitor,
is illustrated in Fig. 29.

10 The conventional camera control system
illustrated in Fig. 29 is constructed with a rotary
mirror type camera 200, image conversion means 502 for
image conversion of an image from the camera 201, a
monitor 501 for displaying the image processed for
conversion by the image conversion means 502 and a
rotary mirror operating means 503 for feeding an
operation signal of operation of the user to the control
15 circuit 208. The camera 201 is constructed with the
camera 201, a mirror 202 arranged in front of the camera
201 at an angle about 45° with respect to a light axis,
a motor 203 driving the mirror 202 for rotation about
the light axis of the camera 201, the encoder 204 and
20 the origin sensor 205 detecting the angular position of
the mirror 202 about the light axis of the camera and
the origin position, and the control circuit 208 for
controlling revolution of the motor 203.

25 Operation of the prior art shown in Fig. 29 will
be discussed. When the user operates the rotary mirror
operating means 503, the operation signal indicative of
the content of control is fed to the control circuit 208.

As the rotary mirror operating means 503, lever, dial, cursor key and so forth are applicable, for example. When the cursor key 208 is applied, it may be required to rotate the mirror toward right and left by a right
5 arrow key and left arrow key. The control circuit 208 controls the motor 203 on the basis of the operation signal from the rotary mirror operating means 503, the angle signal B from the encoder, the origin signal B from the origin sensor 205 to realize rotation of mirror
10 depending upon operation by the user. The image thus input to the camera 201 via the mirror 202 driven to rotate, is fed to the image conversion means 502 as the image signal.

The process of image conversion in the image
15 conversion means 502 will be discussed with reference to Fig. 30. The camera 201 does not vary relative angle with respect to the floor or the ground surface, on which the rotary mirror type camera 200 is fixed, and only mirror 202 is relatively rotated. Therefore, the
20 image input to the camera 201 via the mirror 202 which is rotated, is rotated in vertical direction of the object (upper half of Fig. 30: arrow represents up and down direction of the object, and the arrow points upward direction). Namely, the vertical direction of the
25 object is rotated in the image associating with rotation of the mirror 202.

The image conversion means 502 converts the

rotation converts the image to place upward direction of the object to upward direction of the arrow as the converted image which is illustrated. However, in this manner, the user may see rotated rectangular image.

5 On the other hand, when the mirror 202 is placed at various angle, and if the converted images are overlaid in coaxial fashion, there are circle C2 constantly enclosing the overall screen, a circle C1 constantly presenting the image, a rectangle S1 touching internally with the circle C1 and a rectangle S2 touching externally to the circle C2 (lower half of Fig. 30). Accordingly, for example, by clipping a region corresponding to the circle C1 in the converted image and displaying on the monitor 501, the user may
10 constantly see the image of the same shape (circle in this case).

15 In the prior art as set forth above, the user may monitor the image of the desired direction on the monitor 501 by rotating the mirror 202 by operating the rotary mirror operating means 503.
20

[Japanese Unexamined Patent Publication No. Heisei 9-292827 "Rotary Type Image Viewing Apparatus"]

25 As the prior art relating to the periscope type display apparatus, there is a "rotary type image viewing apparatus" disclosed in Japanese Unexamined Patent Publication No. Heisei 9-292827.

Fig. 31 is an illustration showing a

construction of the conventional rotary type image viewing apparatus. For facilitating understanding correspondence with the embodiments of the present invention, respective components illustrated in Japanese Unexamined Patent Publication No. Heisei 9-292827 will be identified by names and reference numerals different from those used in the publication. However, the following discussion for the above-identified publication will never change significance of the disclosure.

In the shown prior art, the rotary type image viewing apparatus is constructed with the periscope type display apparatus 300, image storage means 601 for storing the overall image for displaying on the monitor 301 and image extracting means 602 for detecting angular position of the casing on the basis of the signals from the encoder 104 and the origin sensor 105 and extracting the image to be displayed from the overall image stored in the image storage means 601 depending upon the angular position for displaying on the monitor. The periscope type display apparatus is constructed with the gear 302 fixed to the casing 110, the monitor 301 supported by the support 107, the finder 108 provided in the casing 110 so that the user may view the monitor 301, the gear 302 for transmitting rotation of the gear 302 to the encoder 104, the encoder 104 and the origin sensor 105 for detecting the angular position about the

vertical line with respect to the floor or the ground surface where the user stands and the origin position, the handle 109 to be gripped by the user when the casing 110 is rotated.

5 Operation of the prior art will be discussed. When the user rotates the casing with gripping the handle 109 with looking into the monitor 301 through the finder 108, the encoder 104 and the origin sensor 105 detects the angular position of the casing 110 via the gear 302 to feed the angle signal A and the origin
10 signal A indicative of detection of the origin to the image extracting means 602. The image extracting means 602 extracts the image to be displayed on the monitor 301 in the overall image stored in the image storage means 601. The image extracted by the image extracting
15 means 602 is fed to the monitor 301 for displaying.

 Fig. 32 is an illustration showing a manner of extraction of the image to be displayed on the monitor 301 by the image extracting means 602 from the overall
20 image stored in the image storage means 601. When an image as viewed from inside of a Penguin breeding space in an aquarium virtually, Panoramic image as shown (upper half in Fig. 32) may be stored in the image storage means 601. Lateral direction of the Panoramic
25 image corresponds to the direction which the user desire to view, namely the angular position of the casing 110, by the shown prior art of the rotary type image viewing

apparatus. The direction to be viewed extends over all directions from 0° to 360° . If the user rotates the casing 110 over an angle α from a reference position, the image extracting means extracts the image of the portion corresponding to the angle α from the overall Panoramic image (lower half of Fig. 32) to feed to the monitor 310.

[Rotary Type Image Viewing Apparatus discussed as prior art in Japanese Unexamined Patent Publication No. Heisei 9-292827]

As the prior art relating to the rotary type image viewing apparatus, discussion will also be given for the rotary type image viewing apparatus (corresponding to Figs. 3 and 4 of Japanese Unexamined Patent Publication No. Heisei 9-292827) which has been disclosed as prior art in the above-identified publication. Again, names and reference numerals different from those used in the publication are used for facilitating understanding of correspondence with the embodiments of the present invention. However, the following discussion for the above-identified publication will never change significance of the disclosure.

The shown prior art is constructed with a periscope type display apparatus 700 and an image generating means 600A. The periscope type display apparatus 700 includes a ring gear 106 fixed to the

casing 110, the support 107, a monitor 701 supported by the support 107, the mirror 102 supported on the support 107 at an angle approximately 45° with respect to a straight line extending frontwardly through substantially center of the monitor 101 perpendicular to the display screen 101, a finder 108 for looking into the image on the monitor via the mirror 102, the encoder 104 and origin sensor 105 for detecting the angular position about the vertical line with respect to the floor or the ground surface where the user stands and the origin position, the handle 109 to be gripped by the user when the casing 110 is rotated. The image generating means includes an image storage means 601 storing overall image for displaying on the monitor 701, image extracting means 602 for detecting angular position of the casing on the basis of the signals from the encoder 104 and the origin sensor 105 and extracting the image to be displayed from the overall image stored in the image storage means 601 depending upon the angular position for displaying on the monitor and image conversion means 603A for performing conversion so that the image may be correctly displayed with respect to left and right and up and down on the periscope type display apparatus.

Operation of the shown prior art will be discussed.

The user rotates the casing 110 with gripping

the handle 109 with observing the image on the monitor 301 reflected by the mirror 102 as looking into the finder 108. Then, the encoder 104 and the origin sensor 105 detects angular position of the casing 110 via the gear 302 to feed the angle signal A and the origin signal A indicative of origin detection to the image extracting means 602. The image extracting means 602 extracts the image to be displayed on the monitor 301 from the overall image stored in the image storage means 601 on the basis of the angle signal A and the origin signal A to feed to the image conversion means 603A. The image conversion means 603A converts the image fed from the image extracting means 602 by inverting in up side down manner with taking a horizontal line extending through the center of the image as symmetry axis to feed to the monitor 701. The image displayed on the monitor 701 is provided to the user from the finder 108 via the mirror 102. In the image conversion means 603A, a reason for inverting the image in up side down manner is that the display image on the monitor 701 is inverted up side down as output to the finder 108 as reflected by the mirror 102, as shown in Fig. 34.

Fig. 35 is an illustration showing a manner of image conversion process, in which the image to be displayed on the monitor is extracted by the image extracting means 602 from the overall image stored in the image storage means 601 and is processed for image

conversion by the image conversion means 603A. Up to
image extraction, the process is the same as those
discussed with reference to Fig. 32 (upper and
intermediate portions of Fig. 35). In the shown prior
5 art, the extracted image is inverted in up-side-down
manner by the image converting means 6093A.

However, the foregoing four prior arts encounter
the following drawbacks.

[Problem of Optical Periscope]

10 Since the reflection light from the object is
optically lead to the finder, it is the most way to
extend an optical path directly above the site where the
user is located to see the object from the higher
position than the user. A typical example of this is the
15 periscope employed in the submarine. Accordingly, for
observing the object from the position distanced in
horizontal direction instead of the directly above the
user, complicate optical system is required and
significantly difficult or even impossible to realize in
20 certain case.

[Problem of Electronic Periscope]

By employing the electronic periscope, the image
of the distal site which has been difficult to monitor
by the optical periscope can be monitored. Namely, by
25 installing a rotary universal head type camera at the
distal site, the camera is driven to control the angular
position by the periscope type display apparatus for

monitoring the obtained image. However, in case of the rotatable universal head type camera, whole camera or the entire monitor in case of the periscope type display apparatus are rotated. The camera and monitor are relatively bulky and heavy. Accordingly, both of the rotatable universal head type camera and the periscope type display apparatus may have bulky and heavy rotary portions. This results in increasing of size of motor and requiring large current in the rotary universal head type camera on one hand and increasing size and weight of the casing to be operated by the user to rotate in the periscope type display apparatus on the other hand.

Furthermore, for the monitor and the camera, electrical connection is inherent. When the periscope type display apparatus is desired to be rotated in endless manner, connection between the rotating portion and the rotated portion has to be connected through a slip ring.

[Problem in Camera Control System Combined with Rotary Mirror type Camera and Normal Monitor]

The rotary mirror type camera has no electrical connection and can obtain wide vision image by rotating only relative light weight mirror to contribute for downsizing of the apparatus. However, since the camera is fixed and only mirror is rotated, the obtained image is rotated in vertical direction. Accordingly, upon displaying the image on the normal monitor, it is

required to display the obtained image after rotational conversion process.

[Problem of "Rotary Image Viewing Apparatus" as disclosed in Japanese Unexamined Patent Publication No. Heisei 9-292827]

Even in this prior art discussion with reference to Figs. 31 and 33, there is an electrical connection and has relatively heavy monitor which is rigidly secured on the periscope type casing operated by the user. Therefore, the user has to rotate the heavy casing. Furthermore, for rotating the casing in endless manner, slip ring has to be employed inherently.

SUMMARY OF THE INVENTION

The present invention has been worked out in view of the problems in the prior art set forth above. It is therefore an object of the present invention to provide a camera system and the display apparatus which can permit the camera to be installed at distal site which has been difficult in the optical periscope.

Another object of the present invention is to provide the camera system and the display apparatus which permits to make the rotary portion compact and light weight, and thus contributes down sizing the reduction of weight of the whole apparatus.

A further object of the present invention is to provide the camera system and the display apparatus which can eliminates necessary of providing an

electrical connection between the rotating portion and the rotated object.

A still further object of the present invention is to provide a camera system and a display apparatus which can view the image on a rotary mirror type display apparatus while the rotary mirror type camera so that the picked up image may be seen by the rotary mirror type display apparatus in spite of the fact that the picked up image may reverse head and tail depending upon angular position of the rotary mirror type camera to eliminate necessity of image conversion process.

According to the first aspect of the invention, a camera system, in which user operates a camera to watch an image obtained by the camera, comprises

a rotary mirror type camera assembly including a camera, a mirror for camera arranged in front of the camera with a given angle relative to a light axis of the camera, and a mirror rotating mechanism driving the mirror for the camera to rotate about the light axis of the camera,

a rotary mirror type display apparatus including a monitor displaying an image picked up by the camera, a mirror for monitor arranged in front of the monitor with a given angle with respect to a display direction of the monitor, a finder permitting viewing of the image displayed on the monitor via the mirror for monitor, and a casing rotatable together with the mirror for monitor

about an axis extending through substantially a center of the display screen of the monitor perpendicular to the display screen,

the mirror for camera being rotated according to rotation of the casing,

the mirror for monitor being fixed to the casing, when the casing is rotated, the mirror for monitor being rotated in display direction of the monitor in front of the monitor.

In the preferred construction, the rotary mirror type camera assembly and the rotary mirror type display apparatus are arranged so that an angle between an image pick-up direction along a light axis of the camera and the display direction of the monitor is within a range greater than or equal to 90° and smaller than or equal to 270° .

In another preferred construction, a circular window having an opening portion is arranged between the monitor and the mirror for monitor,

among an image displayed on the monitor, the image in a region corresponding to the opening portion is provided to a user as an image through the mirror for monitor and the finder.

In another preferred construction, the rotary mirror type camera assembly and the rotary mirror type display apparatus are arranged so that an angle between an image pick-up direction along a light axis of the

camera and the display direction of the monitor is within a range greater than or equal to 90° and smaller than or equal to 270° ,

a circular window having a circular opening portion between the monitor and the mirror for monitor, among an image displayed on the monitor, the image in a region corresponding to the opening portion is provided to a user as an image through the mirror for monitor and the finder.

10 In another preferred construction, a rectangular window having a rectangular opening is arranged between the monitor and the mirror for monitor,

the rectangular window is fixed to the casing, among an image displayed on the monitor, the image in a region corresponding to the opening portion is provided to a user as an image through the mirror for monitor and the finder.

15 In another preferred construction, the rotary mirror type camera assembly and the rotary mirror type display apparatus are arranged so that an angle between an image pick-up direction along a light axis of the camera and the display direction of the monitor is within a range greater than or equal to 90° and smaller than or equal to 270° ,

20 a rectangular window having a rectangular opening portion between the monitor and the mirror for monitor,

the rectangular window is fixed to the casing,
among an image displayed on the monitor, the
image in a region corresponding to the opening portion
is provided to a user as an image through the mirror for
5 monitor and the finder.

In another preferred construction, one of a
circular window and a rectangular window is arranged
between the monitor and the mirror for monitor,

10 the one of circular window and rectangular
window is fixed to the casing,

among an image displayed on the monitor, the
image in a region corresponding to the opening portion
is provided to a user as an image through the mirror for
monitor and the finder.

15 In another preferred construction, the rotary
mirror type camera assembly and the rotary mirror type
display apparatus are arranged so that an angle between
an image pick-up direction along a light axis of the
camera and the display direction of the monitor is
20 within a range greater than or equal to 90° and smaller
than or equal to 270° ,

one of a circular window and a rectangular
window is arranged between the monitor and the mirror
for monitor,

25 the circular window or rectangular window is
fixed to the casing,

among an image displayed on the monitor, the

image in a region corresponding to the opening portion is provided to a user as an image through the mirror for monitor and the finder.

In another preferred construction, the rotary mirror type camera assembly and the rotary mirror type display apparatus are arranged so that an angle between an image pick-up direction along a light axis of the camera and the display direction of the monitor is within a range smaller than or equal to 90° ,

the camera system further comprises image converting means for converting the camera so that the image of the object can be correctly displayed with respect left and right and up and down on the rotary mirror type display apparatus.

According to the second aspect of the invention, a camera system, in which user operates a camera to watch an image obtained by the camera, comprises

a rotary universal head camera including a camera and a universal head which can rotate the camera at least in horizontal direction,

a rotary mirror type display apparatus including a monitor displaying an image picked up by the camera, a mirror for monitor arranged in front of the monitor with a given angle with respect to a display direction of the monitor, a finder permitting viewing of the image displayed on the monitor via the mirror for monitor, and a casing rotatable together with the mirror for monitor

about an axis extending through substantially a center of the display screen of the monitor perpendicular to the display screen,

the universal head being rotated according to rotation of the casing,

image converting means for converting the camera so that the image of the object can be correctly displayed with respect left and right and up and down on the rotary mirror type display apparatus.

10 In the preferred construction, a circular window having an opening portion is arranged between the monitor and the mirror for monitor,

among an image displayed on the monitor, the image in a region corresponding to the opening portion is provided to a user as an image through the mirror for monitor and the finder.

15 In another preferred construction, one of a circular window and a rectangular window is arranged between the finder and the mirror for monitor,

20 the circular window or the rectangular window is fixed to the casing,

among an image displayed on the monitor, the image in a region corresponding to the opening portion is provided to a user as an image through the mirror for monitor and the finder.

25 According to another aspect of the invention, a display apparatus comprises

a rotary mirror type display apparatus including
a monitor displaying an image, a mirror for monitor
arranged in front of the monitor with a given angle with
respect to a display direction of the monitor, and a
finder permitting viewing of the image displayed on the
monitor via the mirror for monitor, and a casing
rotatable together with the mirror for monitor about an
axis extending through substantially a center of the
display screen of the monitor perpendicular to the
display screen, and

image generating means including image storage
means for storing overall image to be displayed on the
monitor, image extracting means for extracting image to
be displayed on the monitor from the overall image
according to rotation of the casing, and image
converting means for converting the image extracted by
the image extracting means, for correct display of an
object on the rotary mirror type display apparatus
correctly with respect to left and right and up and down
directions,

the image generated by the image generating
means being displayed on the monitor and overall image
stored in the image storage means can be seen by
rotating the casing.

In the preferred construction, a circular window
having an opening portion is arranged between the
monitor and the mirror for monitor,

among an image displayed on the monitor, the image in a region corresponding to the opening portion is provided to a user as an image through the mirror for monitor and the finder.

5 In another preferred construction, a rectangular window having a rectangular opening is arranged between the monitor and the mirror for monitor,

the rectangular window is fixed to the casing,
among an image displayed on the monitor, the
10 image in a region corresponding to the opening portion is provided to a user as an image through the mirror for monitor and the finder.

In another preferred construction, one of a circular window and a rectangular window is arranged
15 between the finder and the mirror for monitor,

the circular window or the rectangular window is fixed to the casing,

among an image displayed on the monitor, the image in a region corresponding to the opening portion
20 is provided to a user as an image through the mirror for monitor and the finder.

Other objects, features and advantages of the present invention will become clear from the detailed description given herebelow.

25

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood more

fully from the detailed description given herebelow and from the accompanying drawings of the preferred embodiment of the invention, which, however, should not be taken to be limitative to the invention, but are for explanation and understanding only.

In the drawings:

Fig. 1 is an illustration showing an external view of the first embodiment of a camera system according to the present invention;

10 Fig. 2 is a constructional illustration of the first embodiment of the camera system according to the present invention;

15 Fig. 3 is an illustration showing a relationship between an image pick-up element built-in the first embodiment of the camera system and an object and an angular position of a mirror;

Fig. 4 is an illustration showing a manner of formation of image of contracting optical system and of outputting picked up image to a monitor;

20 Fig. 5 is an illustration showing a manner of formation of image in the first embodiment of a rotary mirror type camera;

25 Fig. 6 is an illustration showing the image picked-up by the first embodiment of the image pick-up element and the manner of outputting of the picked-up image to the monitor;

Fig. 7 is an illustration showing an image

output to the first embodiment of the monitor and a manner of displaying the image to a user through a circular window and a mirror;

5 Fig. 8 is an illustration showing a manner of information formation when the first embodiment of the monitor is rotated;

Fig. 9 is an illustration showing a behavior of input/display screen when the first embodiment of the mirror is rotated;

10 Fig. 10 is an illustration showing behavior of rotation of the display image associating with rotation of the first embodiment of the mirror;

15 Fig. 11 is an illustration showing a finder, a circular window, a screen of the monitor and an image to be seen by the user when a circular window having an opening portion corresponding to the circle of the first embodiment;

20 Fig. 12 is a constructional illustration of the second embodiment of the camera system according to the present invention;

Fig. 13 is an illustration showing the second embodiment of a rotary mirror type display apparatus according to the present invention;

25 Fig. 14 is an illustration showing a manner to display the image output to the second embodiment of the monitor to the user via a rectangular window and the mirror;

Fig. 15 is an illustration showing a finder, a rectangular window, a screen of the monitor and an image to be seen by the user when a rectangular window having an opening portion corresponding to the rectangle of the second embodiment;

Fig. 16 is a constructional illustration of the third embodiment of the camera system according to the present invention;

Fig. 17 is an illustration showing a manner of image formation in the third embodiment of the rotary mirror type camera according to the present invention;

Fig. 18 is an illustration showing a manner of image formation when the third embodiment of the mirror of the invention is rotated;

Fig. 19 is an illustration showing a manner of image conversion process in image conversion means when $\theta = \alpha$;

Fig. 20 is an illustration showing a condition where a connection cable enters within a view field when the first embodiment of the rotary mirror type camera is installed on a stand;

Fig. 21 is an illustration showing an external view of the first embodiment of the present invention in the case where the rotary mirror type camera is hanged from a ceiling;

Fig. 22 is a constructional illustration of the fourth embodiment of the camera system according to the

present invention;

Fig. 23 is an illustration showing a manner of Image formation upon rotation of the fourth embodiment of the camera according to the present invention;

5 Fig. 24 is an illustration showing a manner of image conversion process in the image conversion means when $\theta = \alpha$;

10 Fig. 25 is a constructional illustration of the fifth embodiment of the camera system according to the present invention;

Fig. 26 is an illustration showing manner of an image stored in image storage means, image extraction by image extraction means and image conversion by image conversion means;

15 Fig. 27 is an illustration showing a general construction of the conventional optical periscope;

Fig. 28 is an illustration showing a construction of the conventional electronic periscope;

20 Fig. 29 is an illustration showing a construction of a conventional camera control system, in which a rotary mirror type camera and a normal monitor are combined;

25 Fig. 30 is an illustration showing a manner of rotation of the image to be obtained by the rotary mirror type camera;

Fig. 31 is an illustration showing a construction of a "rotary type image viewing apparatus"

of Japanese Unexamined Patent Publication No. Heisei 9-292827;

Fig. 32 is an illustration of an image stored in the image storage means in the apparatus shown in Fig. 31 and a manner of image extraction by image extracting means;

Fig. 33 is an illustration showing a construction of the conventional rotary type image viewing apparatus using the mirror;

Fig. 34 is an illustration for explaining the reason why conversion of the image up side down manner by the image conversion means in the apparatus shown in Fig. 33; and

Fig. 35 is an illustration showing the image stored in image storage means, image extraction by the image extracting means and image conversion by the image conversion means, in the apparatus shown in Fig. 33.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The preferred embodiment of the present invention will be discussed hereinafter in detail with reference to the accompanying drawings. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be obvious, however, to those skilled in the art that the present invention may be practiced without these specific details. In other instance, well-

known structures are not shown in detail in order to unnecessary obscure the present invention.

(First Embodiment)

[External Appearance]

5 Fig. 1 is an illustration showing an external view of the first embodiment of a camera system according to the present invention.

Referring to Fig. 1, the first embodiment of a camera system according to the present invention is constructed with a rotary mirror type display apparatus 100 and a rotary mirror type camera 200.

10 A user grips a handle 106 with observing an image picked-up by the rotary mirror type camera 200 looking into a finder 108. The user rotates the rotary mirror type display apparatus 100 as shown by arrow B. Then user may observe or view the surrounding of the rotary mirror type camera 200.

15 If a cable between the rotary mirror type display apparatus 100 and the rotary mirror type camera 200 for transferring an image signal and an angle signal is made long or by using radio signal, a condition around the rotary mirror type camera 200 located at remote site can be observed or viewed by the rotary mirror type display apparatus 100. It should be noted that, in the drawings, there is shown a case where the object is a penguin. This permits establishment of system enabling visitors visiting aquarium to experience

20

25

as-if a fellow of penguin by operating the rotary mirror type display apparatus 100, by installing the rotary mirror type camera 200 in a penguin bleeding space of the aquarium, for example. By setting the height of the rotary mirror type camera 200 approximately equal to the height of the penguin, realistic feeling may be enhanced. [Construction]

Fig. 2 is an illustration showing a construction of the first embodiment of the camera system according to the present invention.

Referring to Fig. 2, the first embodiment of the camera system according to the present invention is constructed with the rotary mirror type display apparatus 100 and rotary mirror type camera 200. The rotary mirror type camera 200 is constructed with a camera 201, a ring gear 206 arranged coaxially arranging the center axis thereof with a light axis of the camera 201, a support 207 rigidly fixed to the ring gear 206, a mirror 202 supported by the support 207 an angle about 45° with respect to the light axis of the camera in front of the camera 201, a motor 203 rotatingly driving the mirror 202 via the ring gear 206 about the light axis of the camera 201, an encoder 204 and an origin sensor 205 for detecting an angular position of the ring gears 206 about the light axis and the origin position with respect to the camera 201 and a control circuit 208 for controlling revolution of the motor 203. The rotary

mirror type display apparatus 100 is constructed with a generally cylindrical periscope type casing 110, a monitor 101, a circular window 103 located with aligning a center axis of an opening portion with a straight line
5 extending through substantially the center of the monitor 101 and perpendicular to the display screen, a ring gear located with placing a center axis thereof coaxial with the straight line extending through substantially the center of the monitor 101 and rigidly
10 fixed to the casing 110, the support 107 fixed to the ring gear 106, a mirror 102 supported by the support 107 with an angle substantially 45° with respect to the straight line extending frontwardly through substantially center of the monitor 101 perpendicular to
15 the display screen and reflecting the display image of the monitor 101 in a direction of arrow C, an encoder and an origin sensor 105 detecting angular position and origin position of the ring gear 106, a finder 108 provided in the casing 110 for viewing the screen of the
20 monitor 101 via the mirror 102, and a handle 109 provided on the casing 110 so that the user may grip to rotate the casing 110.

[Operation]

Operation of the shown embodiment will be
25 discussed.

With looking into the screen of the monitor 101 reflected by the mirror 102 through the finder 108, the

user grips the handle 109 to operate in the direction of
arrow A to rotate the casing 110 in a direction of arrow
B. Since the ring gear 106 is fixed to the casing 110,
the ring gear 106 is rotated associating with rotation
5 of the casing 110 to drive the support 107 fixed to the
ring gear 106 and the mirror 102 supported by the
support 107 to rotate simultaneously. However, the
monitor 101 is separated from the casing 110, and thus
is held stationary. Namely, with respect to the floor or
10 ground surface, on which the user and rotary mirror type
display apparatus 100 are present, the monitor 101 is
stable, and the casing and the ring gear 106, the
support 107 and mirror 102 fixed to the casing are
rotated. OF course, the user rotates the casing with
15 moving to the position where the finder 108 can be
looked into.

When the casing 110 is rotated, the encoder 104
and the original sensor 105 feeds the angle signal A
indicative of the angular position of the casing 110
20 and the origin signal A indicative of detection of
origin to the control circuit 208. The control circuit
208 drives the mirror 202 to rotate in a direction of
arrow D depending upon the angle signal A and the origin
signal AA and the angle signal B indicative of the
25 angular position of the mirror and the origin signal B
indicative of detection of the origin. To the camera 201,
the object in the direction of arrow E is picked up via

the mirror 202. Then the image data thus picked up is fed to the monitor 101 as the video data.

As a method for establishing correspondence between the angular position of the casing 110 and the angular position of the mirror 202, there is a method to match an absolute azimuth(north, south, east and west) and the absolute azimuth. On the other hand, there is a method to constantly match the relative angular variation, namely, when the casing is turned 90° toward right, the mirror 202 also turns 90° toward right. In either case, for the user, the direction in observation and viewing can be recognized visioerally.

[Definition of Angular Position of Image Pick-up Element 209 and Mirror 202]

In the camera 201, an image pick-up element 209 is built-in for converting an external light inciding through a lens into an electrical signal. Fig. 3 is an illustration showing a construction of an angular position of the camera 201, an image pick-up element 209, a lens 210 and the mirror 202, and an angular position of the mirror 202. The drawing on right side, is an illustrated as viewed along an arrow A. The image pick-up element 209 is consisted of photosensitive element arranged two-dimensionally. An image data consisted of an electrical signal depending upon intensity of the incident light to each photosensitive element is output. Each image of the output image data corresponds to the

photosensitive element forming the image pick-up element 209.

Each photosensitive element and each pixel in the image corresponding thereto can be expressed by (X, Y) coordinate system. Here, in the direction of arrow A, namely as viewed from the back surface of the camera, left upper position is assumed as (0, 0), (1, 0), (2, 0), ... (X_{\max} , 0), and the photosensitive elements located in the lowermost row are assigned as (0, 1, (1, 1), ... (X_{\max} , 1), and the pixel located at the most right lower position is assigned as (X_{\max} , Y_{\max}). The reason why such coordinate system is employed is to facilitate understanding of correspondence for correctly displaying up and down and right and left of the image by displaying the light intensity received at the photosensitive element (0, 0) at the most left upper pixel (0, 0) of the monitor and displaying the light intensity received at the photosensitive element (X_{\max} , Y_{\max}) at the most right lower pixel (X_{\max} , Y_{\max}) of the monitor.

Concerning angular position of the mirror 202, in the (X, Y) coordinate system expressing each photosensitive element of the image pick-up element 209 as shown in Fig. 3, a condition oriented perpendicular to X direction and to positive direction is assumed as $\theta = 0^\circ$, and clockwise direction as viewed along the arrow A is assumed as positive direction of θ .

[Relationship between Picked-up Image and Display Image
on Monitor]

Next, a manner of formation of image of the
object on the image pick-up element will be discussed.

5 Before giving discussion with respect to image formation
of the rotary mirror type camera 200 shown in Fig. 3,
manner of image formation in the typical contracting
optical system, and manner of displaying the image
picked-up by the image pick-up element will be discussed
10 with reference to Fig. 4. Referring to Fig. 4, a
reflection light from the object (penguin facing toward
left as viewed from the lens side) passes through the
lens as the contracting type optical system to form the
image on the photosensitive surface of the image pick-up
15 element with reversed the head and tail. The image pick-
up elements are arranged to place $(0, 0)$ at left lower
position and (X_{\max}, Y_{\max}) at right upper position with
respect to the photosensitive surface of the image pick-
up element. The image corresponding to the
20 photosensitive element $(0, 0)$ is displayed on left upper
position on the monitor, and images corresponding to the
photosensitive elements $(1, 0, (2, 0) \dots$ are displayed
in horizontally right direction in sequential order, and
then the pixel corresponding to the photosensitive
25 element (X_{\max}, Y_{\max}) is displayed at the right lower
position on the monitor. Then, the monitor screen shows
the image of the penguin facing toward left as seen from

the lens side.

Next, manner of formation of image via the mirror and lens with the reflection light from the object similarly to the rotary mirror type camera 200 will be discussed with reference to Fig. 5. Referring to Fig. 5, the reflected light from the object (here, penguin facing toward left as viewed from mirror 202 side) is reflected by the mirror 202 and is formed as image by the image pick-up element by the lens 210. The image pick-up element corresponding to the pixel (0, 0) is located at left lower position with respect to the photosensitive surface of the image pick-up element and the image pick-up element corresponding to the pixel (X_{\max} , Y_{\max}) is located at the right upper position. For facilitating understanding of the manner of image formation, Fig. 5 shows the object as viewed on the mirror 202 and a plane F as virtual plane between the mirror 202 and the lens 210.

Fig. 6 is an illustration showing a manner of displaying of the image picked up by the image pick-up element 209 on the monitor. The image formed on the photosensitive surface of the image pick-up element 209 is converted into the electric signal by the image pick-up element 209 to obtain the image data. At this time, arbitrary photosensitive element (x, y) becomes pixel (x, y) on the image data. The image data is arranged so that the image data of the pixel (0, 0) is located at left

upper position and the image data of the pixel (X_{\max} , Y_{\max}) is located at the right lower position. By displaying this image data on the monitor, the shown image can be obtained.

5 [Monitor Image Viewed Through Finder 108]

Fig. 7 is an illustration showing a condition where the user is viewing the image displayed on the monitor 101 via the finder 108 and the mirror 102. The image displayed on the monitor 101 is reflected by the mirror 102 through the circular opening portion of the circular window 103 and then output from the finder 108. The internal diameter of the ring gear 106 is selected to be sufficiently large so as not to shield the image. The image as viewed by the user across the finder 108 becomes a circular region corresponding to the opening portion of the circular window 108. The image on the monitor 101 will never be reversed up side down optically since it does not be viewed through the contracting optical system different from the rotary mirror type camera 200.

10

15

20

[Image Formation on Image Pick-up Element 209 when Mirror 202 is Rotated]

Fig. 8 is an illustration showing a manner of image formation on the image pick-up element 209 of the rotary mirror type camera 200 when the mirror 202 is rotated. As discussed with reference to Figs. 3 to 6, the reflected light from the object (here, penguin

25

facing toward left as viewed from the mirror 202 side)
presenting in image pick-up direction in the condition
where the mirror 202 is in a condition of $\theta = 0^\circ$ (left
upper position in Fig. 8).

5 Formation of image on the image pick-up element
209 is reversed in up side down manner as viewed from
the photosensitive surface side (left lower position in
Fig. 8). Next, the reflected light from the object (here,
penguin facing toward left as viewed from the mirror 202
10 side) is irradiated on the image pick-up element 209 as
reflected by the mirror 202 and by the lens 210 (right
upper position of Fig. 8). Image formation on the image
pick-up element 209 is one rotated over angle α in
counterclockwise direction as compared with the case up
15 and down direction of the object (in the direction of
arrow in the drawing) when $\theta = 0^\circ$ (right lower position
of Fig. 8).

[Input Image When Mirror 202 is Rotated]

Fig. 9 is an illustration showing an input image
20 transmitted from the camera 201 to the monitor 101 and
the image the user may see across the finder 108, when
the mirror 102 and the mirror 202 are rotated. Image
formed on the image pick-up element 209 when the mirror
202 is $\theta = 0^\circ$ and $\theta = \alpha$ (lower half of Fig. 8), is
25 converted into the electrical signal by the image pick-
up element 209 and is fed to the monitor 101 as the
input image data (upper half of Fig. 9). At this time,

the signal obtained by the arbitrary photosensitive element (x, y) becomes a luminance of the pixel (x, y) .

The input image under the condition where the mirror is positioned in the condition of $\theta = 0^\circ$, the image of the object is reversed in up side down manner over 180° and may not be rotated in left and right direction (left upper position of Fig. 9). This is based on correspondence between the photosensitive element of the image pick-up element 209 and the pixel of the input image. Next, the image picked-up in the condition where the mirror is rotated over $\theta = \alpha$, is rotated for an angle α from the position where the object is $\theta = 0^\circ$ in clockwise direction (right upper position in Fig. 9: It should be noted while the penguin as object is illustrated at the center of the screen in the drawing, it is illustrated a condition where the penguin does not face the direction of $\theta = 0^\circ$ but is facing in the direction of arrow α).

[Definition of Angular Position ϕ of Mirror 102]

A relative angle ϕ of the mirror 102 relative to the monitor is assumed that $\phi = 0^\circ$ when the straight line directed to the finder 108 from the mirror 102 matches with the longitudinal direction of the monitor 101, and clockwise direction as facing with the screen of the monitor is assumed that ϕ is positive direction.

[Output Image When Mirrors 102 and 202 being Rotated]

In the case where the input image when the

angular position θ of the mirror 202 is 0° , is displayed on the monitor 101, assuming that the relative angle ϕ of the monitor 101 and the mirror 102 is 0° , the image viewed through the finder 108 becomes an erect
5 image of the object as viewed from the position where the rotary mirror type camera 200 is installed (left lower position of Fig. 9)

Namely, the control circuit 208 is constructed to cause rotation of the mirror 202 for the angle α in response to user's operation of the mirror 102 for the
10 arbitrary angle α with setting the initial values of the angular position ϕ of the mirror 102 and the angular position θ of the mirror 202 are both 0° . The erect image as viewed from the position where the rotary
15 mirror type camera 200 is installed can be constantly provided to the user through the finder 108.

On the other hand, in order to match the angular position of the mirror 102, namely the angular position of the casing 110, with the angular position of the
20 mirror 202, it becomes necessary to reverse the display direction of the monitor (vertically upward in case of Fig. 2) and the image pick-up direction of the camera 201 (vertically downward in Fig. 2) for 80° . As set forth above with reference to Fig. 4, this is
25 necessitated for the image with the incident light beam is formed on with the light the image pick-up element in reversed form in up side down fashion by the lens of the

camera If an optical system, in which the light beam from the object is not reversed in up side down, the foregoing becomes unnecessary. It should be noted that the case where the optical system, in which the light beam from the object is not reversed and the display direction of the monitor 101 and the image pick-up direction of the camera are matched will be discussed later in terms of the third embodiment.

It should be noted that, in the shown embodiment, display direction of the monitor 101 in the rotary mirror type display apparatus 100 is vertically upward and the image pick-up direction of the camera 201 in the rotary mirror type camera 200 is vertically downward. However, no problem would be arisen even in directing in opposite directions, namely the display direction of the monitor 101 is vertically downward and the image pick-up direction of the camera is vertically upward.

Furthermore, when the rotary mirror type camera 200 can be installed at high elevation position, such as rooftop or top of the mountain, the camera 201 may be installed with image pick-up direction less than or equal to 90° relative to vertically upward for observing downward sight. The display direction and the image pick-up direction may be appropriately selected depending upon sites where the rotary mirror type display apparatus 100 and the rotary mirror type camera 200 are installed. While not limitative, it is preferred

that the rotary mirror type display apparatus 100 and the rotary mirror type camera 200 are installed so that an angular difference of the image pick-up direction of the camera 201 and the display direction of the monitor 101 is within a range of more than or equal to 90° and less than or equal to 270° .

[Function of Circular Window 103]

Fig. 10 is an illustration showing a manner of rotation of the display image of the monitor 101 associating with rotation of the mirror 202 and an image to be seen cross the finder 108 by rotation of the mirror 102. In Fig. 10, the arrow represents head and tail direction of the object and the arrow is directed vertically upward. When the mirror 202 is rotated, the image to be displayed on the monitor 101 is rotated as shown (upper portion in Fig. 10). If the mirror 102 is rotated at the corresponding magnitude as rotation of the mirror 202, the user may see the erected image through the finder 108 as the head and tail direction of the object matches with the up and down direction of the image (intermediate portion of Fig. 10). It should be noted that if the mirror 102 is sufficiently large, the user may see rotated rectangular image.

When entire image of the monitor 101 seen across the finder when the mirrors 102 and 202 are placed at various angular positions, are overlain in coaxial fashion, there are a circle C2 constantly enclosing the

entire screen, a circle C1 in which image is constantly present, a rectangle S1 internally contacting with the circle C1 and a rectangle S2 externally contacting with the circle C2 (lower portion of Fig. 10). Accordingly, for example, when the image of the region corresponding to the circle C1 is to be provided to the user among the screen of the monitor 101, the opening portion of the circular window 103 may be corresponded to the circle C1.

Thus, instead of rotary rectangular image giving uncomfortable feeling, circular image can be seen constantly irrespective of rotational angle of the mirrors 102 and 202. When image region corresponding to the circle C1 is to be provided to the user, a part of the picked-up image data is not displayed to make information amount to be image data smaller, namely field angle becomes narrower.

Fig. 11 is an illustration showing a display image of the finder 108, the circular window 103 and the monitor 101 when the circular window 103 having the opening portion corresponding to the circle C1. Fig. 11 shows the case where the mirrors 102 and 202 are rotated over the angle α , the circular image corresponding to the opening portion of the circular window 103 can be seen in erected fashion through the finder 108.

It should be noted that the region corresponding to the rectangles S1 and S2 are to be provided to the user will be discussed in the second embodiment.

As set forth above, the user may direct the mirror 202 to the direction desired to monitor by rotating the casing 110, and at the same time, the image from the camera can be seen across the finder 108.

5 Namely, at the site where the rotary mirror type display apparatus 100 is installed, entire direction of 360° around the site where the rotary mirror type camera 200 is installed, can be seen. Furthermore, similarly to the case of the optical periscope or the electronic
10 periscope discussed in the prior art, visceral azimuth identification and change of direction becomes possible by matching the direction of the user and the absolute azimuth of image pick-up direction of the rotary mirror type camera 200 or maintaining relative angular
15 variation matched.

(Second Embodiment)

[Construction]

Fig. 12 is an illustration showing a construction of the second embodiment of the camera
20 system according to the present invention.

Comparing the shown embodiment and the first embodiment with making reference to Figs. 12 and 2, there are two differences. First difference is that a rectangular window 103S is employed in the second
25 embodiment in place of the circular window 103 employed in the first embodiment. Another difference is that while the circular window 103 is filed on the side of

the monitor 101 (namely, the circular window 103 is separated from the casing 110) in the first embodiment, the rectangular window 103S is integral with the ring gear 106, namely fixed on the side of the casing 110 (since the ring gear 106 is fixed to the casing 110 similarly to the first embodiment). Other constructions are identical to the foregoing first embodiment.

Fig. 13 is an illustration showing the second embodiment of the rotary mirror type display apparatus 100S according to the present invention as viewed from the above. The illustration on upper side in Fig. 13 is the case where the relative angle $\phi = 0^\circ$ of the mirror 102 relative to the monitor 101, and illustration of the lower side is the case where $\phi = \alpha$. The rectangular window 103S is fixed so that respective edges of the rectangular opening portion becomes parallel to respective edges of rectangle as projection on the horizontal plane of the mirror (shown mirror 102 is quadrangular shape). When the user grips the handle 109 and rotates the casing 110 the mirror 102 and the rectangular window 103S are rotated associating therewith. As set forth above, the image on the monitor 101 to be provided to the user via the rectangular window 103S and the mirror 102 becomes constantly erected rectangular image as shown in Fig. 14 irrespective of the angle ϕ .

It should be noted that the circular window 103

in the first embodiment is fixed on the side of the monitor 101, namely separated from the casing 110. However, when the circular window is used, the window may be fixed either the monitor 101 or the casing 110 since the opening portion is circular. In such case, even when the circular window is rotated together with the casing 110, the opening portion which the user may see is circle. While the circular window will not be so heavy in viewpoint of construction, the circular window is fixed on the side of the monitor 101 in the first embodiment for reducing weight of the rotating portion (casing 110, the mirror 102 and so forth) as much as possible.

[Opening Portion of Rectangular Window 103S]

The rectangular opening of the rectangular window 103S may be of sizes corresponding to the rectangles S1 and S2 as shown in Fig. 10, for example. Merit and demerit in forming the window in rectangle S1 or S2 is the same as those in forming the window in circle C1 or C2 as set forth in the first embodiment. Fig. 15 is an illustration showing a screen of the finder 108, the rectangular window 103S and the monitor 101 and the image to be seen by the user. Fig. 15 shows the image to be seen from the finder when the casing is rotated over an angle α .

[Arrangement of Circular Window or Rectangular Window between Finder 108 and Mirror 102]

In the first and second embodiments, the circular window 103 or the rectangular window 103S is arranged between the monitor 101 and the mirror 102. However, no problem will be arisen even when the circular window 103 or the rectangular window 103S is arranged between the finder 108 and the mirror 102. However, naturally, in this case, the circular window 103 or the rectangular window 103S has to be fixed on the side of casing 110.

(Third Embodiment)

[Construction, Operation]

Fig. 16 is an illustration showing a construction of the third embodiment of the camera system according to the present invention.

Referring to Fig. 16, the shown embodiment of the camera system is constructed with the rotary mirror type display apparatus 100A, in which image conversion means 111A is added to the rotary mirror type display apparatus 100 in the first embodiment, and the rotary mirror type camera 200. Comparing the shown embodiment and the first embodiment with reference to Figs. 16 and 2, there are two differences. The first difference is that orientation of the camera 201 in the rotary mirror type camera 200 in the first embodiment is vertically downward, and in the shown embodiment, the orientation of the camera 201 is vertically upward. Another difference is that the image conversion means 111A is

added to the rotary mirror type display apparatus 100.

In the shown embodiment and the first embodiment, the construction other than foregoing two different points, are the same in basic construction. Therefore, detailed discussion for those common construction will be omitted in order to avoid redundant disclosure and whereby to keep the disclosure simple enough to facilitate clear understanding of the present invention. The following discussion will be given for necessity of the image converting means 111A due to arrangement of the rotary mirror type camera 200 with orienting the image pick-up direction vertically upward.

[Formation of Image to Image Pick-up Element 209]

Fig. 17 is an illustration showing a manner of formation of image in the shown embodiment of the rotary mirror type camera 200. Referring to Fig. 17, a reflection light from the object (penguin facing toward left as viewed from the side of mirror 202) is reflected by the mirror 202 and forms an image on the image pick-up element 209 by the lens 210. The image pick-up element is arranged to place the pixel (0, 0) at right upper position and the pixel (X_{\max} , Y_{\max}) at left lower position as directed to the photosensitive surface of the image pick-up element as shown. This arrangement is the same as the image pick-up element 209 in the first embodiment. For facilitating image formation, view of the object on the mirror is shown.

[Formation of Image on Image Pick-up Element 209 When Mirror is Rotated]

Fig. 18 is an illustration showing a manner of image formation on the rotary mirror type camera 200 and the image pick-up element 209 when the mirror 202 is rotated, in the shown embodiment.

Each photosensitive element of the image pick-up element 209 represents (X, Y) coordinates similar to the first embodiment, the coordinate system is established with setting the right upper position as (0, 0), for horizontally aligned pixels (1, 0), (2, 0) ... (X_{\max} , 0) toward left in sequential order, and the lowermost and left pixel (X_{\max} , Y_{\max}). On the other hand, the angular position θ relative to the mirror 202 of the camera 201 is positive as rotated in clockwise direction as viewed in the direction toward the photosensitive surface of the image pick-up element 209 with setting the condition oriented perpendicular to X-coordinate and toward positive direction of Y-coordinate as $\theta = 0^\circ$ in the (X, Y) coordinate system representative of respective photosensitive element of the image pick-up element 209.

The reflected light from the object (penguin facing toward left as viewed from the side of the mirror 202) presenting in the image pick-up direction in the condition where angular position of the mirror 202 is $\theta = 0^\circ$, forms an image on the image pick-up element 209 by the lens 210 as reflected by the mirror 202 (left upper

portion in Fig. 18). Formation of image on the image pick-up element 209 is not reversed up side down over 180° as viewed from the side of the photosensitive surface. Namely, the image of the object as viewed from the position of the mirror 202 is formed (left lower portion in Fig. 18). next, the reflection light from the object (penguin facing toward left as viewed from the side of the mirror 202) presenting in the image pick-up direction in the condition where the mirror 202 is placed $\theta = \alpha$, forms image on the image pick-up element 209 by the lens 210 as reflected by the mirror 202.

Formation of image on the image pick-up element 209 is rotated over the angle α in clockwise direction when $\theta = 0^\circ$ in up and down direction of the object (direction of arrow in the drawing (right lower portion in Fig. 18)).

[Image Conversion Process in Image Conversion Means 111A]

The image formed on the photosensitive surface of the image pick-up element 209 is converted into an electrical signal to be the image data. The image converting means 111A feeds an original image data to the monitor 101 through conversion process. Hereinafter, with taking the condition where the mirror 202 is placed at $\theta = \alpha$ as example, conversion system will be discussed with reference to Fig. 19.

The image formed on the photosensitive surface

of the image pick-up element 209 is converted into the electric signal by the image pick-up element 209 to generate an original image data (left upper portion → right upper portion in Fig. 19). The image conversion
5 means 111A is rotated over $\theta = \alpha$ in clockwise direction about the center of the image of the original image data (right upper portion → right center portion in Fig. 19). Next, after left and right conversion for reversal about vertical axis extending through the center of the image
10 (right center portion → left center portion in Fig. 19), the image is rotated about the center of the image over $\theta = \alpha$ in counterclockwise direction (left center portion → left lower portion in Fig. 19). Finally, converting for reversal in up side down direction about
15 horizontal axis extending through the center of the image (left lower portion → right lower portion in Fig. 19), to feed a resultant image to the monitor 101.

Vertical or left and right reversal or rotation conversion process is quite basic image conversion
20 process. By multiplying the coordinates (x, y) indicative of each pixel by conversion matrix, coordinates after conversion can be calculated. Since these processes are not essential to the present invention, detailed discussion will be omitted.

25 How the image displayed on the monitor 101 be seen by the user across the finder 108 is similar to that seen across the finder 108 in the first embodiment.

Discussion has been given with respect to the image viewed on the monitor for Figs. 7 and 9 and thus further discussion will be omitted.

[Merit of Third Embodiment]

5 As set forth above, the rotary mirror type display apparatus 100 is constructed with the rotary mirror type display apparatus 100A adding the image conversion means 111A. The rotary mirror type display apparatus 100A and the rotary mirror type camera 200 may
10 be arranged with matching the display direction of the monitor and the image pick-up direction of the camera 201, particularly in vertically upward.

 Applying the present invention is practical operation, the rotary mirror type camera 200 is often
15 fixed on the tip end of a stand placed on the floor as shown in Fig. 1. However, when the rotary mirror type camera 200 is fixed on the stand with directing the image pick-up direction of the camera 201 as in the first embodiment, the connection cables of the camera
20 201, the motor, 203, the encoder 204, the origin sensor 205 and so forth may block a part of view field as shown in Fig. 20. However, as set forth above in connection with the third embodiment, when the camera 201 can be installed with orienting the image pick-up direction
25 vertically upward, such problem can be avoided.

 It should be noted that the rotary mirror type camera 200 is not necessarily mounted on the stand. For

example, it is often hang the camera from the ceiling or fixed on the ceiling. In such case, by wiring the connection cable on the side of the ceiling, the connection cable will never enter into the view field even through the image pick-up direction of the camera is directed vertically downward as in the first embodiment. Namely, depending upon the condition of the sites where the rotary mirror type display apparatus 100 and rotary mirror type camera 200 are installed, the first and third embodiments are selectively used to determine orientation of the monitor 101 and the camera 201, respectively.

It should be noted that, in the shown embodiment, discussion has been given for the example where the display direction of the monitor 101 in the rotary mirror type display apparatus 100 and the image pick-up direction of the camera 201 in the rotary mirror type camera 200 are both directed in vertically upward. However, it may not cause problem even when the display direction of the monitor 101 and the image pick-up direction of the camera are set in vertically downward.

Furthermore, when the rotary mirror type camera 200 is installed at high elevation position, such as rooftop of the building or top of the mountain, the image pick-up direction of the camera may be installed with tilting in an angle less than or equal to 90° with respect to vertical direction to enable observation of

downward sight. While not limitative, it is preferred that the rotary mirror type display apparatus 100 and the rotary mirror type camera 200 are installed so that an angular difference of the image pick-up direction of the camera 201 and the display direction of the monitor 101 is within a range of more than or equal to 90° .

(Fourth Embodiment)

[Construction]

Fig. 22 is an illustration showing a construction of the fourth embodiment of the camera system according to the present invention.

Referring to Fig. 22, the shown embodiment of the camera system is constructed with a rotary mirror type display apparatus 100B and a rotary universal head type camera 400. The rotary mirror type display apparatus 100B is constructed by adding image conversion means 111B to the rotary mirror type display apparatus 100 in the first embodiment, and other constructions are the same as the former embodiments. On the other hand, the rotary universal head type camera is also the same as the rotary universal head type camera 400 in the electric periscope as discussed in the second embodiment.

[Operation]

When the user rotates the casing 110 of the rotary mirror type display apparatus 100B, the angular position information of the casing 110 is fed to the control circuit 208 from the encoder 104 and the origin

sensor 105. The control circuit controls the motor 203 on the basis of the angular position information of the rotary mirror type display apparatus 100B and the angle information from the encoder 204 and the origin sensor 205 in the rotary universal head type camera 400.

Fig. 23 is an illustration of the rotary universal head type camera 400 and an original image output from the rotary universal head type camera, as a camera 401 is rotated. In the shown embodiment, normal camera (camera 401) picks-up the image of the object by rotating the camera horizontally. Accordingly, irrespective of angular position of the camera 401, up and down direction of the object and up and down direction of the image are matched with each other. Namely, as in the first and third embodiments, up and down direction of the object may not be differentiated from the up and down direction of the image, [Image Conversion Process in Image Conversion Means 111B]

The image conversion means 111B converts the original image fed from the camera 401 to feed to the monitor 101. The conversion process in the image conversion means 111B will be discussed in terms of the case where the angular position of the camera is $\theta = \alpha$, with reference to Fig. 24.

The original image fed from the camera 401 is at first converted for reversal of up side down with

respect to the horizontal axis extending through the center of the image. Next, the original image is rotated in clockwise direction for $\theta = \alpha$ about the center of the image for rotational conversion to feed to the monitor 101.

How the image displayed on the monitor 101 be seen by the user across the finder 108 is similar to that seen across the finder 108 in the first embodiment. Discussion has been given with respect to the image viewed on the monitor for Figs. 7 and 9 and thus further discussion will be omitted.

(Fifth Embodiment)

[Construction]

Fig. 25 is an illustration showing a construction of the fifth embodiment of the camera system according to the present invention.

Referring to Fig. 25, the shown embodiment of the camera system is constructed with the rotary mirror type display apparatus 100 and an image generating means 600. The rotary mirror type display apparatus 100 has the identical construction as the rotary mirror type display apparatus 100 in the first embodiment. Therefore, detailed discussion for those common construction will be omitted in order to avoid redundant disclosure and whereby to keep the disclosure simple enough to facilitate clear understanding of the present invention.

[Operation]

When the user rotates the casing 110, the angular position information of the casing 110 is fed to image extraction means 602 through the encoder 104 and the origin sensor 105. The image extracting means 602
5 extracts the image to be displayed on the monitor from the overall image stored in image storage means 601 to feed to image conversion means 603. The image conversion means 603 performs conversion process for the image fed from the image extracting means 602 to feed to the
10 monitor 101.

[Extraction and Conversion of Image in Image Generating Means 600]

Fig. 26 is an illustration showing a manner of extracting the image to be displayed on the monitor 101
15 from the overall image stored in image storage means 601 by the image extracting means 602 and image conversion process by the image conversion means 603. As the image to be stored in the image storage means 601, an example of the image of the penguin bleeding space as viewed
20 from inside in the aquarium the same as those illustrated and discussed in Figs. 32 and 35 as prior art. Lateral direction of panoramic image corresponds to the direction which the user desires to see, namely corresponds to the angular position of the casing 110
25 and extends over all directions of 0 to 360°. (Upper portion in Fig. 26).

Assuming that the user rotates the casing 110

from the reference position over an angle α , the image extracting means 602 extracts the image of the portion corresponding to the angle α from the entire panoramic image (intermediate portion in Fig. 26). The extracted
5 image is fed to the image converting means 603. Then, at first, the image is converted for reversal in up side down manner in symmetrical fashion with respect to the horizontal axis extending through the center of the image. Thereafter, the image is rotated in clockwise
10 direction over the angle α about the center of the image (lower portion of Fig. 26), and then fed to the monitor 101.

How the image displayed on the monitor 101 be seen by the user across the finder 108 is similar to
15 that seen across the finder 108 in the first embodiment. Discussion has been given with respect to the image viewed on the monitor for Figs. 7 and 9 and thus further discussion will be omitted.

As set forth above, five embodiments of the
20 present has been discussed. In the shown embodiments, only discussion has been given for variation of the direction to see in horizontal direction (pan) , however, in practical apparatus, it should be required to zoom-in and zoom-out and wide screen requiring variation of
25 field angle, or to change image pick-up direction in vertical direction (tilt). However, the present invention is aimed for providing the erected image to

the user by canceling image rotation to be caused upon variation of the horizontal direction of the image pick-up direction in the rotary mirror type camera by the rotary mirror type display apparatus and is not relevant to variation of field angle or variation of the image due to variation of the image pick-up direction in vertical direction. Therefore, in the foregoing discussion for the embodiments, discussion has been concentrated for application of the invention for only variation of the image pick-up direction in horizontal direction.

On the other hand, concerning the rotary mirror type display apparatus, discussion has been given as periscope type display apparatus of generally cylindrical shape, in which the image is seen by looking into the finder built-in the monitor, it is also possible to employ a liquid crystal projector in place of the monitor to display the image on the peripheral wall by rotating the mirror for forming the display apparatus.

It should be noted that zoom/wide and tilt operation may also be realized by providing appropriate interface in the casing to be operated by the user. Also, a biaxial mechanism permitting operation of the mirror of the rotary mirror type camera in both of horizontal and vertical directions, has been disclosed in commonly owned Japanese Patent Application No. Heisei 11-180941,

"Biaxial Drive Mechanism, Image Input Device using the same and Light Emitting Device". The disclosure of the above-identified commonly owned Japanese Patent Application will be herein incorporated by reference.

5 With the present invention, since the direction of the object, the absolute angle of the direction, in which the user see the object or the image showing the object , or relative angular variations are matched, visceral recognition of direction becomes possible to
10 facilitate understanding of the overall space where the object is present as original function of the periscope. In addition, the following effects can be achieved.

 Remote control of the camera becomes possible.

 The camera system according to the present
15 invention is designed for picking up the object by the electronic camera and display device to enable installation in remote site which has not been possible in the optical periscope. As set forth in the discussion for the first embodiment, by installing the rotary
20 mirror type camera in the penguin bleeding space in aquarium, the behavior of penguin as viewed from the inside of the bleeding space can be seen in the site outside can be seen. In contrast to this, if the optical periscope is installed in the penguin bleeding space, a
25 place where the user may enter has to be provided directly above or below the penguin bleeding space.

 The rotating portion can be constructed in

compact and in light weight.

Furthermore, instead of rotating the monitor and the camera together with both of the rotary mirror type display apparatus and the rotary mirror type camera, the monitor and the camera which are compact and light weight in comparison with the conventional camera are only rotated. Therefore, the rotating portion can be made compact and light weight and thus contribute for down-sizing and reducing of weight. Furthermore in the rotary mirror type camera, in comparison with the case to drive the entire camera, the motor having lower torque becomes applicable. Down-sizing and reduction of weight of the motor becomes possible. On the other hand, in the rotary mirror type display apparatus since the casing to be operated by the user can be made smaller and lighter to improve operability.

It is not necessary to provide electrical connection by the user. Not only reduction of size and weight in the mirror, but also the mirror has not electrical wiring. Accordingly, if it is desired to rotate the casing or mirror of the rotary mirror type camera in endless manner, slip ring or other device for establishing electrical connection between the rotating has to be provided if the whole of the monitor and the camera is rotated. In contrast to this, in accordance with the present invention, since only mirror is rotated, no electrical connection is required.

In the meanwhile, it will provide greater freedom for the user by permitting rotation of the casing or rotary type mirror in endless manner. Also, in comparison with the case where the slip ring is employed, friction of the rotating portion and rotated portion can be reduced for improving reliability of durability.

Image conversion process is unnecessary. By setting the display direction of the monitor in the rotary mirror type display apparatus and the image pick-up direction of the camera in the rotary mirror type camera are set to have angular difference greater than or equal to 90° , namely in reverse direction, the user may see the correctly erected image in up and down direction and left and right direction across the finder even if the image picked up by the camera is output to the monitor without conversion process. Namely, with the present invention, while the rotary mirror type camera causing rotation of the image depending upon the angular position of the mirror with reversing in up side down manner of the object on the picked-up image, necessity of image conversion is eliminated by viewing the image with the rotary mirror type display apparatus.

For performing originally required image conversion process and rotation control of the mirror simultaneously, it is required to employ personal computer or the like. However, in the present invention, it is only required the control circuit (circuit

corresponding to the control circuit 208 in the foregoing embodiments) for realizing rotation control for the mirror. Accordingly, high performance CPU as that required in the personal computer is not required
5 to lower cost of the overall apparatus.

What is seen through the finder is not rotating rectangular image but constantly circular image.

By arranging the circular window having circular opening portion between the monitor in the rotary mirror type display apparatus and the mirror for the monitor
10 for providing only image of the region corresponding to the opening portion of the circular window in the image displayed on the monitor through the mirror for the monitor and the finder, the image to be seen across the
finder is no uncomfortable rotating rectangular image
15 but is circular image irrespective of the rotational angle of the mirror for the monitor or mirror for the camera.

The image seen across the finder is not rotating rectangular image but constantly non-rotating
20 rectangular image.

By arranging the rectangular window instead of circular window between the monitor and the mirror for the monitor, and fixing the rectangular window on the casing instead of the monitor, the image to be seen
25 across the finder is not the uncomfortable rotating rectangular image but is constantly rectangular image

irrespective of the angular position of the mirror of the monitor or the mirror of the camera.

The image to be seen across the finder is not the rotating rectangular image but is constantly
5 circular non-rotating rectangular image.

On the other hand, by arranging the circular window or the rectangular window between the finder and the mirror for the monitor, and fixing the window on the casing, only image of the region corresponding to the
10 opening portion of the circular window or the rectangular window can be provided to the user through the mirror for the monitor and the finder.

By providing the image converting means, display direction of the monitor in the rotary mirror type
15 display apparatus and the image pick-up direction of the camera in the rotary mirror type camera may be set to be less than or equal to 90° .

The camera system may arrange the rotary mirror type camera and the rotary mirror type display apparatus
20 may be arranged so that the image pick-up direction along the light axis of the camera and the display direction of the monitor may be angled within an angular range of less than or equal to 90° by displaying the image picked up by the rotary mirror type camera on the
25 monitor in the rotary mirror type display apparatus with conversion. For example, the image pick-up direction along the light axis of the camera and the display

direction of the monitor may be set both in vertically upward direction (angle between both direction is 0°).

The camera system according to the present invention can be installed at arbitrary orientation. It is possible that orientations of the rotary mirror type display apparatus and rotary mirror type camera have to be changed for limitation of the installation side of the camera system of the present invention and limitation in leasing the cable connected to the rotary mirror type display apparatus and the rotary mirror type camera. However, the rotary mirror type display apparatus and the rotary mirror type camera may be arranged in arbitrary orientation.

By using the rotary universal head type camera, the image conversion process can be slightly amplified, and commercial universal head camera may be used.

The present invention is a camera system, in which the universal head type camera and the rotary mirror type display apparatus.

On the other hand, by employing the rotary universal head type camera, the following effect can be achieved. The image to be picked up by the rotary universal head type camera is different from the image picked up by the rotary mirror type camera, in that the image is constantly erected image in which the head and tail of the object and the picked up image match with each other. Therefore, conversion process for displaying

the image on the monitor in the rotary mirror type display apparatus can be simplified. Furthermore, the various rotary universal head type camera has been put into market. Therefore, by employing such rotary
5 universal head type camera, may be constructed easily and quickly.

Although the invention has been illustrated and described with respect to exemplary embodiment thereof, it should be understood by those skilled in the art that
10 the foregoing and various other changes, omissions and additions may be made therein and thereto, without departing from the spirit and scope of the present invention. Therefore, the present invention should not be understood as limited to the specific embodiment set
15 out above but to include all possible embodiments which can be embodied within a scope encompassed and equivalents thereof with respect to the feature set out in the appended claims.

WHAT IS CLAIMED IS:

1. A camera system, in which user operates a camera to watch an image obtained by said camera, comprising:

a rotary mirror type camera assembly including a camera, a mirror for camera arranged in front of said camera with a given angle relative to a light axis of said camera, and a mirror rotating mechanism driving said mirror for said camera to rotate about said light axis of said camera;

a rotary mirror type display apparatus including a monitor displaying an image picked up by said camera, a mirror for monitor arranged in front of said monitor with a given angle with respect to a display direction of said monitor, a finder permitting viewing of the image displayed on said monitor via said mirror for monitor, and a casing rotatable together with said mirror for monitor about an axis extending through substantially a center of the display screen of said monitor perpendicular to the display screen;

said mirror for camera being rotated according to rotation of said casing;

said mirror for monitor being fixed to said casing, when said casing is rotated, said mirror for monitor being rotated in display direction of said monitor in front of said monitor.

2. A camera system as set forth in claim 1, wherein
said rotary mirror type camera assembly and said rotary
mirror type display apparatus are arranged so that an
angle between an image pick-up direction along a light
axis of said camera and the display direction of said
5 monitor is within a range greater than or equal to 90°
and smaller than or equal to 270° .

3. A camera system as set forth in claim 1, wherein
a circular window having an opening portion is arranged
between said monitor and said mirror for monitor,
among an image displayed on said monitor, the
5 image in a region corresponding to said opening portion
is provided to a user as an image through said mirror
for monitor and said finder.

4. A camera system as set forth in claim 1, wherein
said rotary mirror type camera assembly and said rotary
mirror type display apparatus are arranged so that an
angle between an image pick-up direction along a light
axis of said camera and the display direction of said
5 monitor is within a range greater than or equal to 90°
and smaller than or equal to 270° ,

a circular window having a circular opening
portion between said monitor and said mirror for
10 monitor;

among an image displayed on said monitor, the

image in a region corresponding to said opening portion is provided to a user as an image through said mirror for monitor and said finder.

15

5. A camera system as set forth in claim 1, wherein a rectangular window having a rectangular opening is arranged between said monitor and said mirror for monitor,

5

said rectangular window is fixed to said casing, among an image displayed on said monitor, the image in a region corresponding to said opening portion is provided to a user as an image through said mirror for monitor and said finder.

10

6. A camera system as set forth in claim 1, wherein said rotary mirror type camera assembly and said rotary mirror type display apparatus are arranged so that an angle between an image pick-up direction along a light axis of said camera and the display direction of said monitor is within a range greater than or equal to 90° and smaller than or equal to 270° ,

5

a rectangular window having a rectangular opening portion between said monitor and said mirror for monitor;

10

said rectangular window is fixed to said casing, among an image displayed on said monitor, the image in a region corresponding to said opening portion

is provided to a user as an image through said mirror
15 for monitor and said finder.

7. A camera system as set forth in claim 1, wherein
one of a circular window and a rectangular window is
arranged between said monitor and said mirror for
monitor,

5 said one of circular window and rectangular
window is fixed to said casing,

among an image displayed on said monitor, the
image in a region corresponding to said opening portion
is provided to a user as an image through said mirror
10 for monitor and said finder.

8. A camera system as set forth in claim 1, wherein
said rotary mirror type camera assembly and said rotary
mirror type display apparatus are arranged so that an
angle between an image pick-up direction along a light
5 axis of said camera and the display direction of said
monitor is within a range greater than or equal to 90°
and smaller than or equal to 270° ,

one of a circular window and a rectangular window
is arranged between said monitor and said mirror for
10 monitor,

said circular window or rectangular window is
fixed to said casing,

among an image displayed on said monitor, the

image in a region corresponding to said opening portion
15 is provided to a user as an image through said mirror
for monitor and said finder.

9. A camera system as set forth in claim 1, wherein
said rotary mirror type camera assembly and said rotary
mirror type display apparatus are arranged so that an
angle between an image pick-up direction along a light
5 axis of said camera and the display direction of said
monitor is within a range smaller than or equal to 90° ,
said camera system further comprises image
converting means for converting said camera so that the
image of the object can be correctly displayed with
10 respect left and right and up and down on said rotary
mirror type display apparatus.

10. A camera system, in which user operates a camera
to watch an image obtained by said camera, comprising:
a rotary universal head camera including a camera
and a universal head which can rotate said camera at
5 least in horizontal direction,
a rotary mirror type display apparatus including
a monitor displaying an image picked up by said camera,
a mirror for monitor arranged in front of said monitor
with a given angle with respect to a display direction
10 of said monitor, a finder permitting viewing of the
image displayed on said monitor via said mirror for

monitor, and a casing rotatable together with said
mirror for monitor about an axis extending through
substantially a center of the display screen of said
15 monitor perpendicular to the display screen;

said universal head being rotated according to
rotation of said casing,

image converting means for converting said camera
so that the image of the object can be correctly
20 displayed with respect left and right and up and down on
said rotary mirror type display apparatus.

11. A camera system as set forth in claim 10, wherein
a circular window having an opening portion is arranged
between said monitor and said mirror for monitor,

among an image displayed on said monitor, the
5 image in a region corresponding to said opening portion
is provided to a user as an image through said mirror
for monitor and said finder.

12. A camera system as set forth in claim 10, wherein
one of a circular window and a rectangular window is
arranged between said finder and said mirror for monitor,

said circular window or said rectangular window
5 is fixed to said casing;

among an image displayed on said monitor, the
image in a region corresponding to said opening portion
is provided to a user as an image through said mirror

for monitor and said finder.

10

13. A display apparatus comprising:

a rotary mirror type display apparatus including
a monitor displaying an image, a mirror for monitor
arranged in front of said monitor with a given angle
with respect to a display direction of said monitor, and
5 a finder permitting viewing of the image displayed on
said monitor via said mirror for monitor, and a casing
rotatable together with said mirror for monitor about an
axis extending through substantially a center of the
display screen of said monitor perpendicular to the
10 display screen; and

10

15

image generating means including image storage
means for storing overall image to be displayed on said
monitor, image extracting means for extracting image to
be displayed on said monitor from said overall image
according to rotation of said casing, and image
converting means for converting the image extracted by
said image extracting means, for correct display of an
object on said rotary mirror type display apparatus
correctly with respect to left and right and up and down
20 directions,

20

the image generated by said image generating
means being displayed on said monitor and overall image
stored in said image storage means can be seen by
25 rotating said casing.

25

14. A display apparatus as set forth in claim 13,
wherein a circular window having an opening portion is
arranged between said monitor and said mirror for
monitor,

5 among an image displayed on said monitor, the
image in a region corresponding to said opening portion
is provided to a user as an image through said mirror
for monitor and said finder.

15. A display apparatus as set forth in claim 13,
wherein a rectangular window having a rectangular
opening is arranged between said monitor and said mirror
for monitor,

5 said rectangular window is fixed to said casing,
among an image displayed on said monitor, the
image in a region corresponding to said opening portion
is provided to a user as an image through said mirror
for monitor and said finder.

10

16. A display apparatus as set forth in claim 13,
wherein one of a circular window and a rectangular
window is arranged between said finder and said mirror
for monitor,

5 said circular window or said rectangular window
is fixed to said casing;

among an image displayed on said monitor, the

image in a region corresponding to said opening portion
is provided to a user as an image through said mirror
10 for monitor and said finder.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
223

ABSTRACT OF THE DISCLOSURE

A camera system, in which user operates a camera to watch an image obtained by the camera, has a rotary mirror type camera assembly including a camera, a mirror for camera arranged in front of the camera with a given angle relative to a light axis of the camera, and a mirror rotating mechanism driving the mirror for the camera to rotate about the light axis of the camera, a rotary mirror type display apparatus including a monitor displaying an image picked up by the camera, a mirror for monitor arranged in front of the monitor with a given angle with respect to a display direction of the monitor, a finder permitting viewing of the image displayed on the monitor via the mirror for monitor, and a casing rotatable together with the mirror for monitor about an axis extending through substantially a center of the display screen of the monitor perpendicular to the display screen. The mirror for camera is rotated according to rotation of the casing and the mirror for monitor being fixed to the casing. When the casing is rotated, the mirror for monitor is rotated in display direction of the monitor in front of the monitor.

FIG. 1

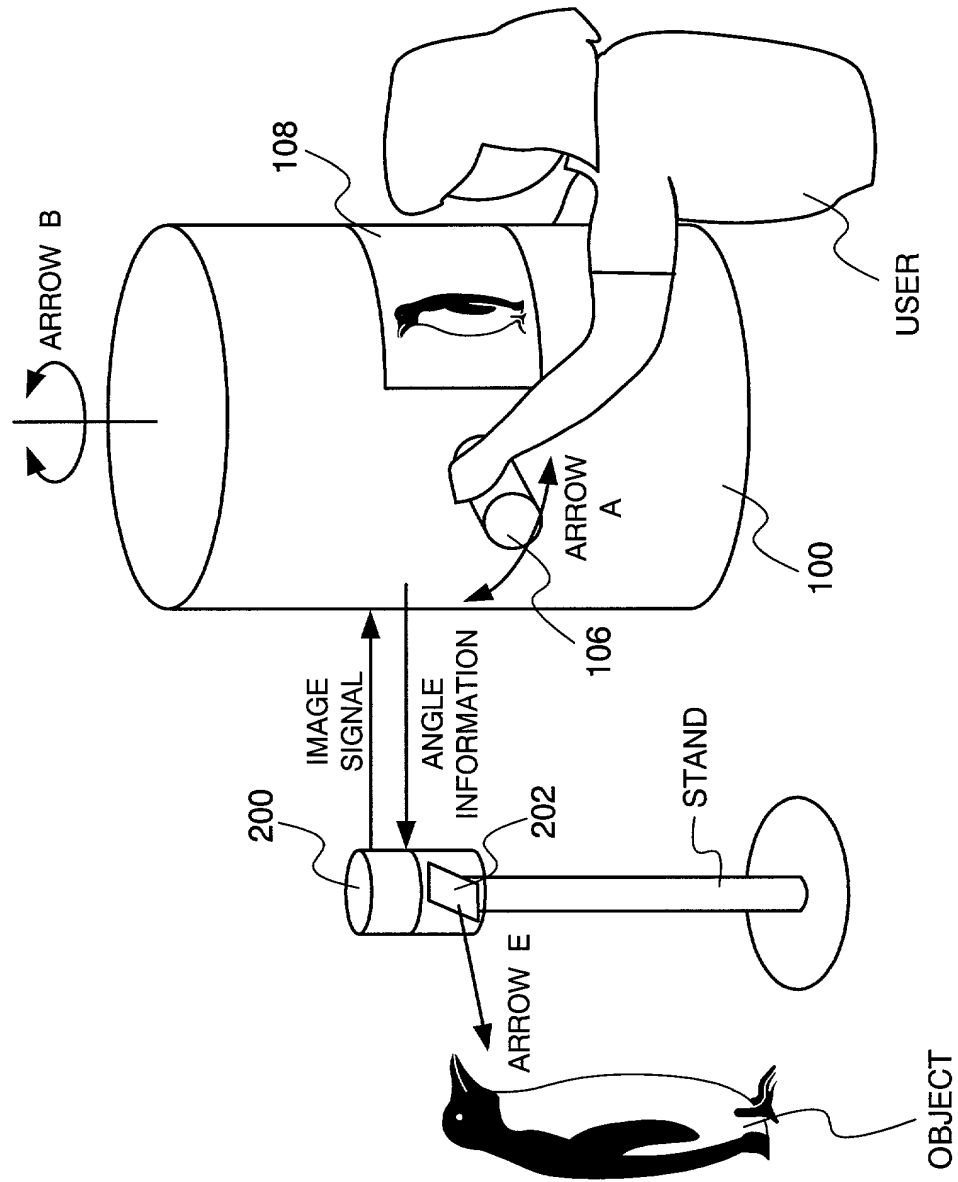


FIG. 2

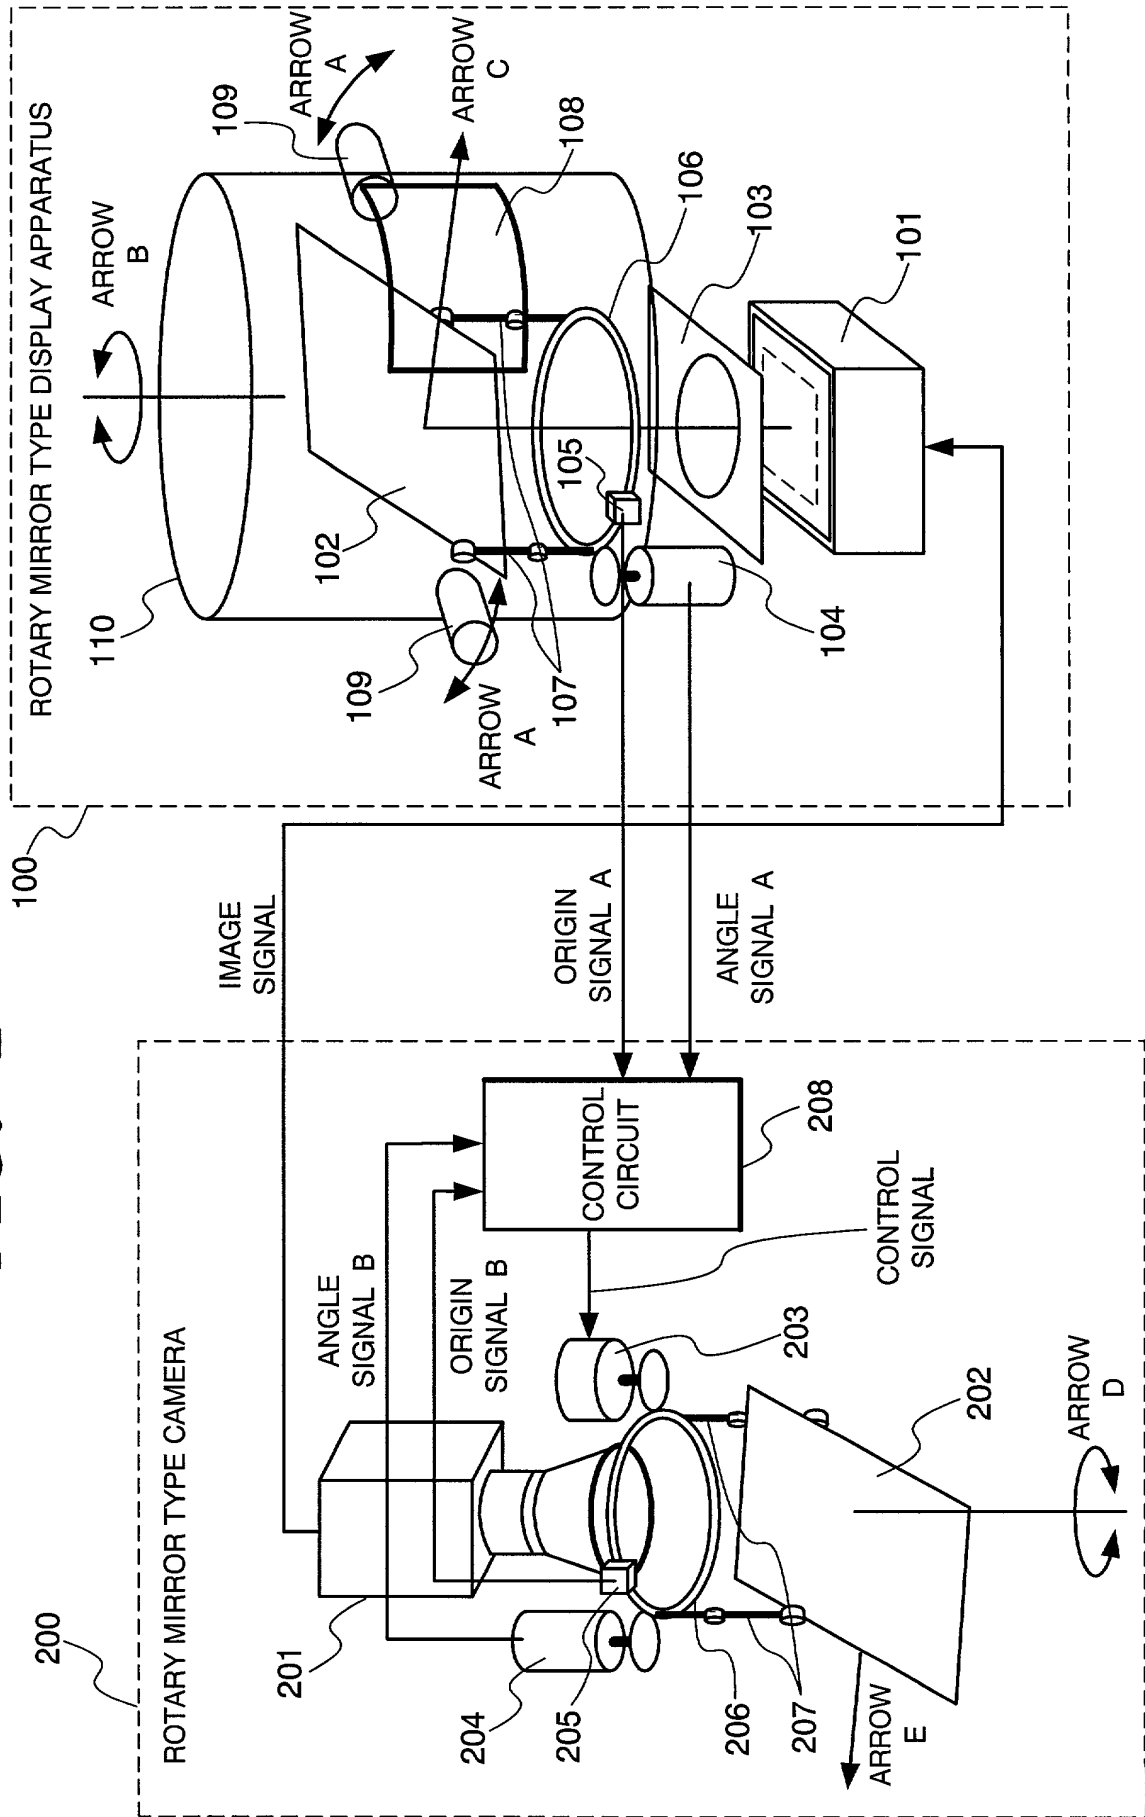


FIG. 3

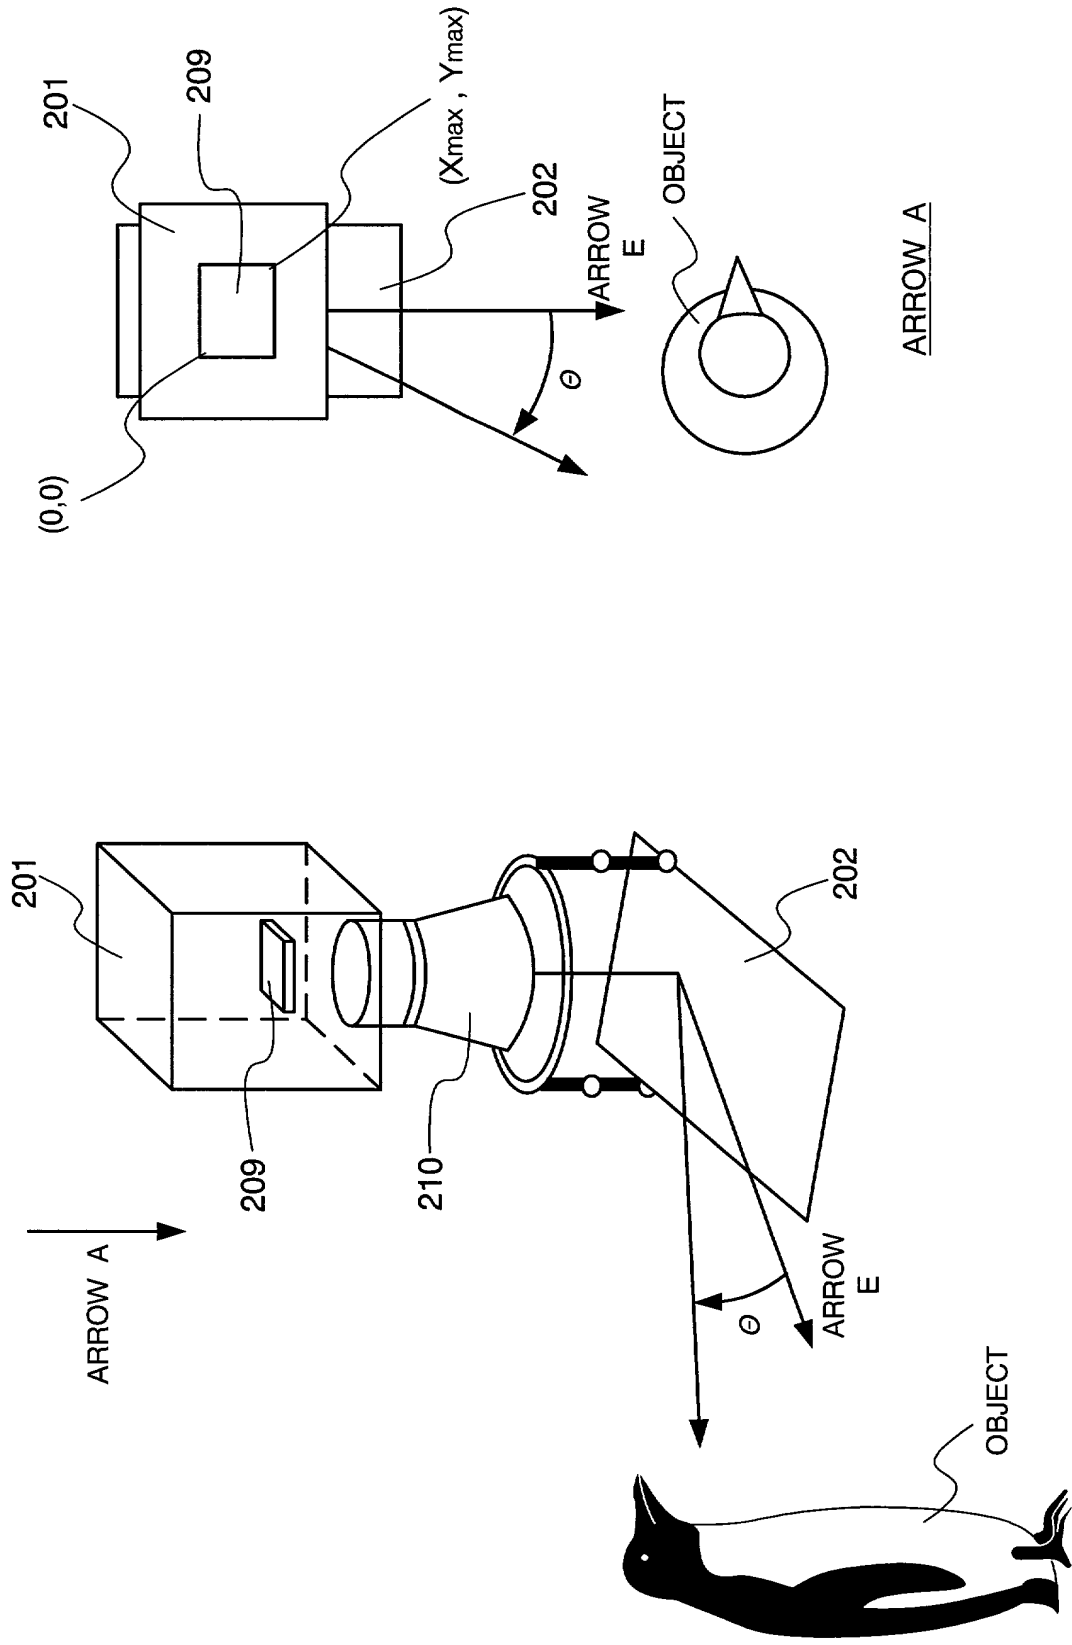
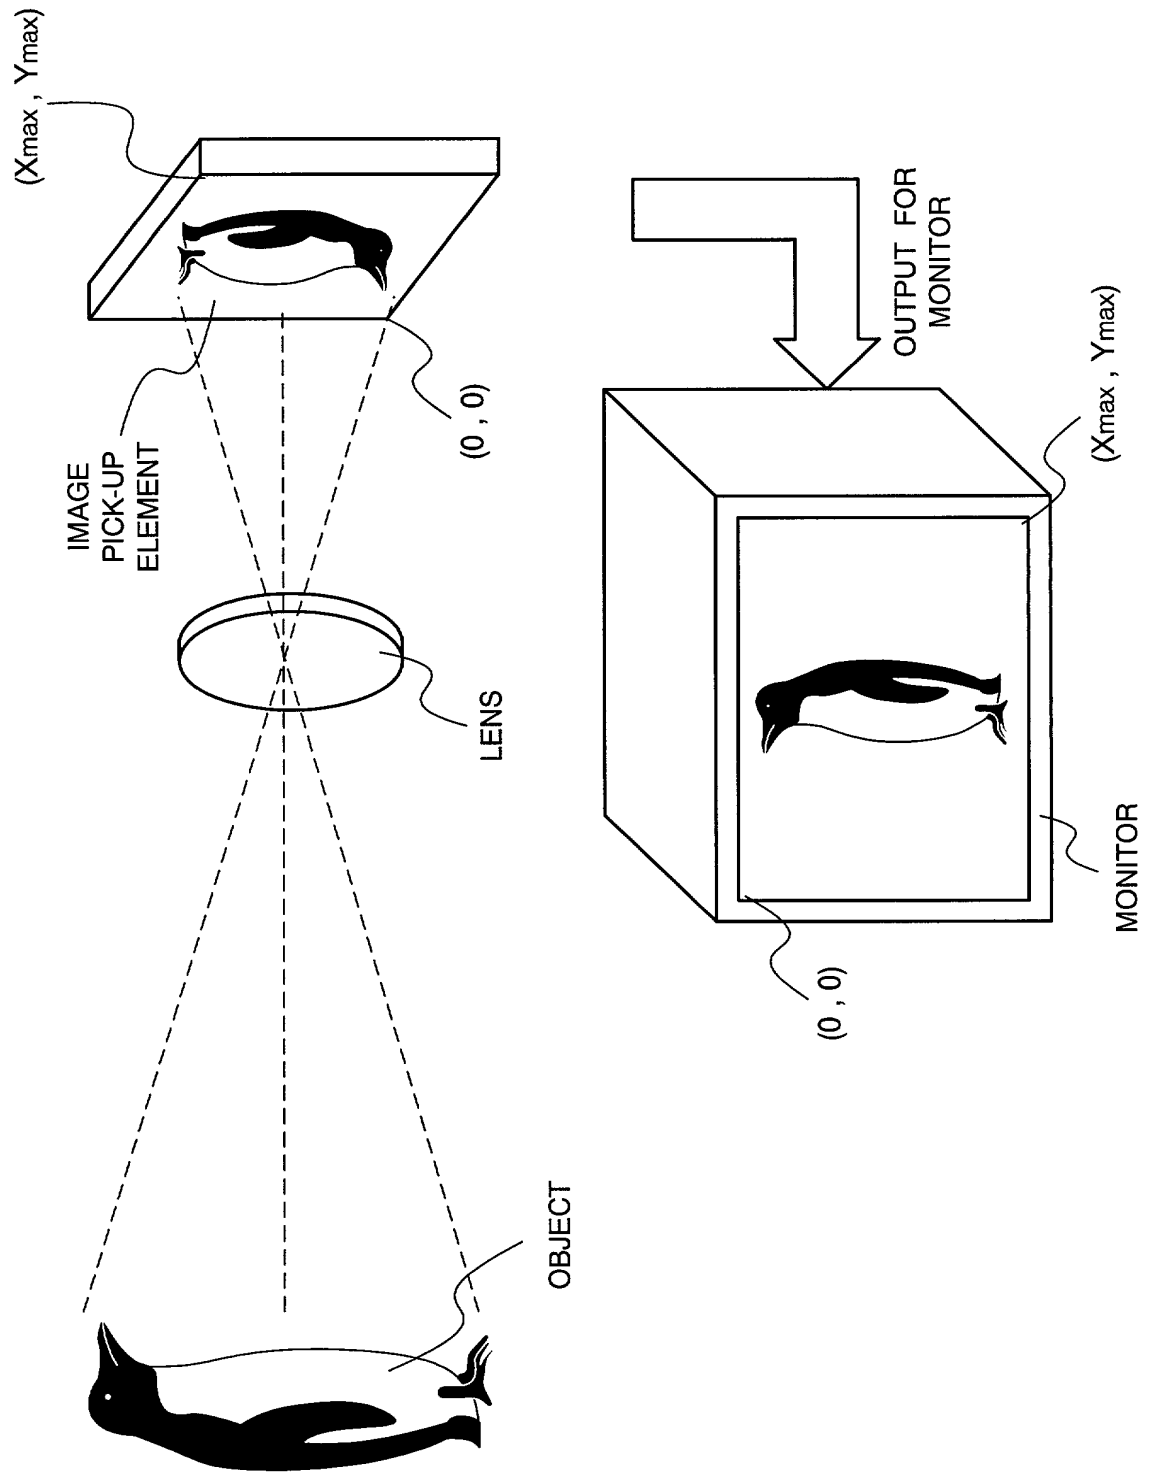


FIG. 4



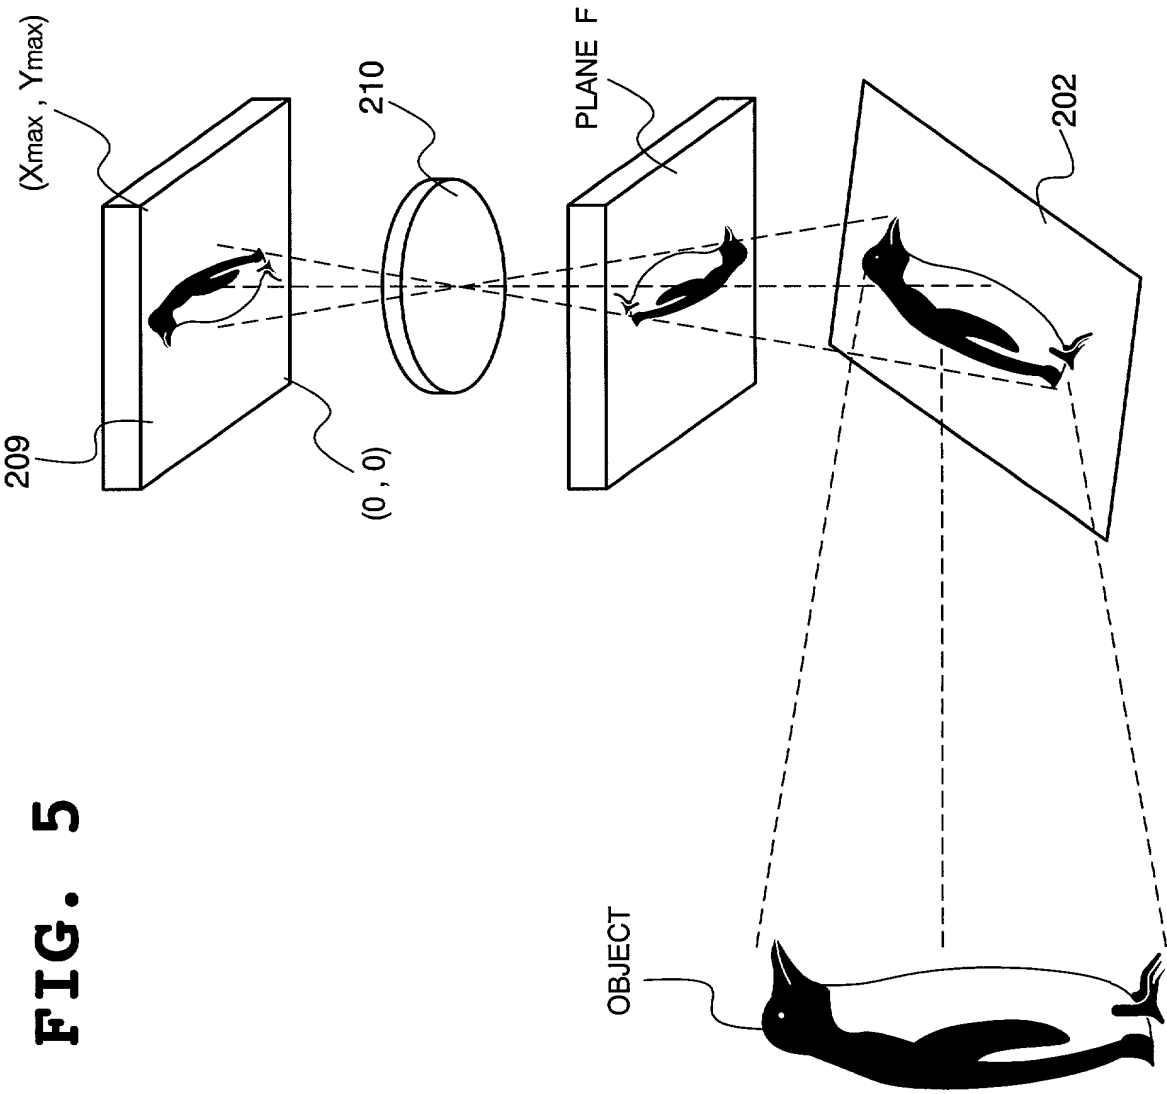


FIG. 6

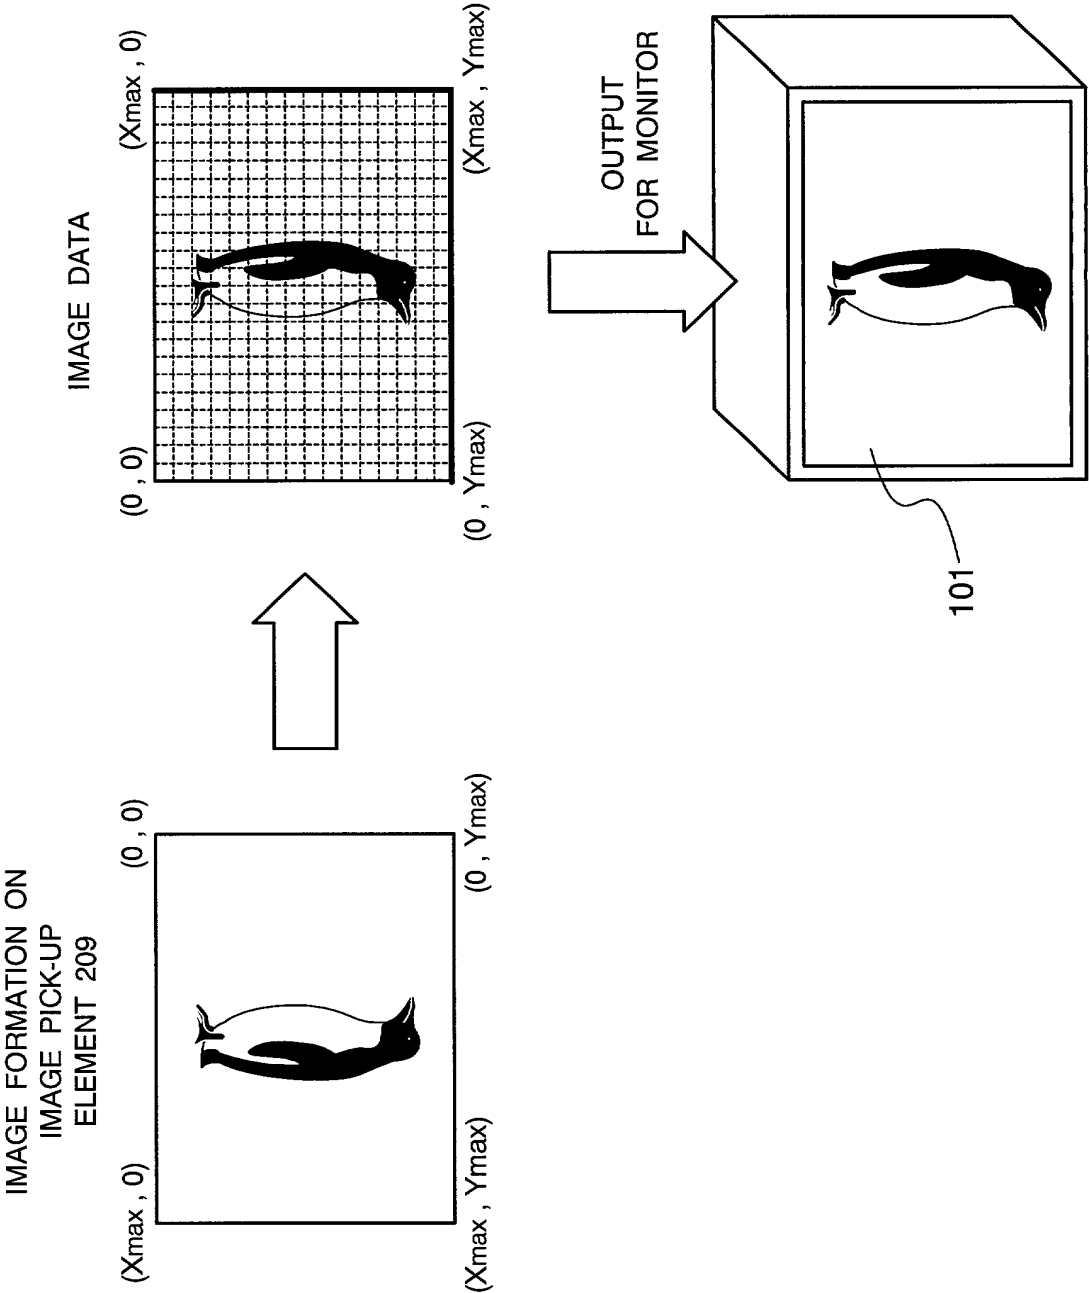


FIG. 8

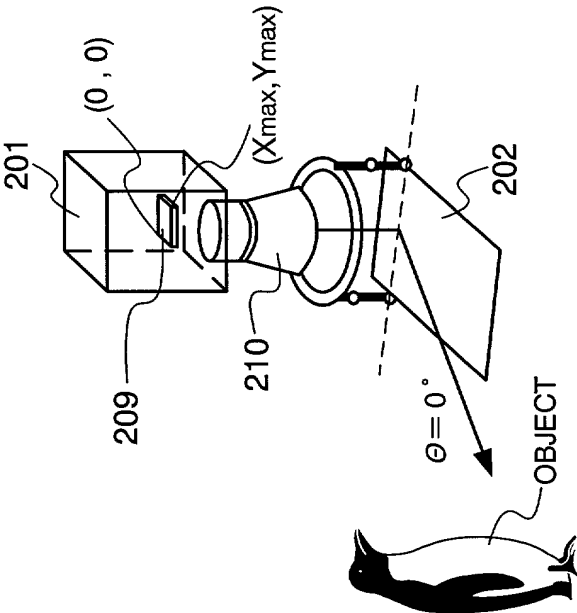
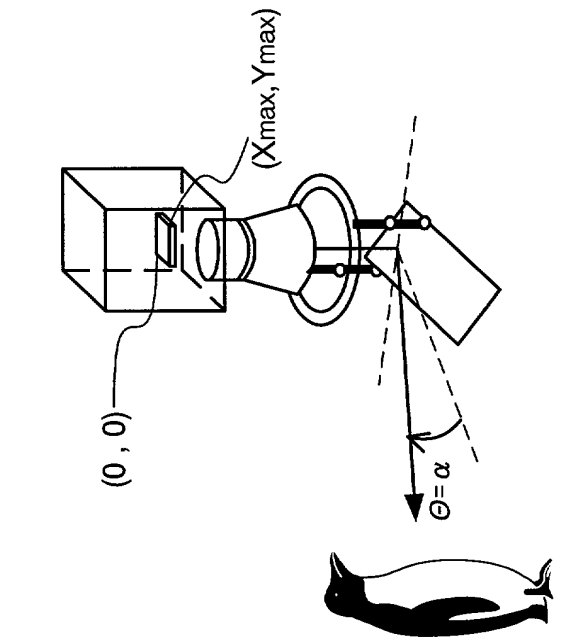
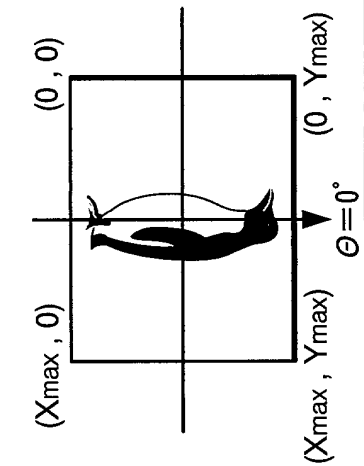
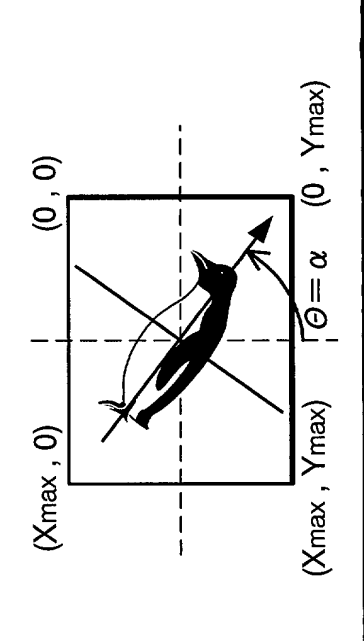
	<p>ANGULAR POSITION OF MIRROR $\theta = 0^\circ$</p>	<p>MIRROR IS ROTATED OVER $\theta = \alpha$</p>
<p>BEHAVIOR OF ROTARY MIRROR TYPE CAMERA 200</p>	 <p>Diagram illustrating the behavior of a rotary mirror type camera 200. The camera is shown in a side view. An object (penguin) is positioned at the origin $(0, 0)$. The mirror 202 is positioned at (X_{max}, Y_{max}). The image pick-up element 209 is positioned at $(0, 0)$. The angle θ is 0°.</p>	 <p>Diagram illustrating the behavior of a rotary mirror type camera 200. The camera is shown in a side view. An object (penguin) is positioned at the origin $(0, 0)$. The mirror 202 is positioned at (X_{max}, Y_{max}). The image pick-up element 209 is positioned at $(0, 0)$. The angle θ is α.</p>
<p>MANNER OF IMAGE FORMATION ON IMAGE PICK-UP ELEMENT 209 AS VIEWED FROM PHOTOSENSITIVE SURFACE SIDE</p>	 <p>Diagram illustrating the manner of image formation on the image pick-up element 209 as viewed from the photosensitive surface side. The image is shown as a penguin at the origin $(0, 0)$. The angle θ is 0°.</p>	 <p>Diagram illustrating the manner of image formation on the image pick-up element 209 as viewed from the photosensitive surface side. The image is shown as a penguin at the origin $(0, 0)$. The angle θ is α.</p>

FIG. 9

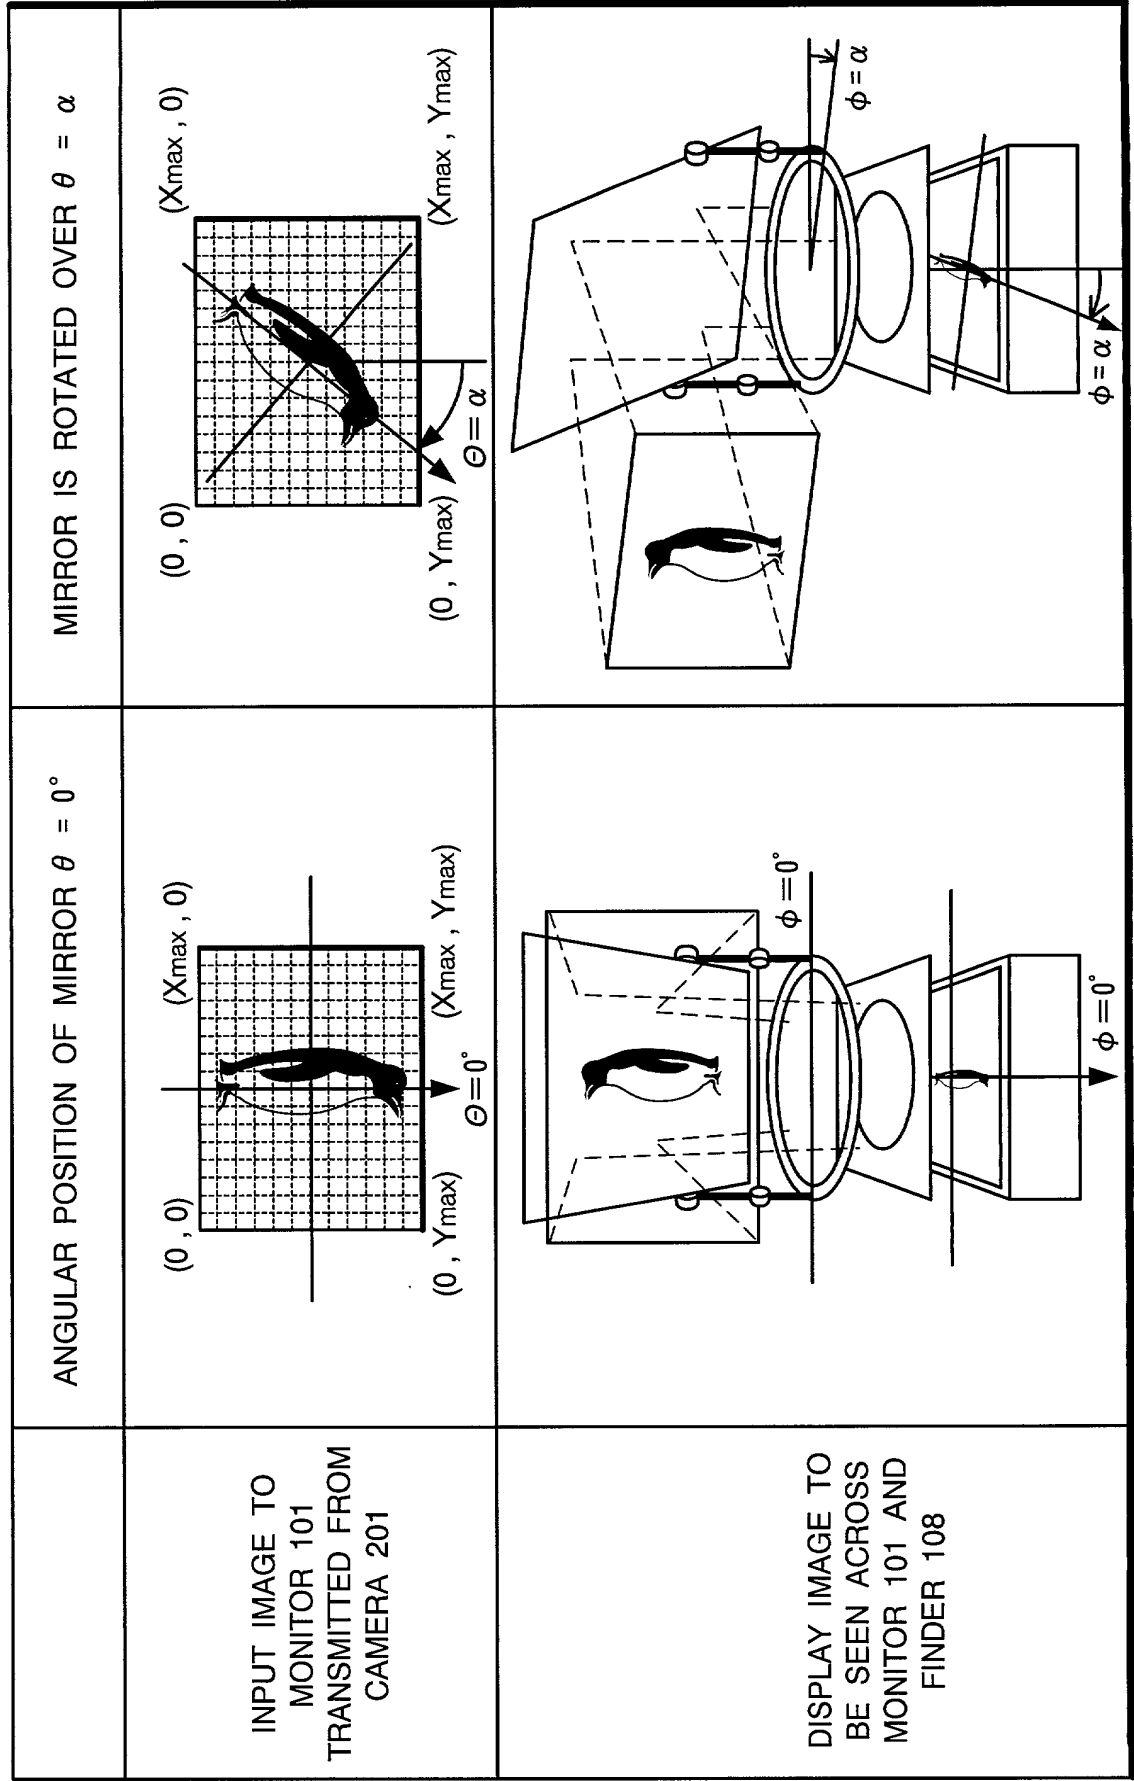


FIG. 10

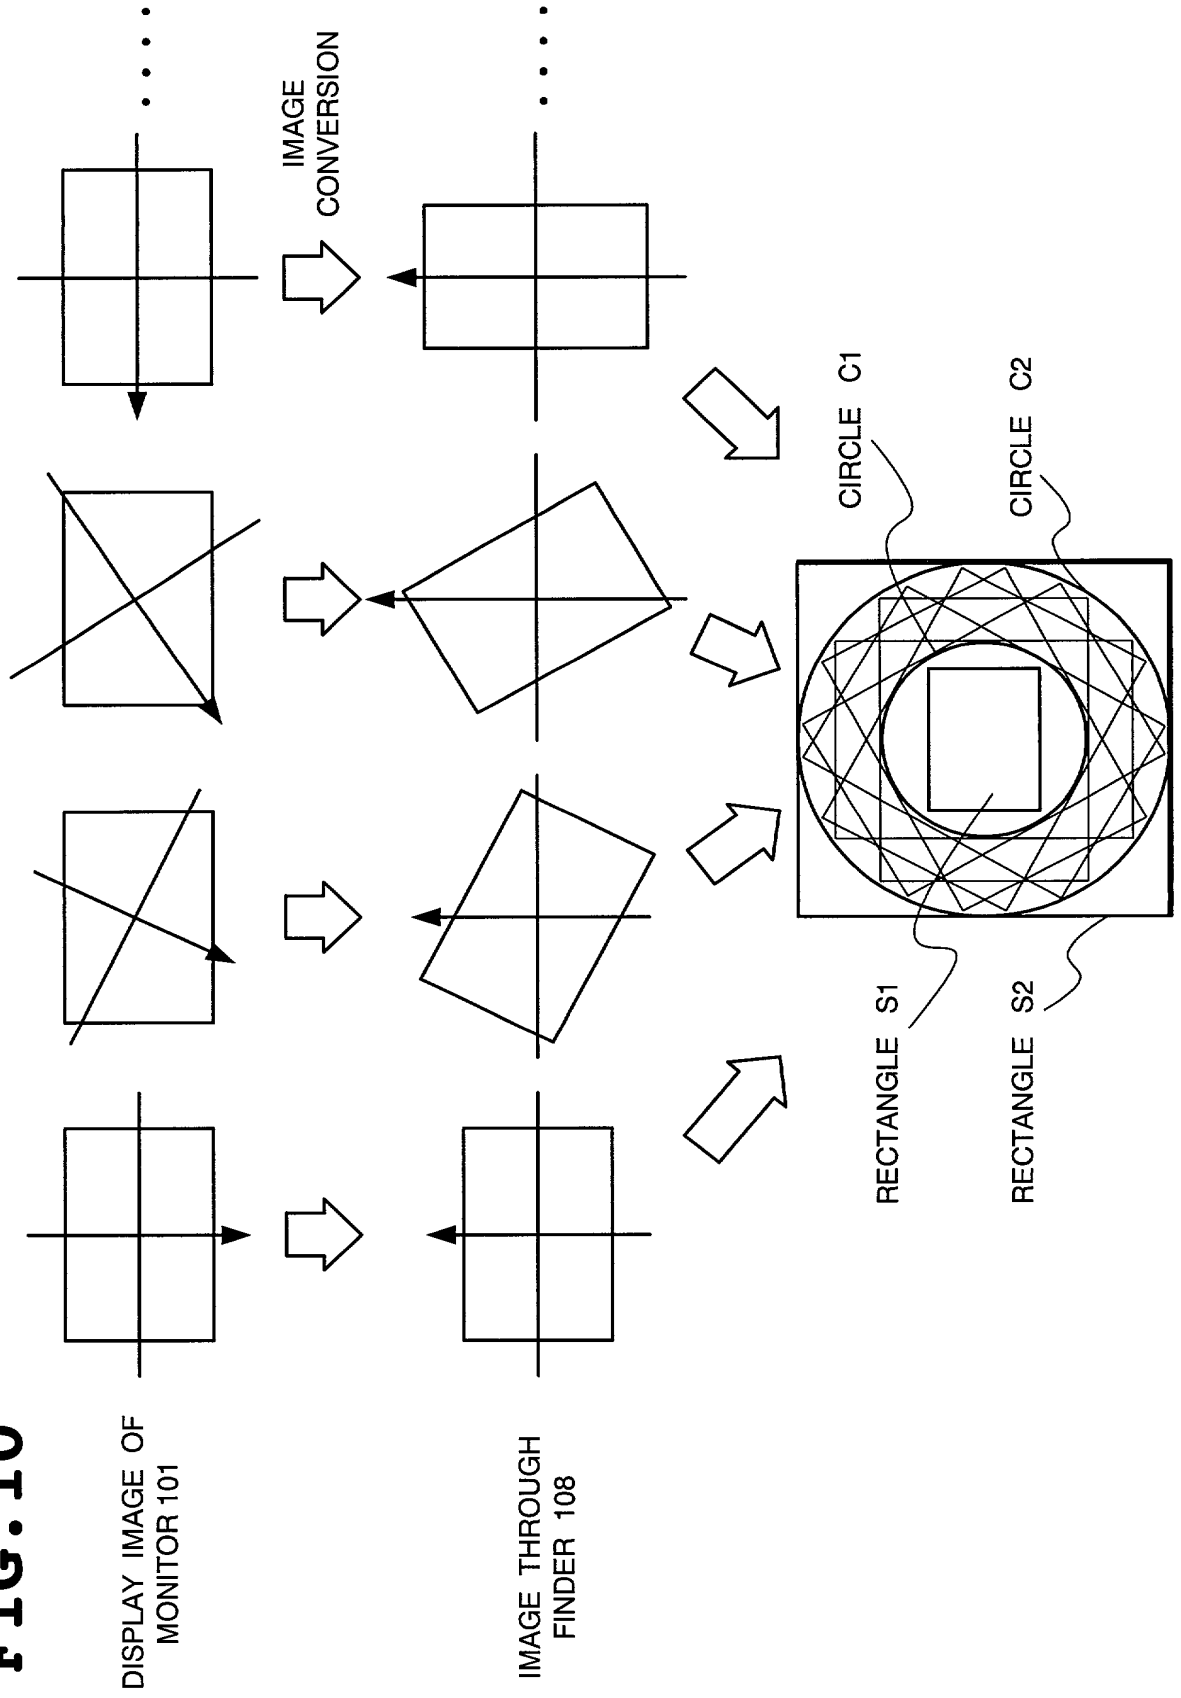


FIG. 11

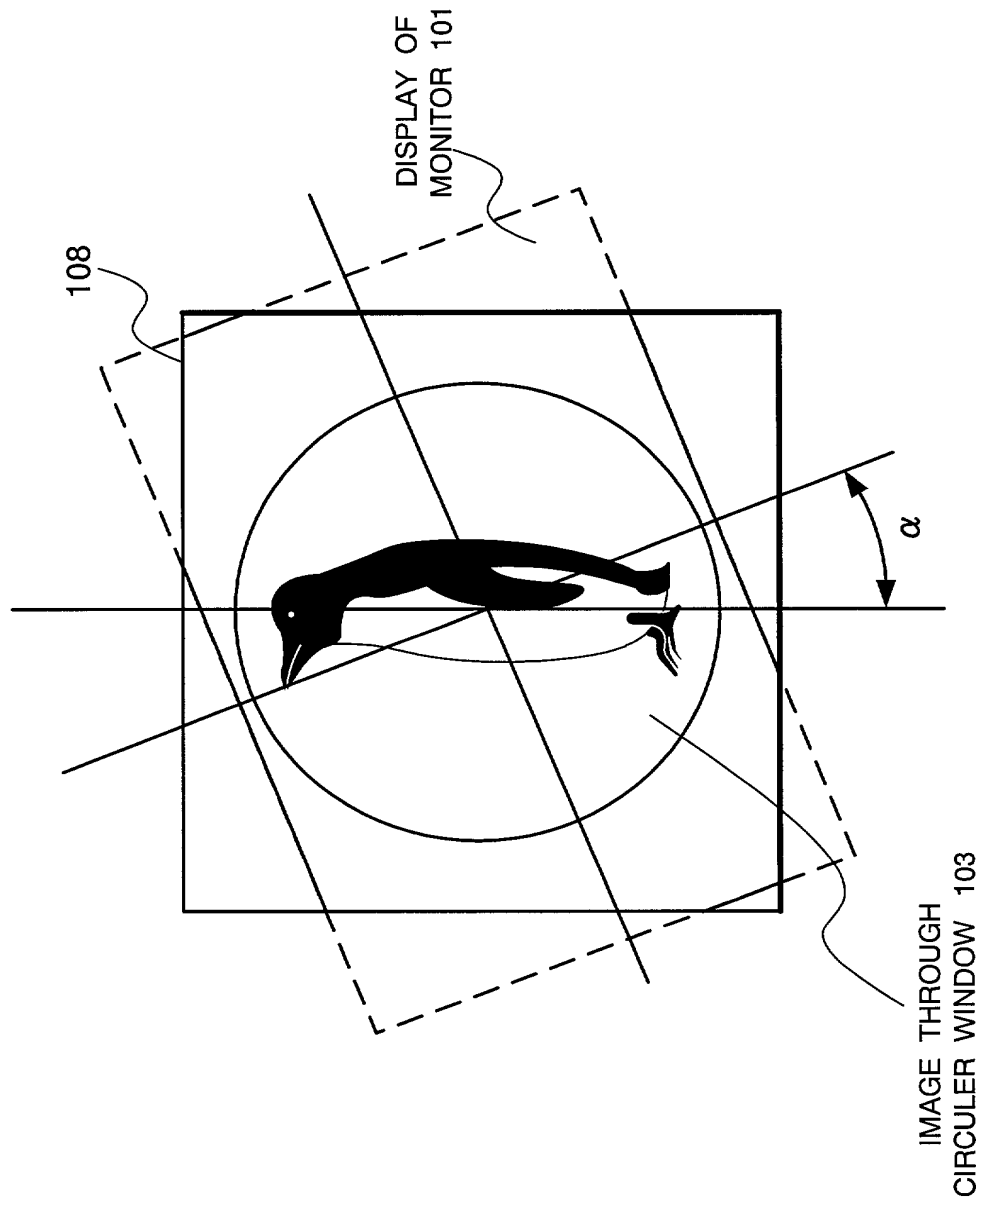


FIG. 12

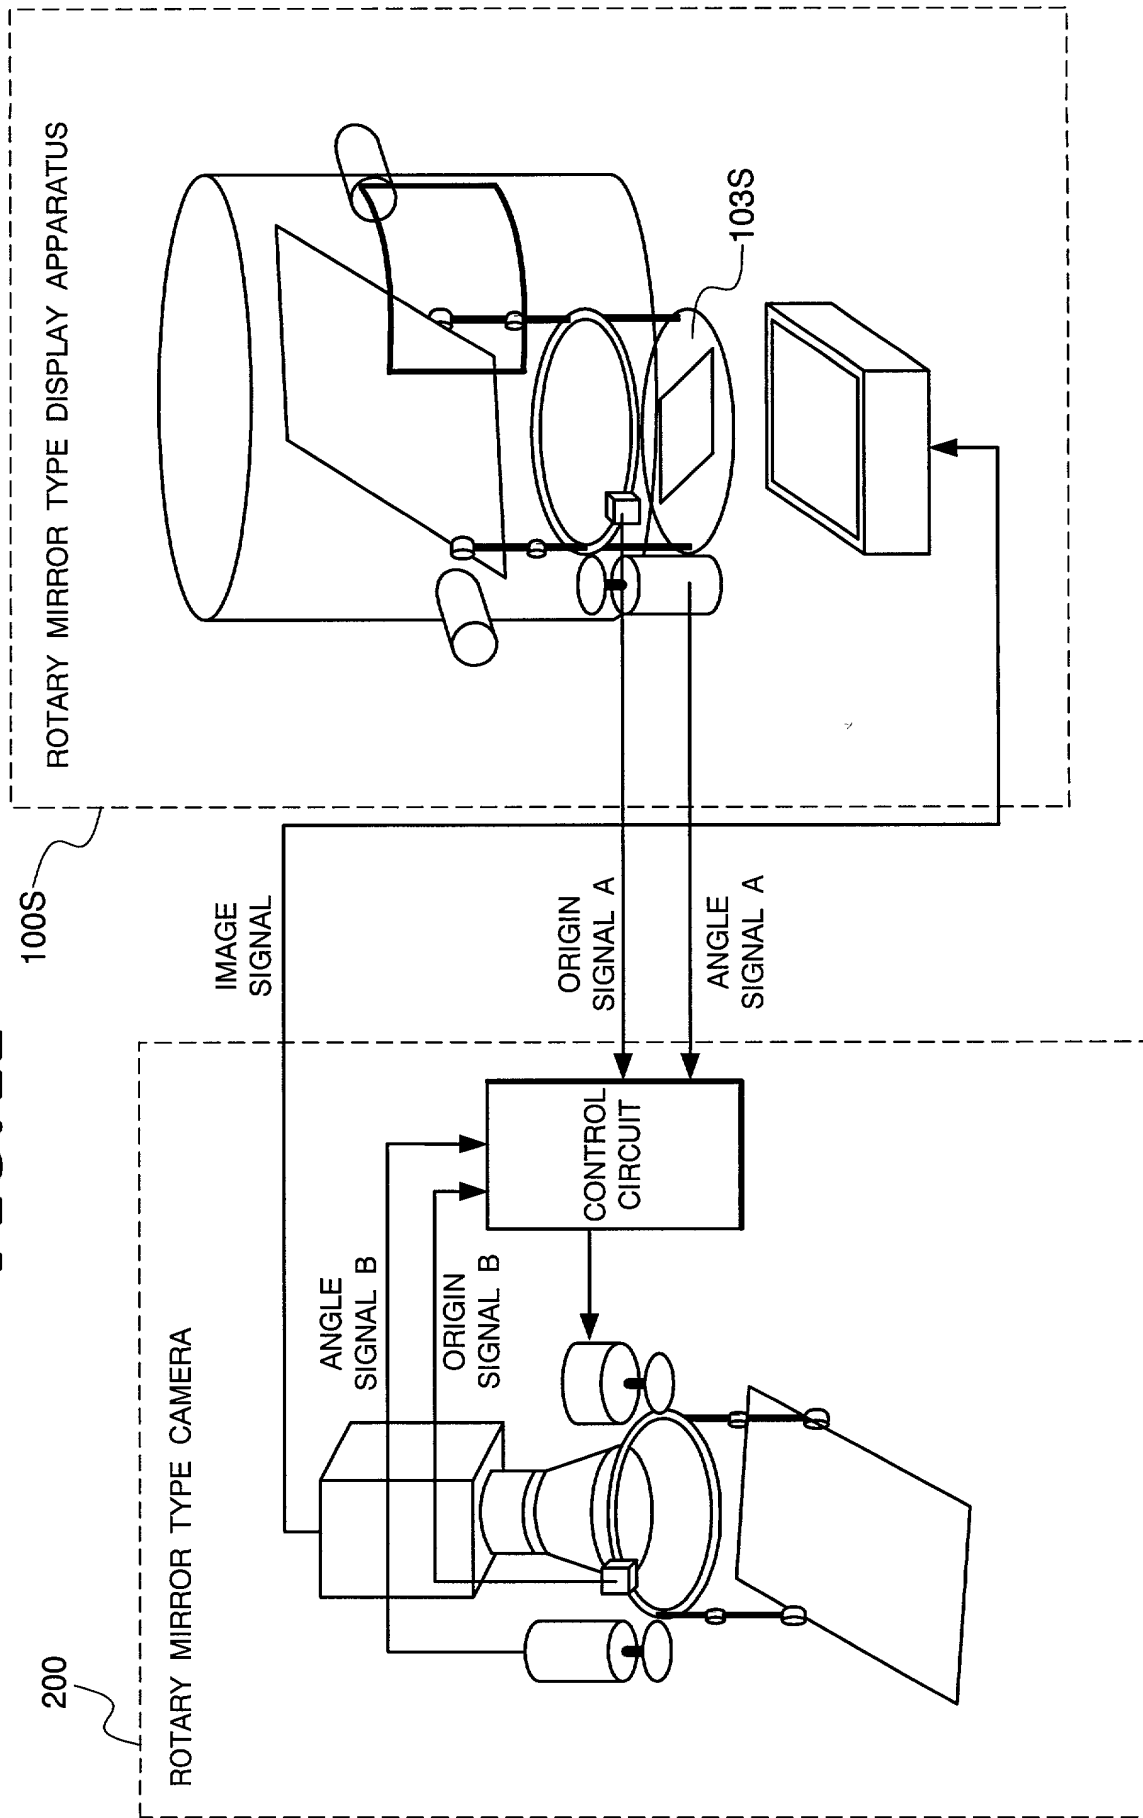


FIG. 13

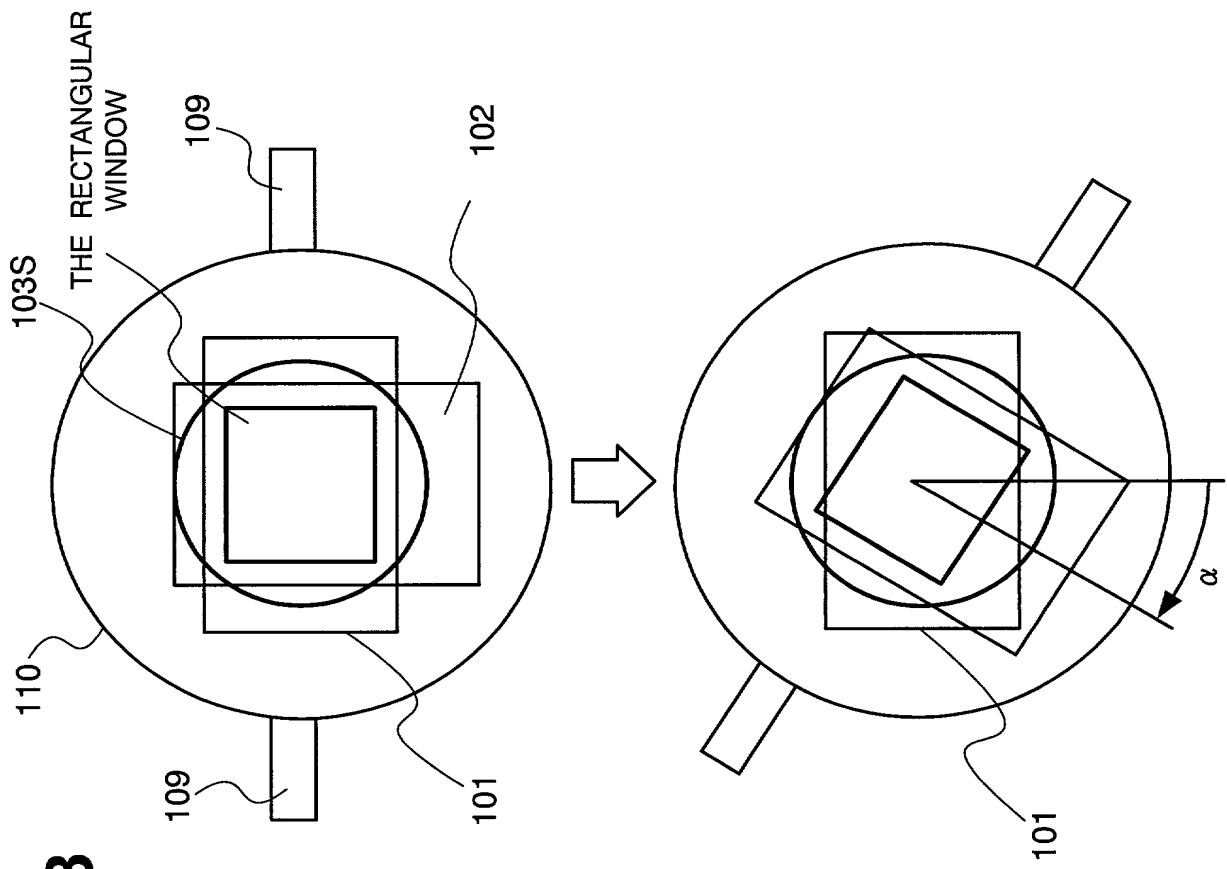


FIG. 14

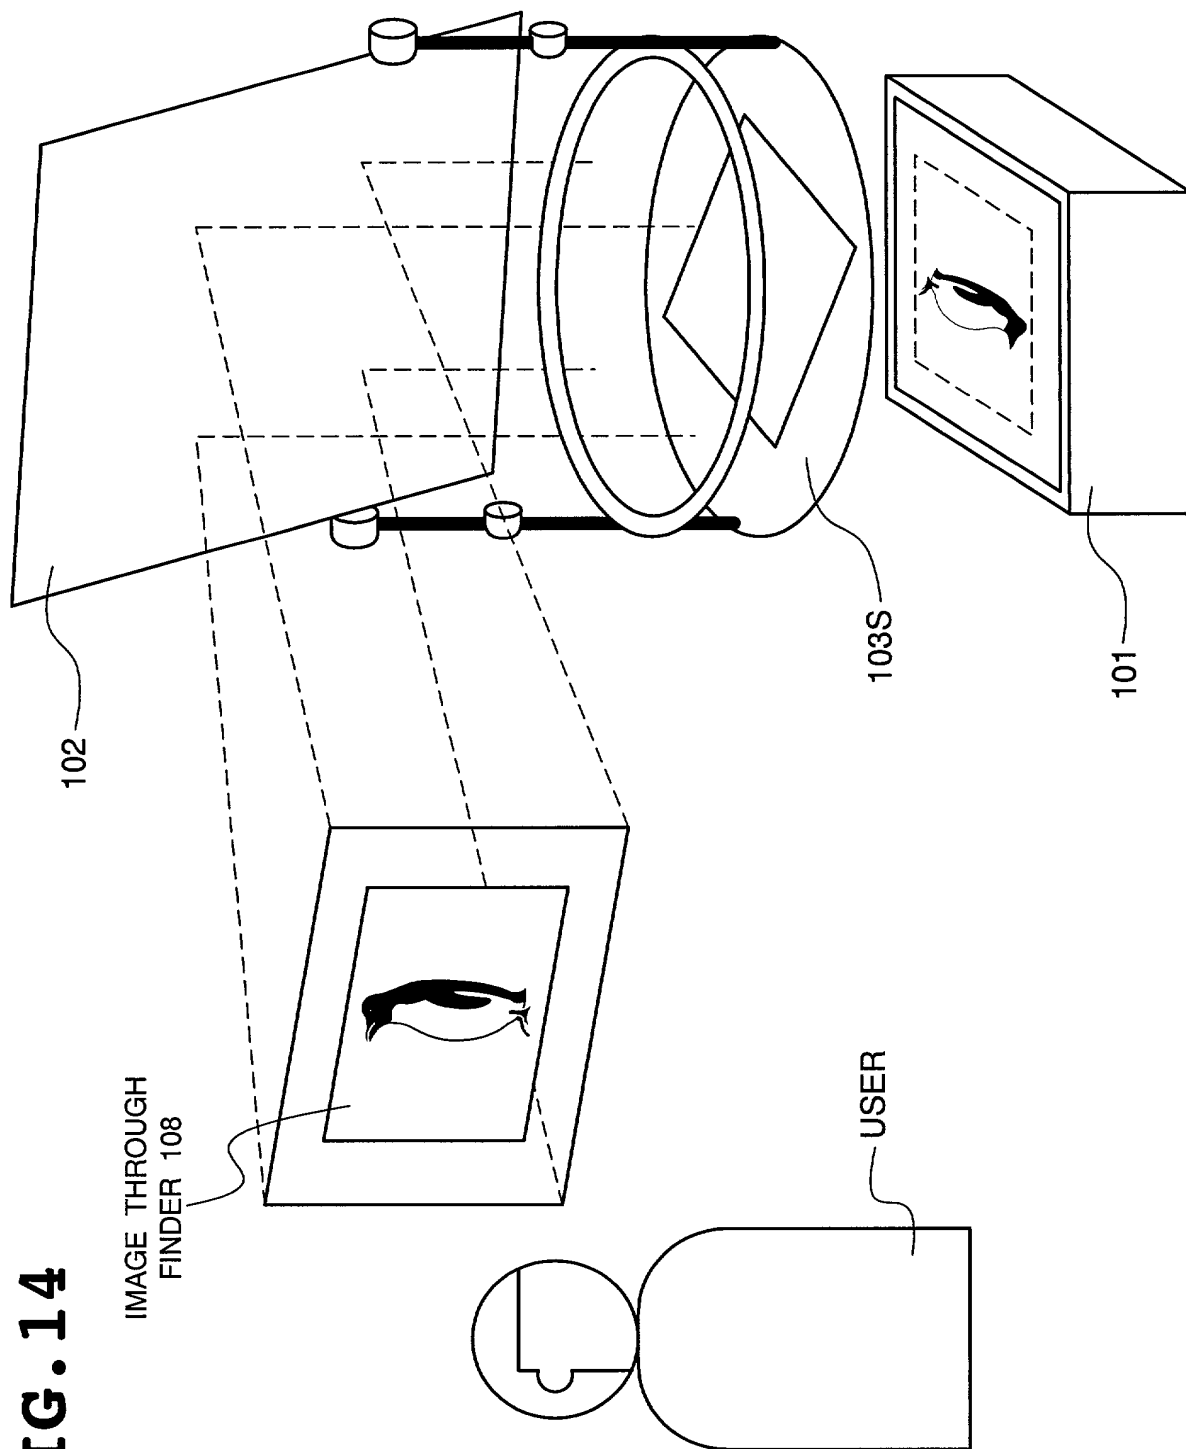


FIG. 15

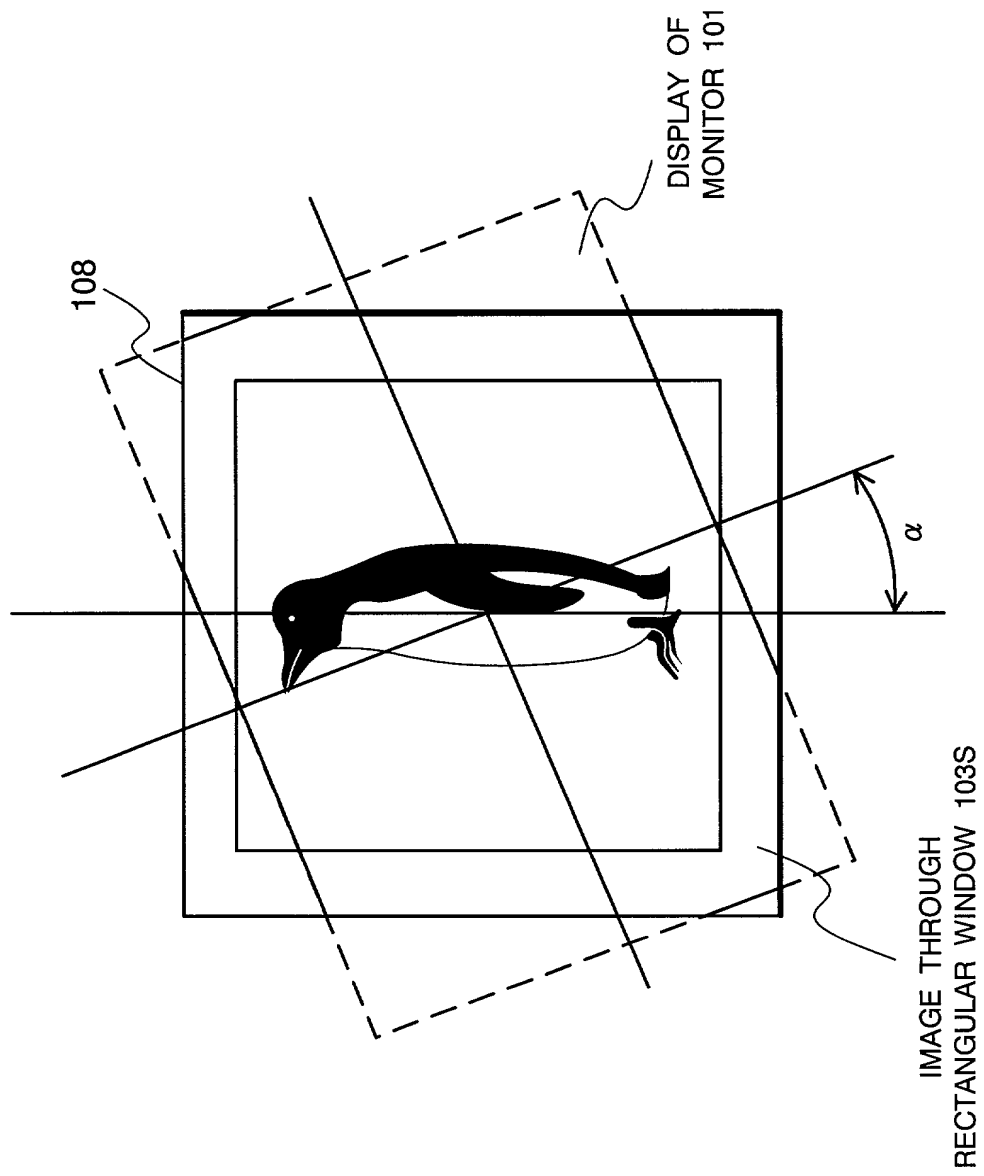


FIG. 16

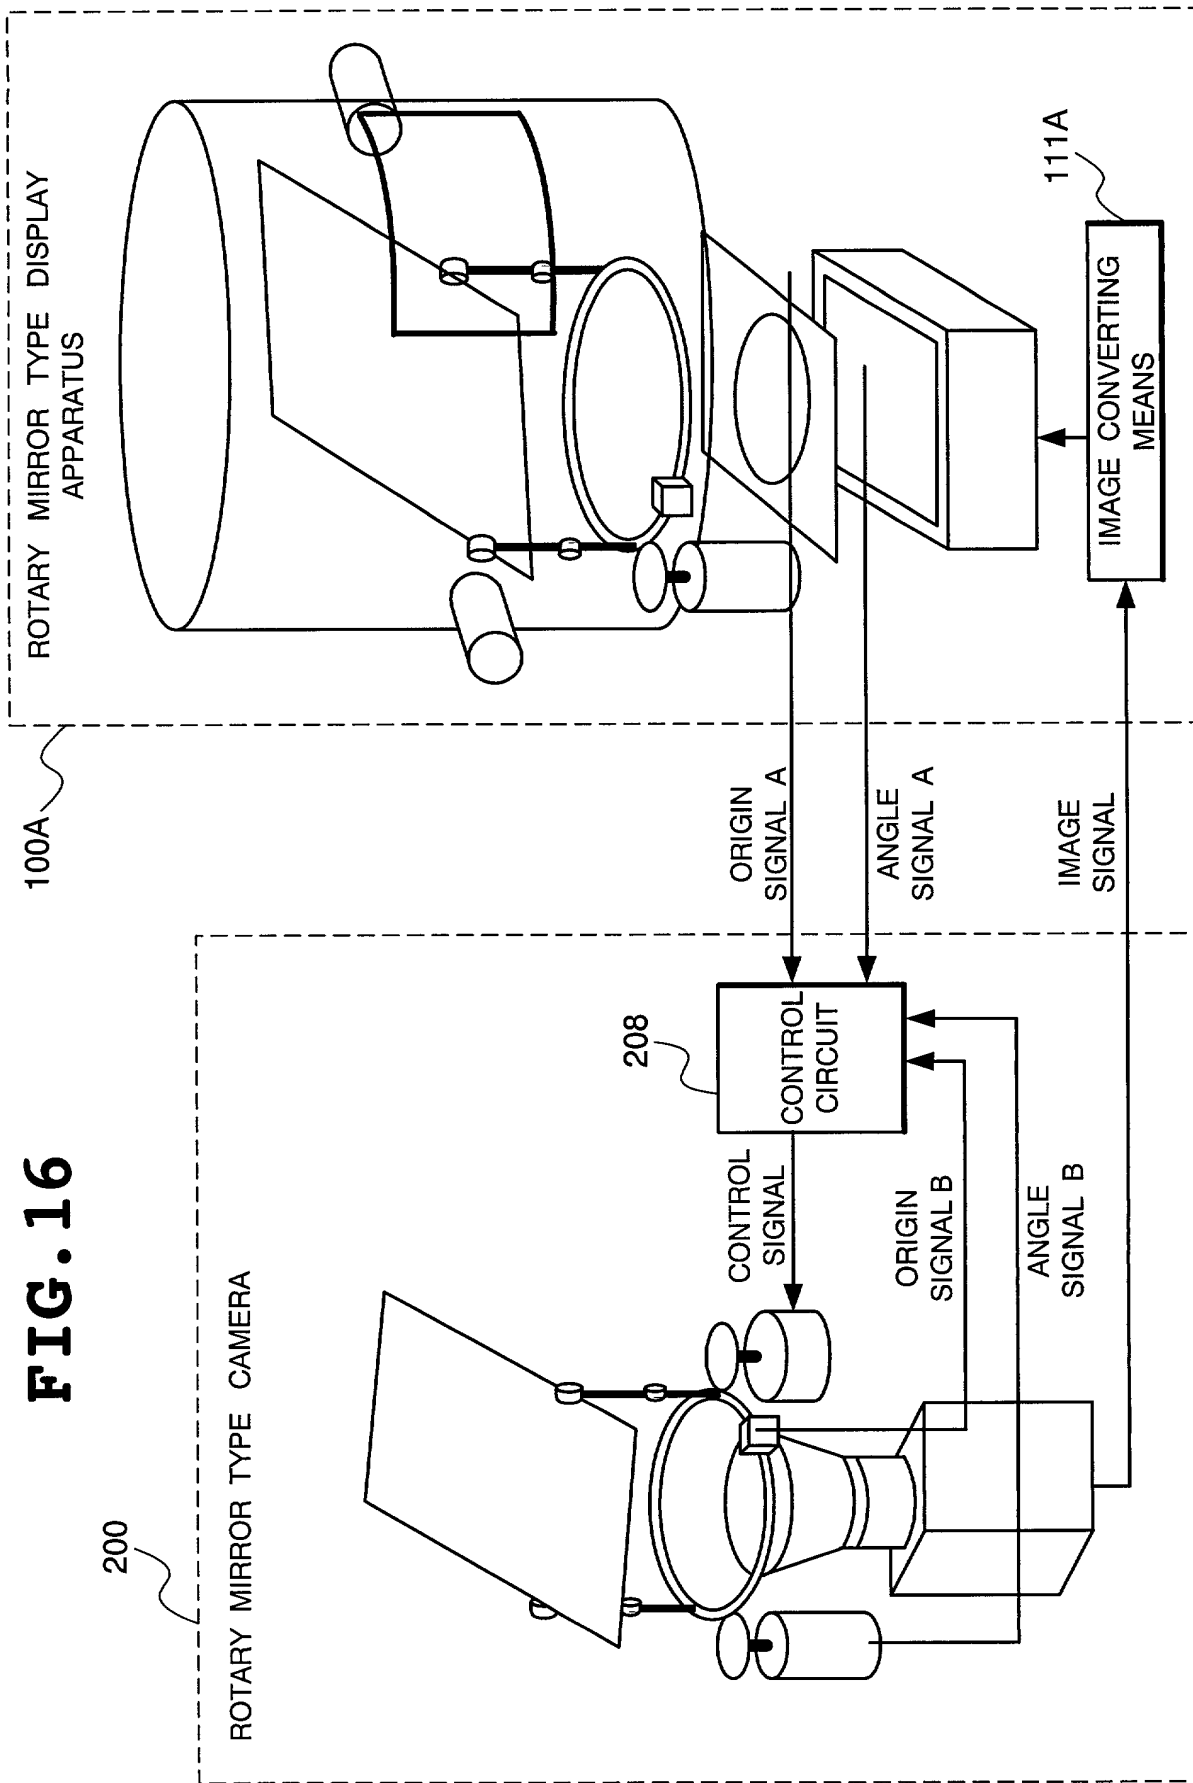


FIG. 17

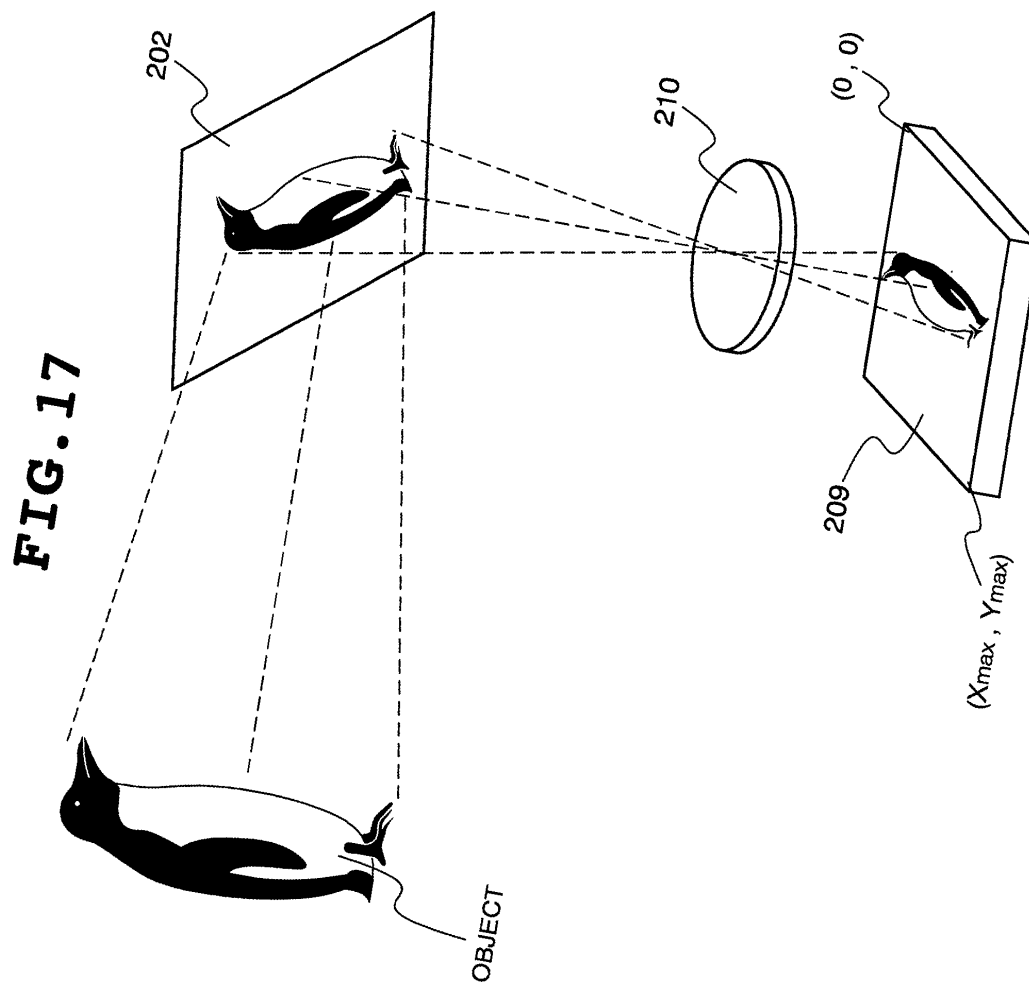
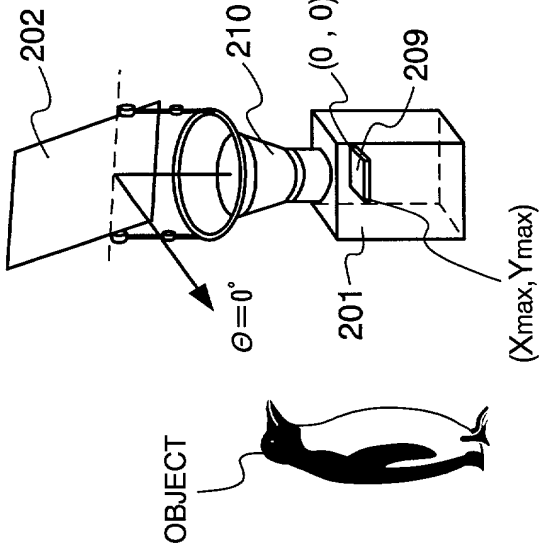
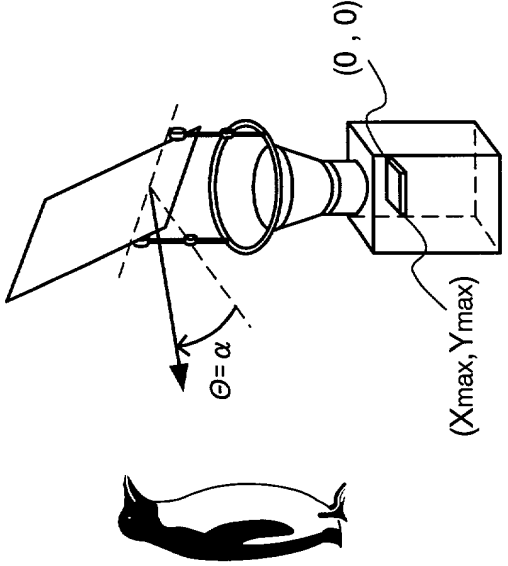
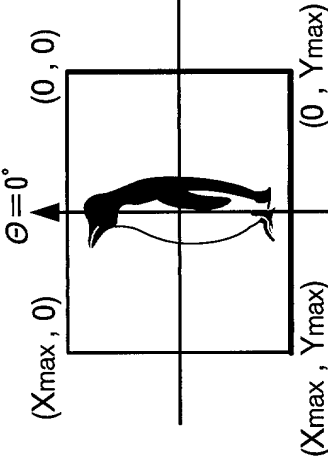
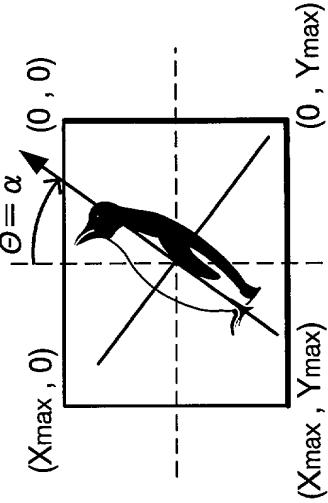


FIG. 18

	ANGULAR POSITION OF MIRROR $\theta = 0^\circ$	MIRROR IS ROTATED OVER $\theta = \alpha$
CONDITION OF ROTARY MIRROR TYPE CAMERA 200		
MANNER OF IMAGE FORMATION ON IMAGE PICK-UP ELEMENT 209 AS VIEWED FROM PHOTOSENSITIVE SURFACE SIDE		

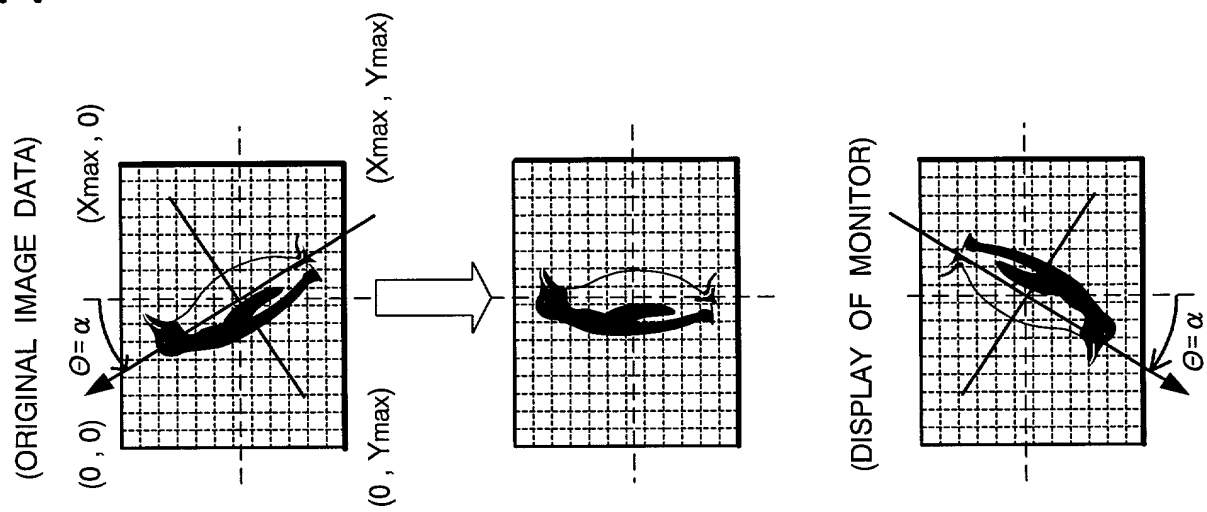
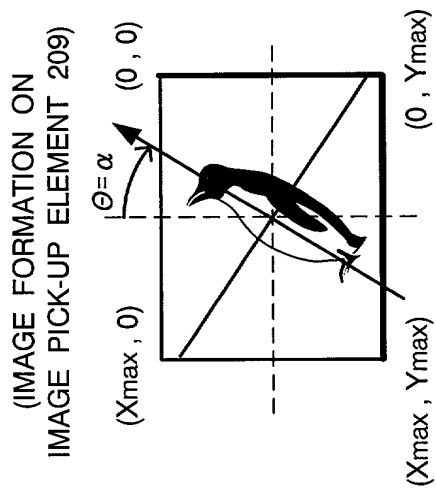


FIG. 19

FIG. 20

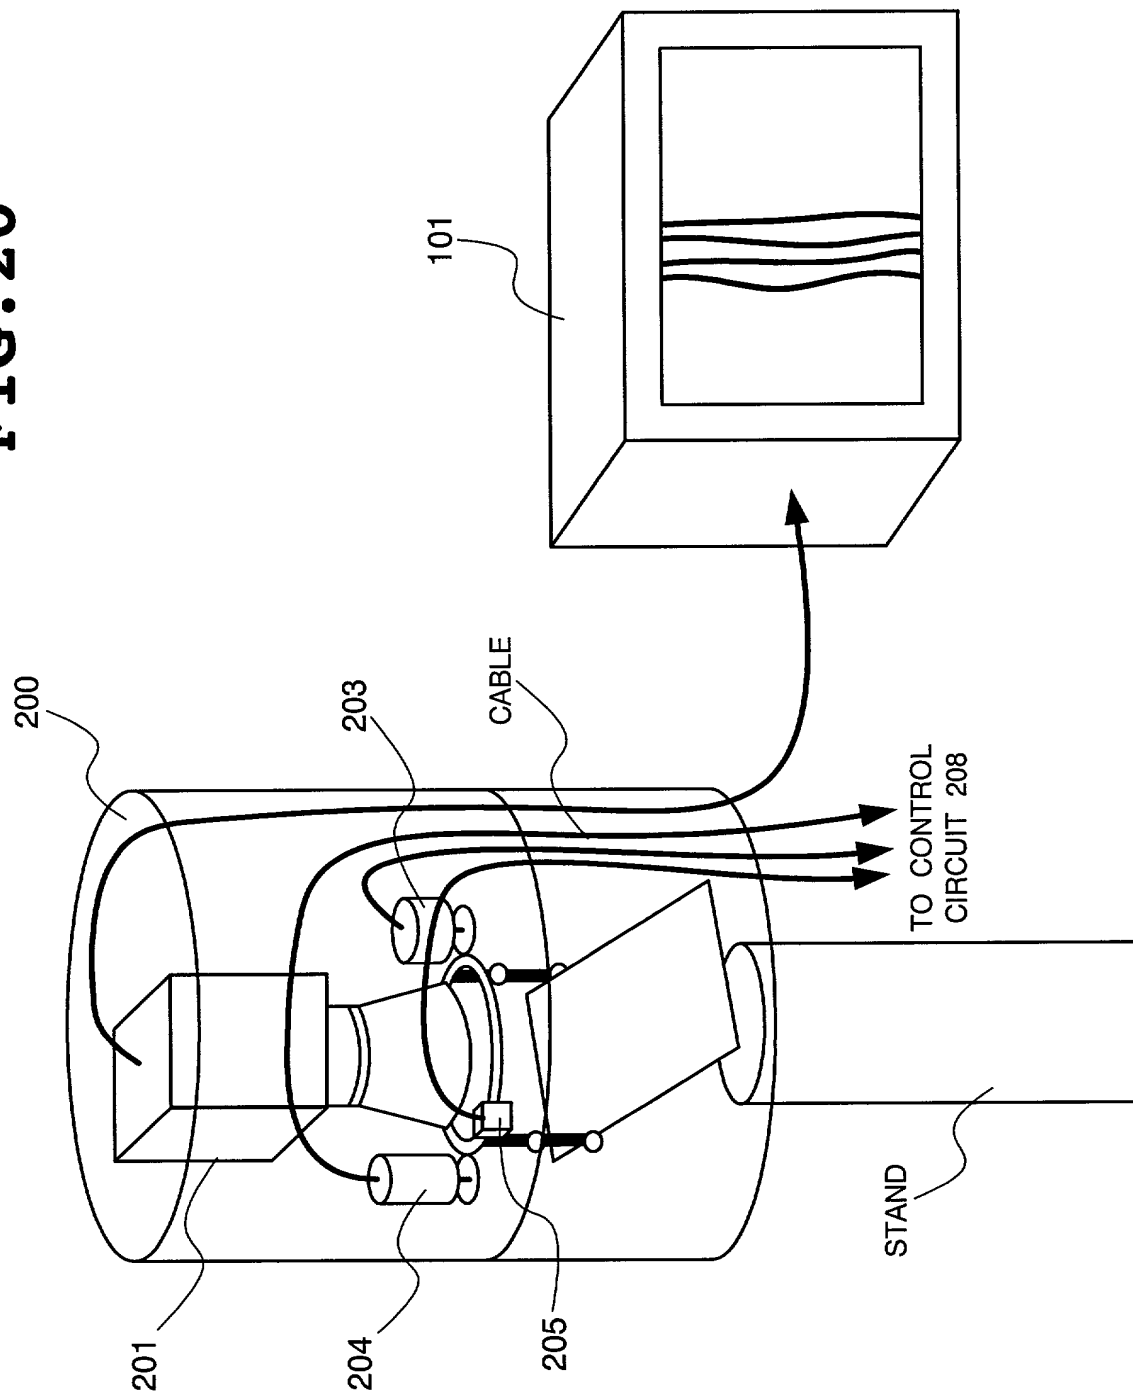


FIG. 21

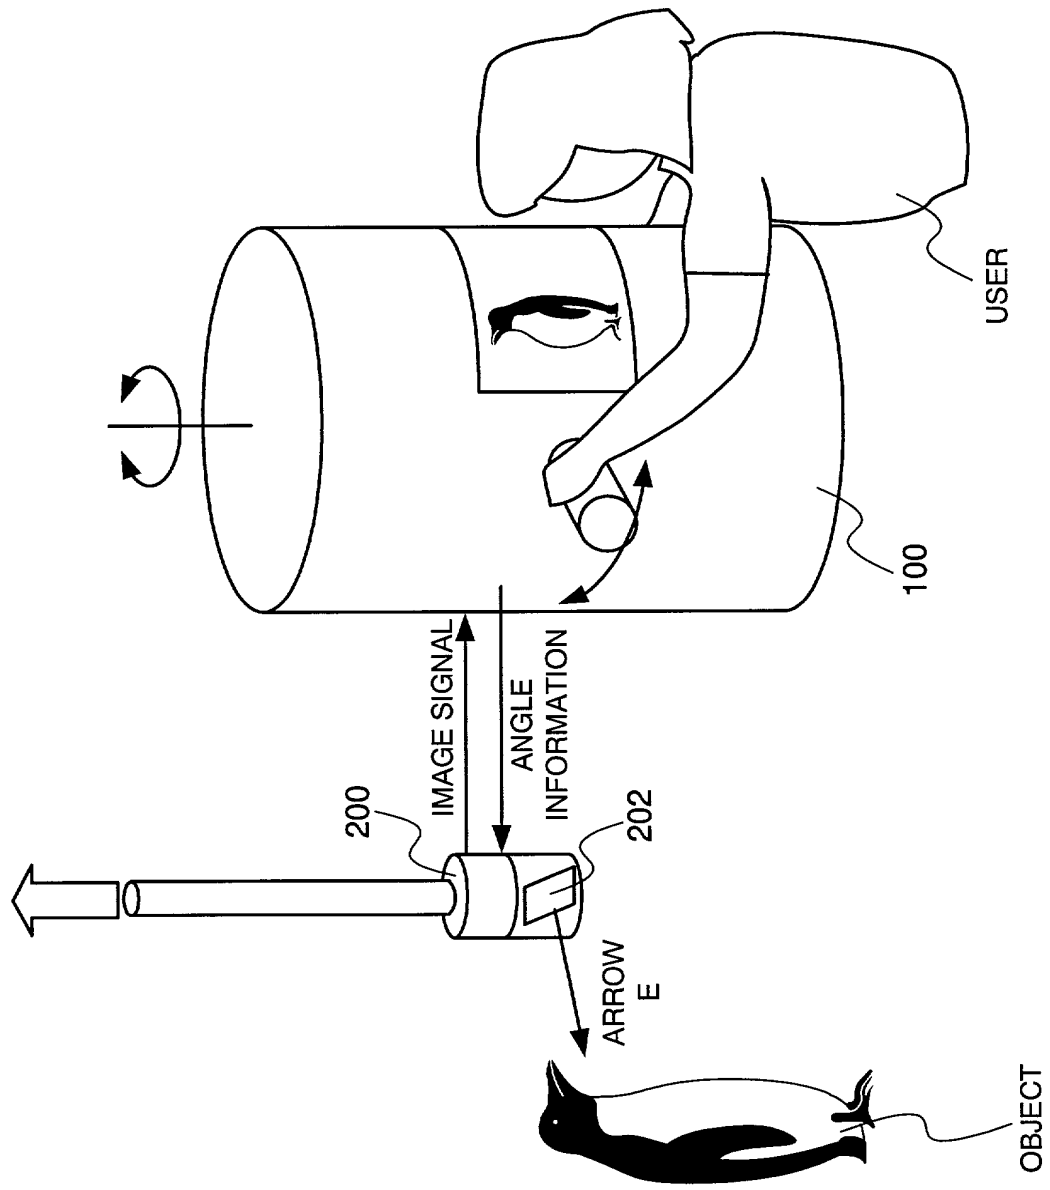


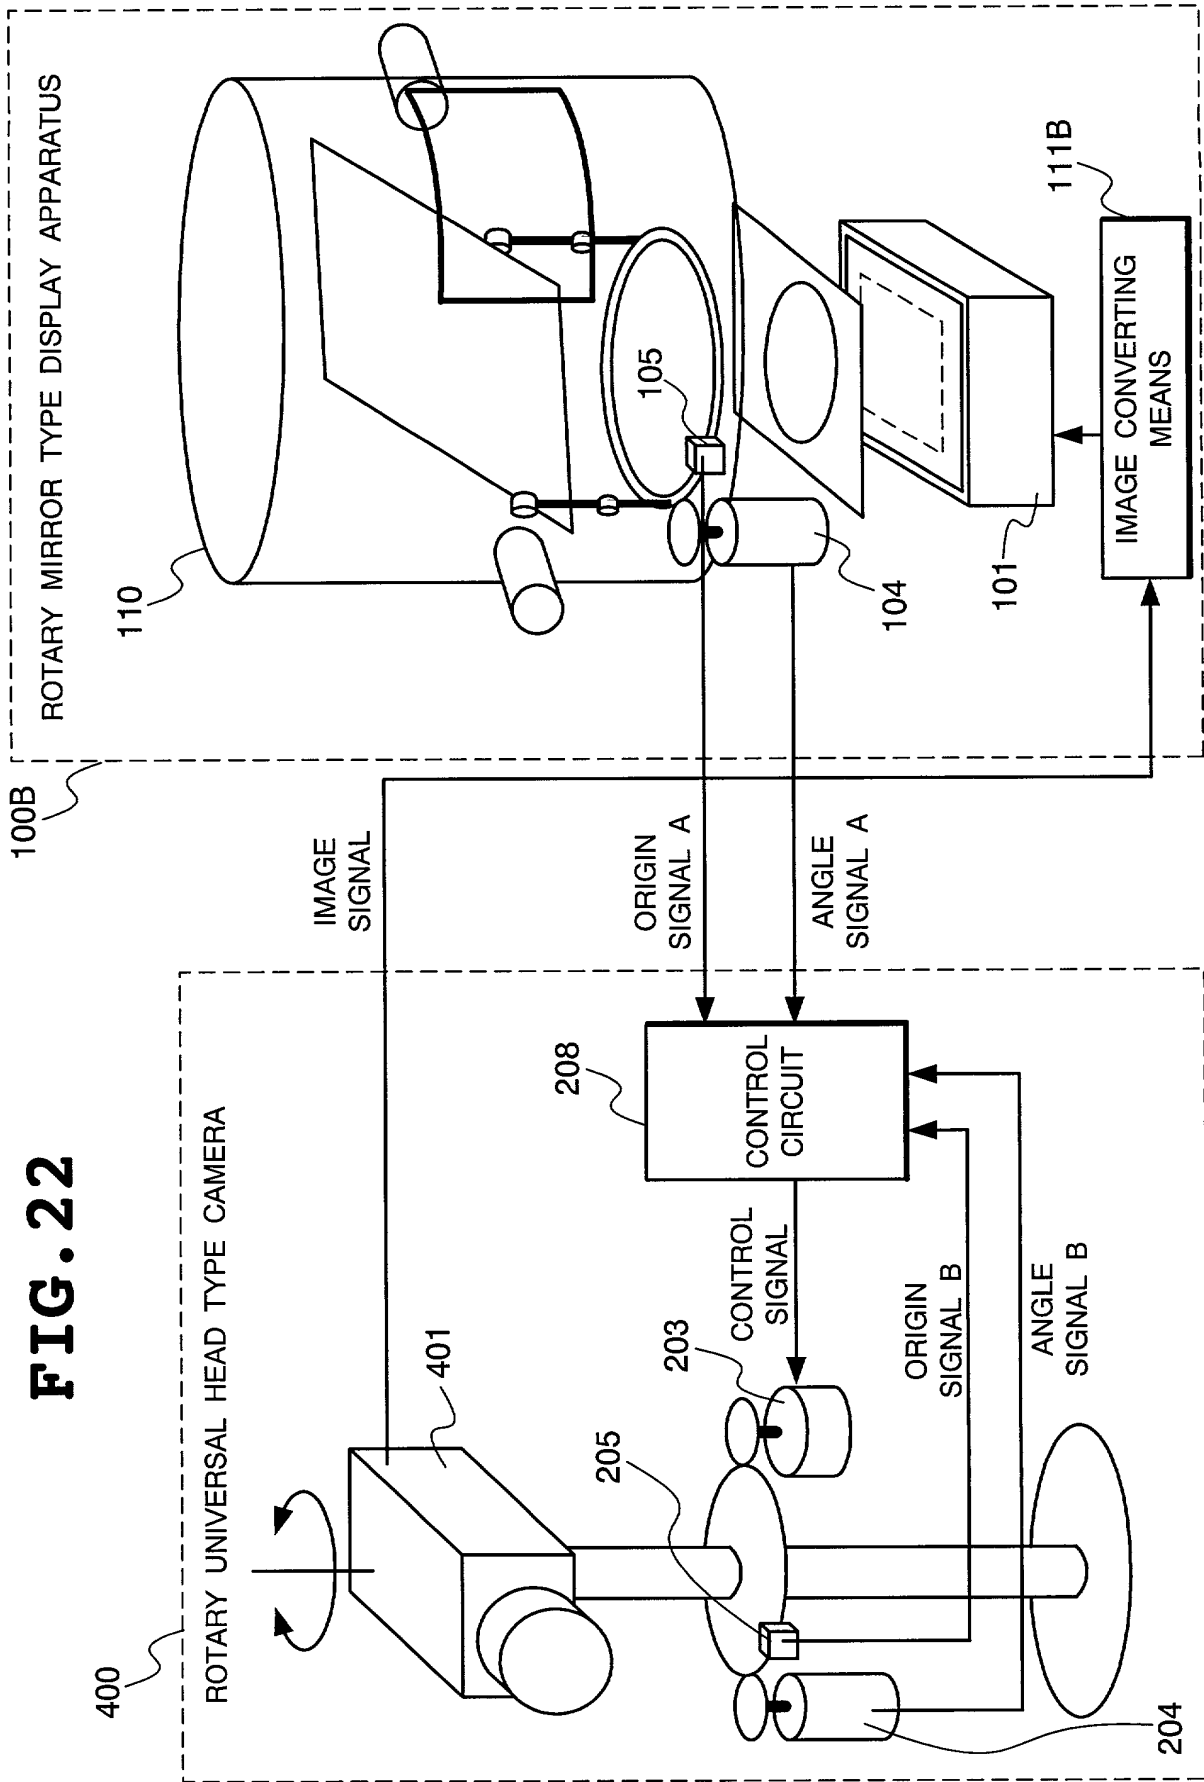
FIG. 22

FIG. 23

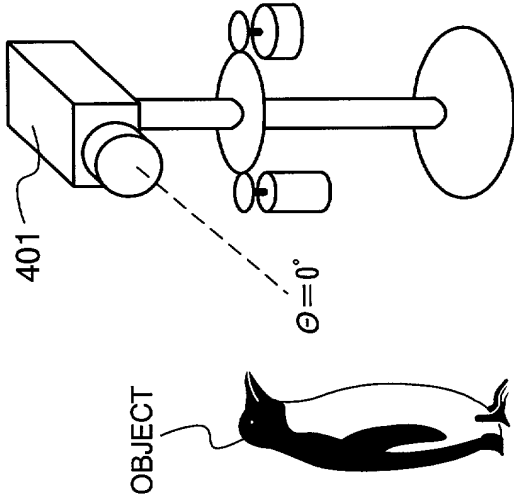
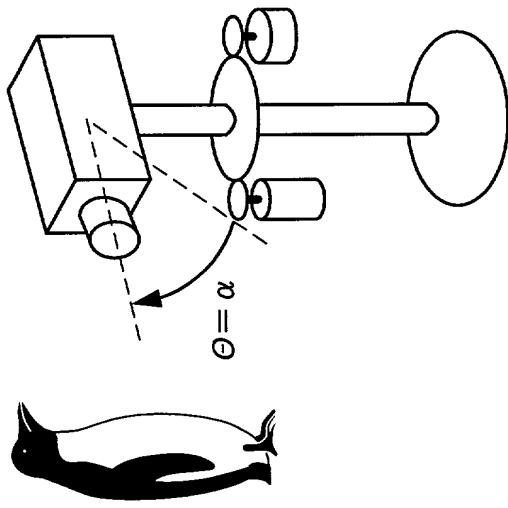
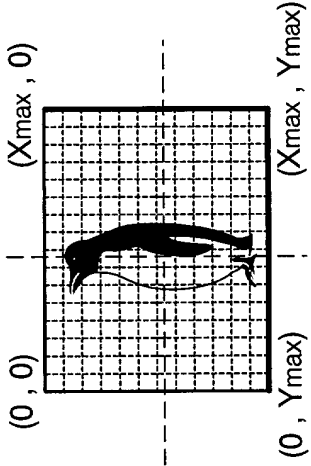
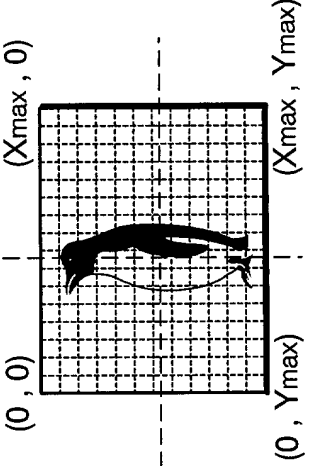
CONDITION OF ROTARY UNIVERSAL HEAD TYPE CAMERA 400	ANGULAR POSITION OF CAMERA 401 $\theta = 0^\circ$  <p>Diagram showing the camera 401 (labeled 401) in its original position, pointing directly at the object (labeled OBJECT). The angle θ is indicated as 0°.</p>	CAMERA 401 IS ROTATED OVER $\theta = \alpha$  <p>Diagram showing the camera 401 rotated by an angle $\theta = \alpha$ relative to its original position. The object is shown to the left.</p>
ORIGINAL IMAGE OUTPUT FROM CAMERA 401	 <p>Diagram showing the original image output from camera 401 at $\theta = 0^\circ$. The image is a silhouette of a penguin on a grid. The grid axes are labeled $(0, 0)$, $(X_{max}, 0)$, $(0, Y_{max})$, and (X_{max}, Y_{max}).</p>	 <p>Diagram showing the image output from camera 401 after rotation. The image is a silhouette of a penguin on a grid. The grid axes are labeled $(0, 0)$, $(X_{max}, 0)$, $(0, Y_{max})$, and (X_{max}, Y_{max}).</p>

FIG. 24

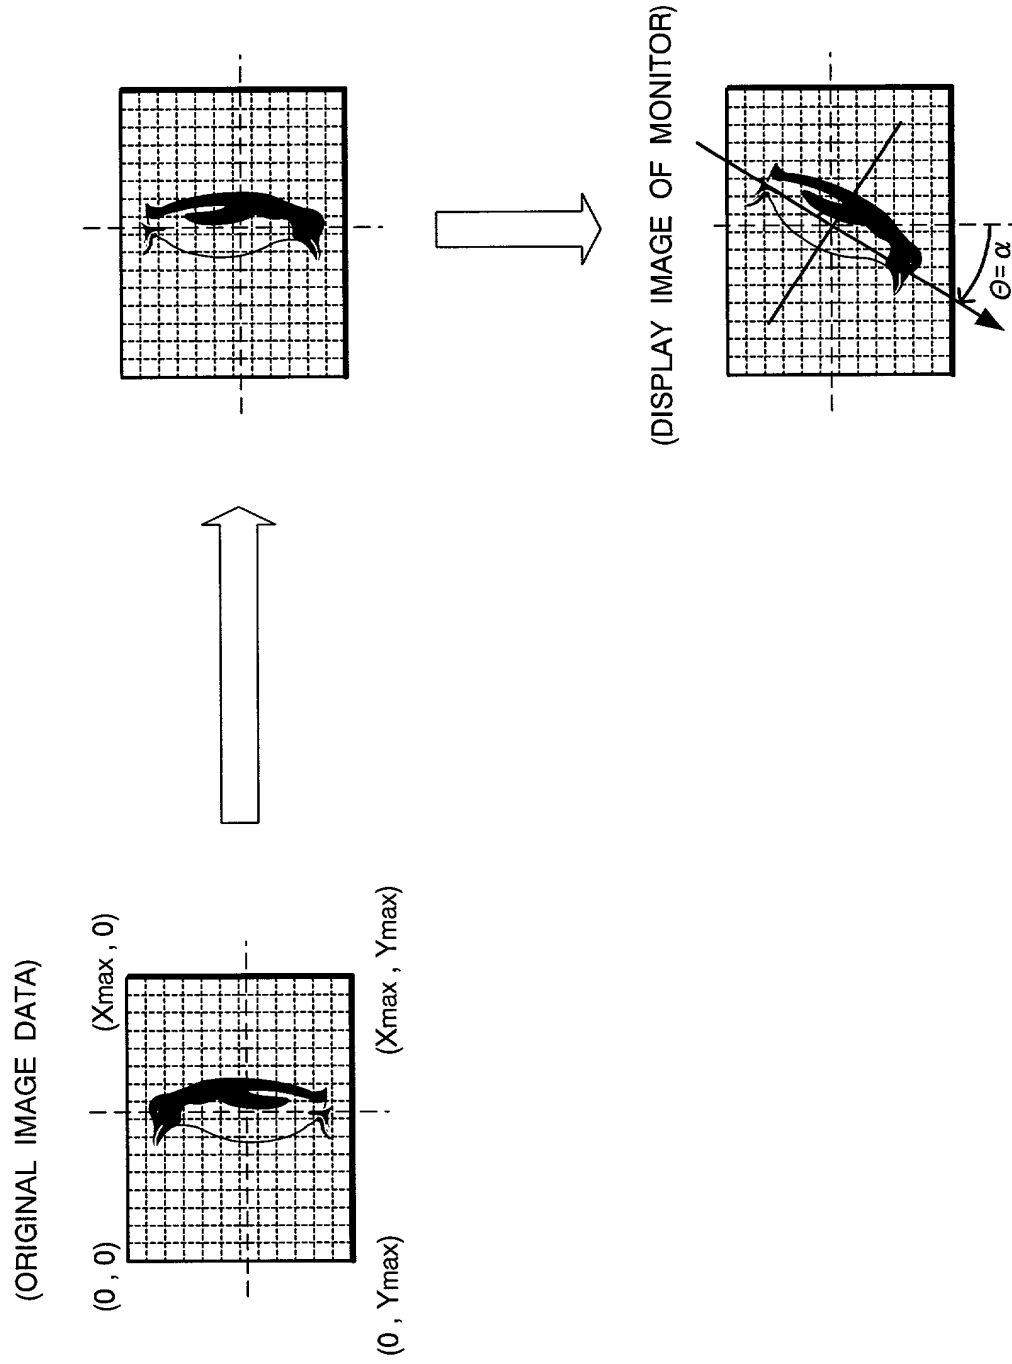


FIG. 25

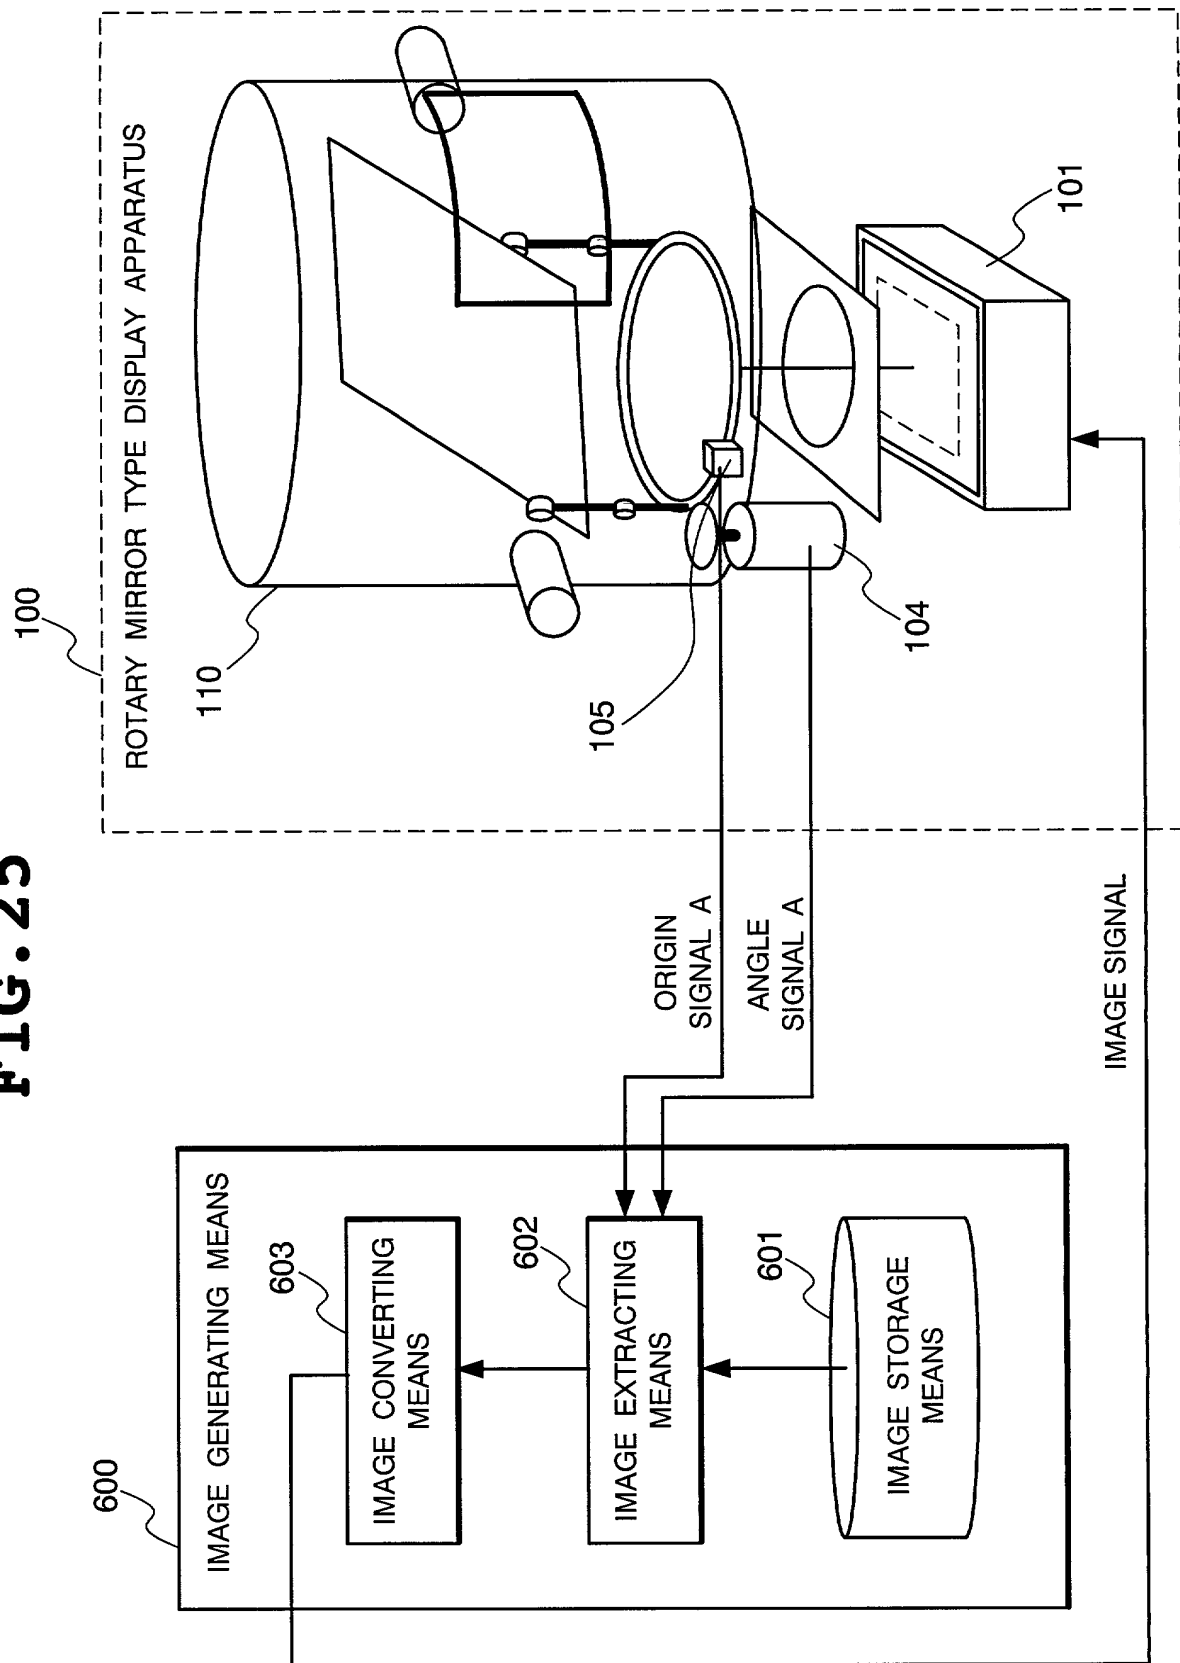


FIG. 26

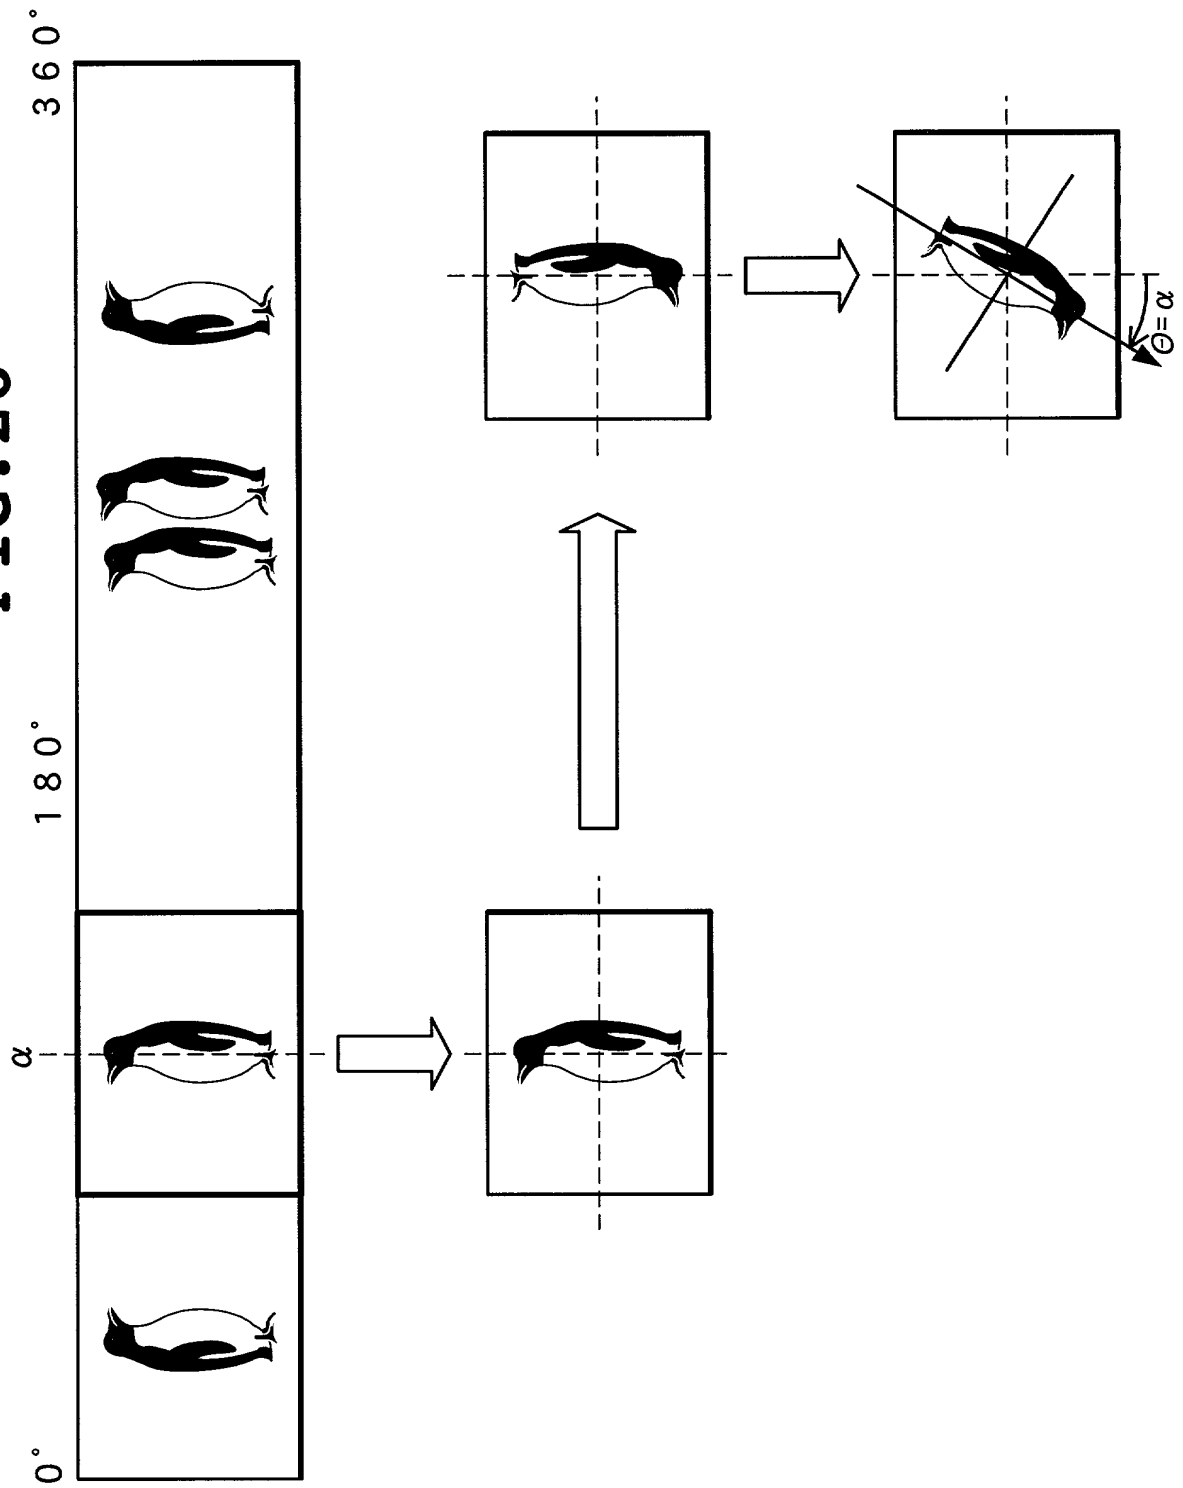


FIG. 27 (PRIOR ART)

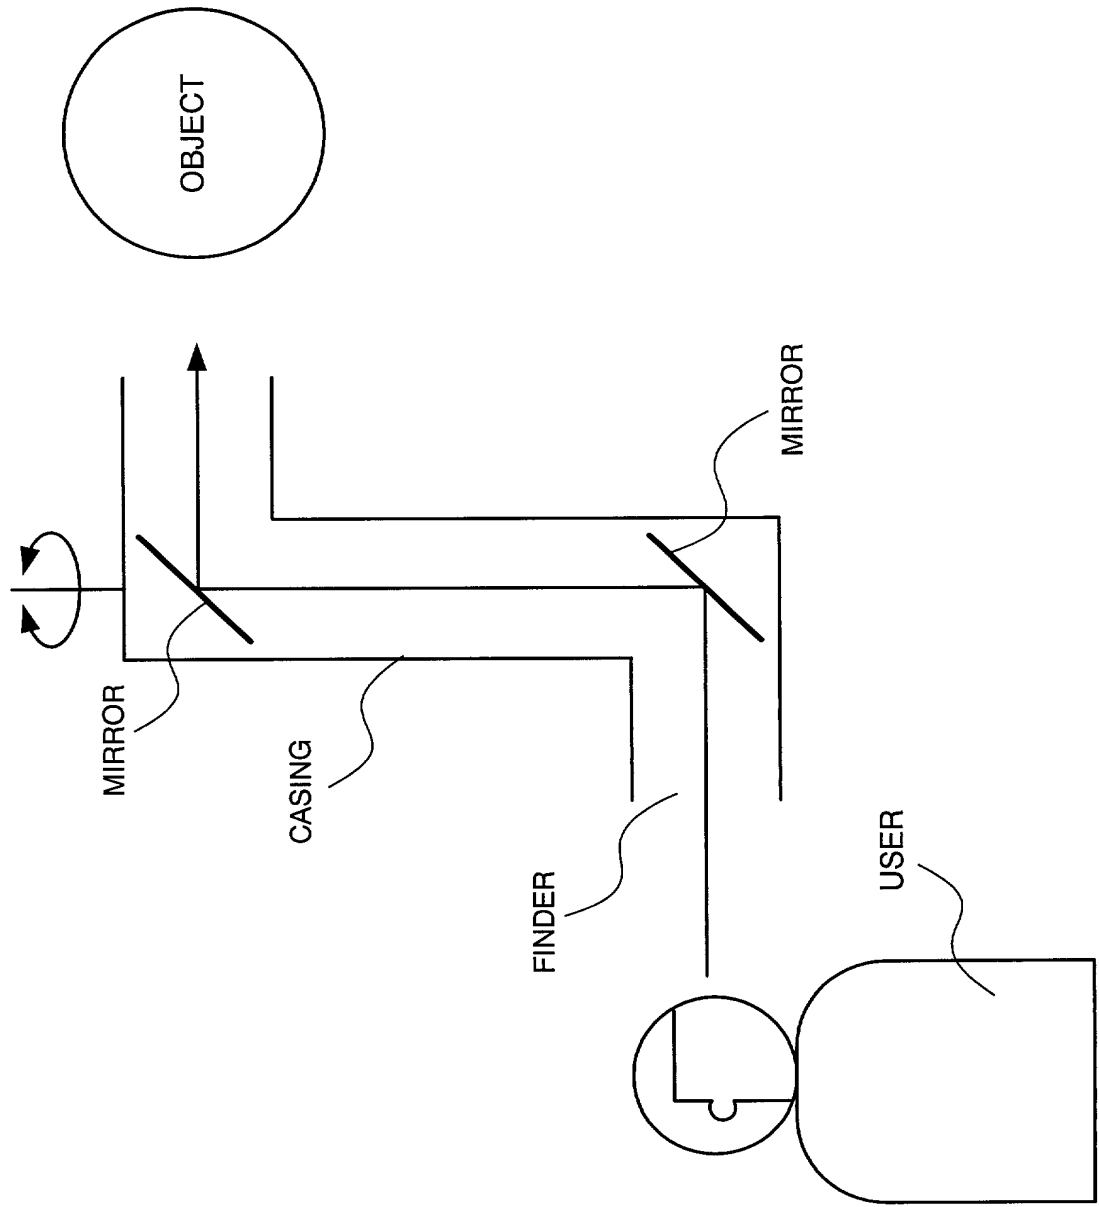


FIG. 28 (PRIOR ART)

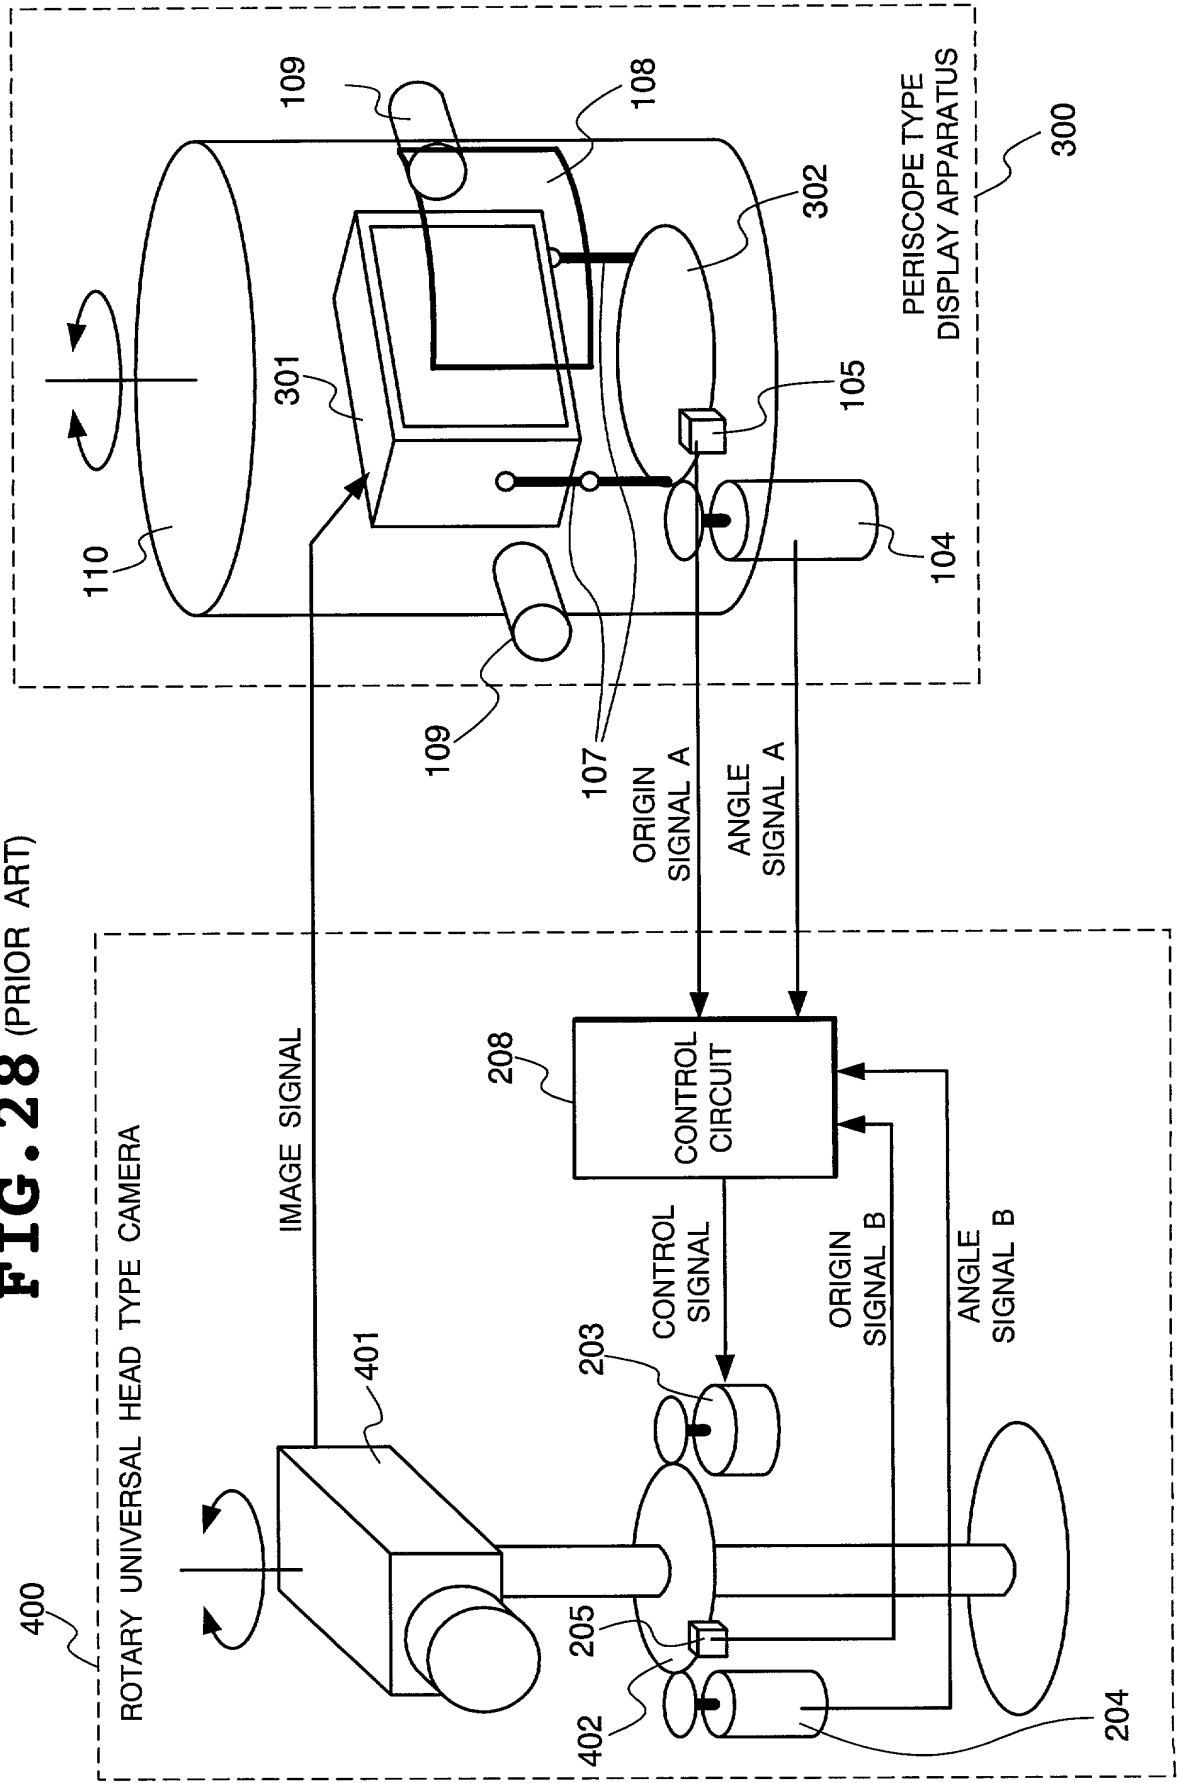


FIG. 29 (PRIOR ART)

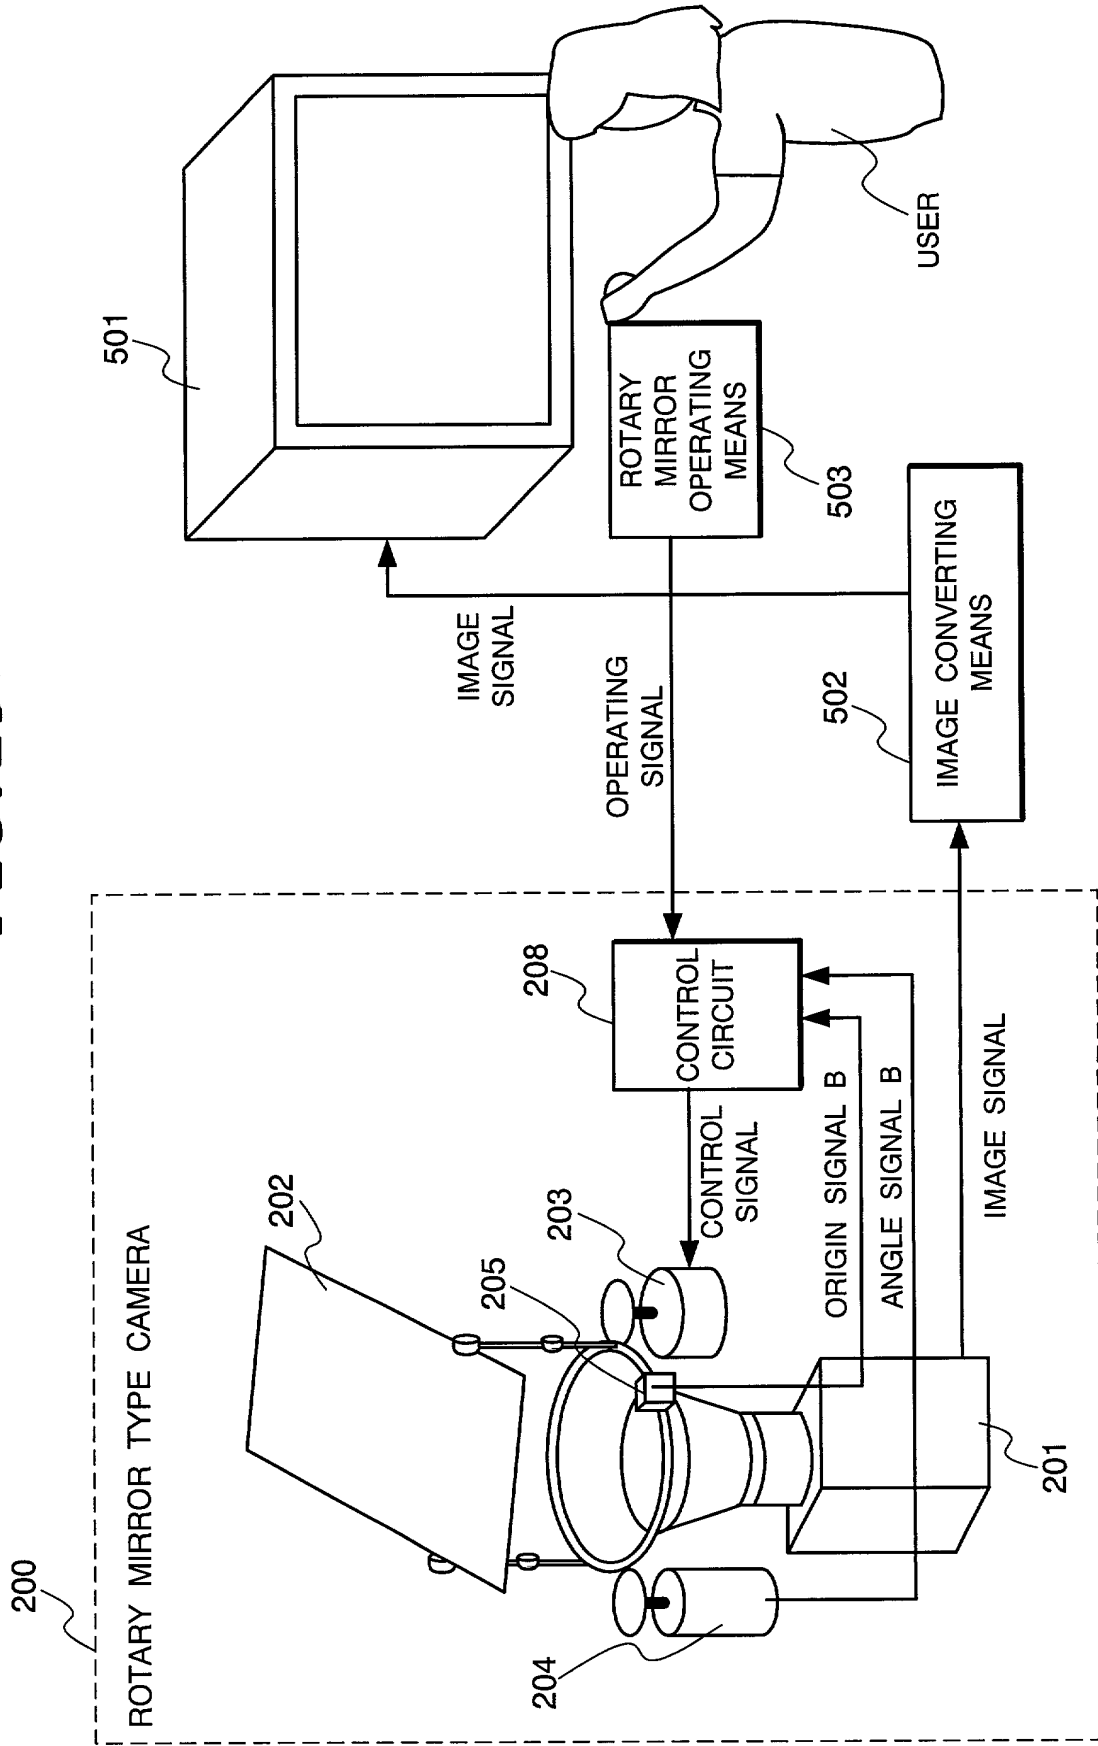


FIG. 30
(PRIOR ART)

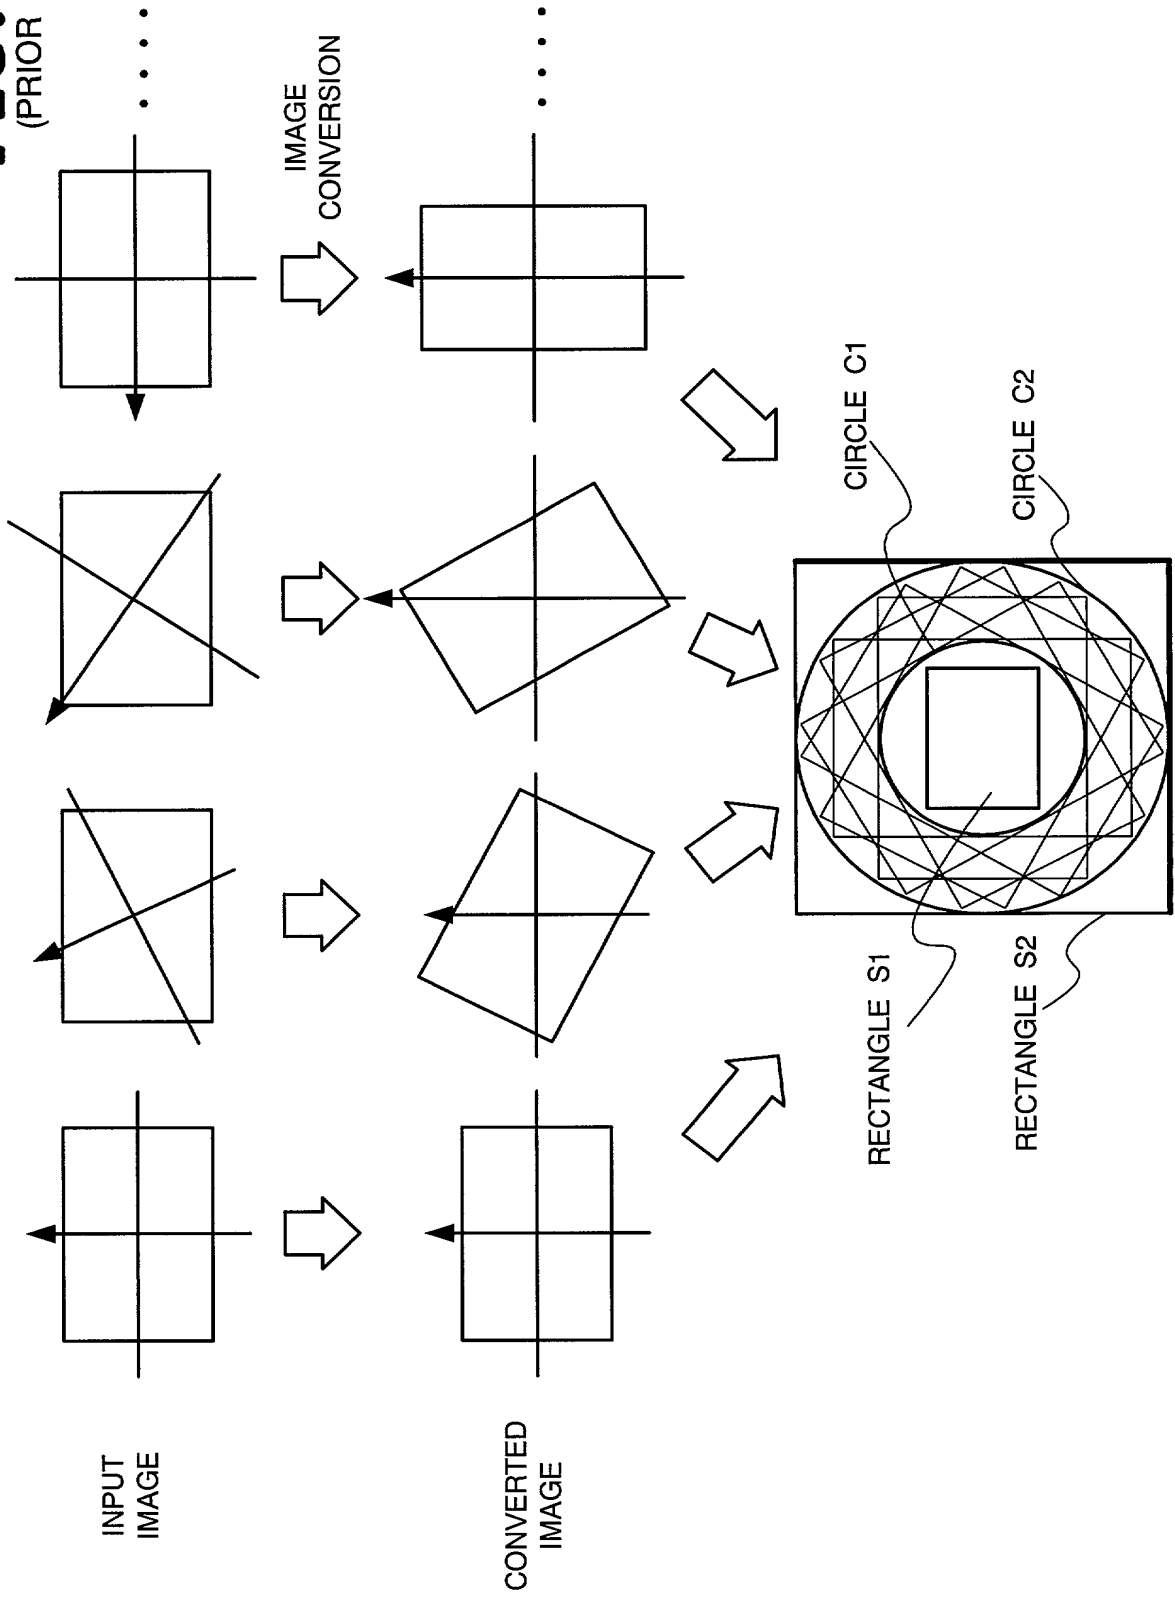


FIG. 31 (PRIOR ART)

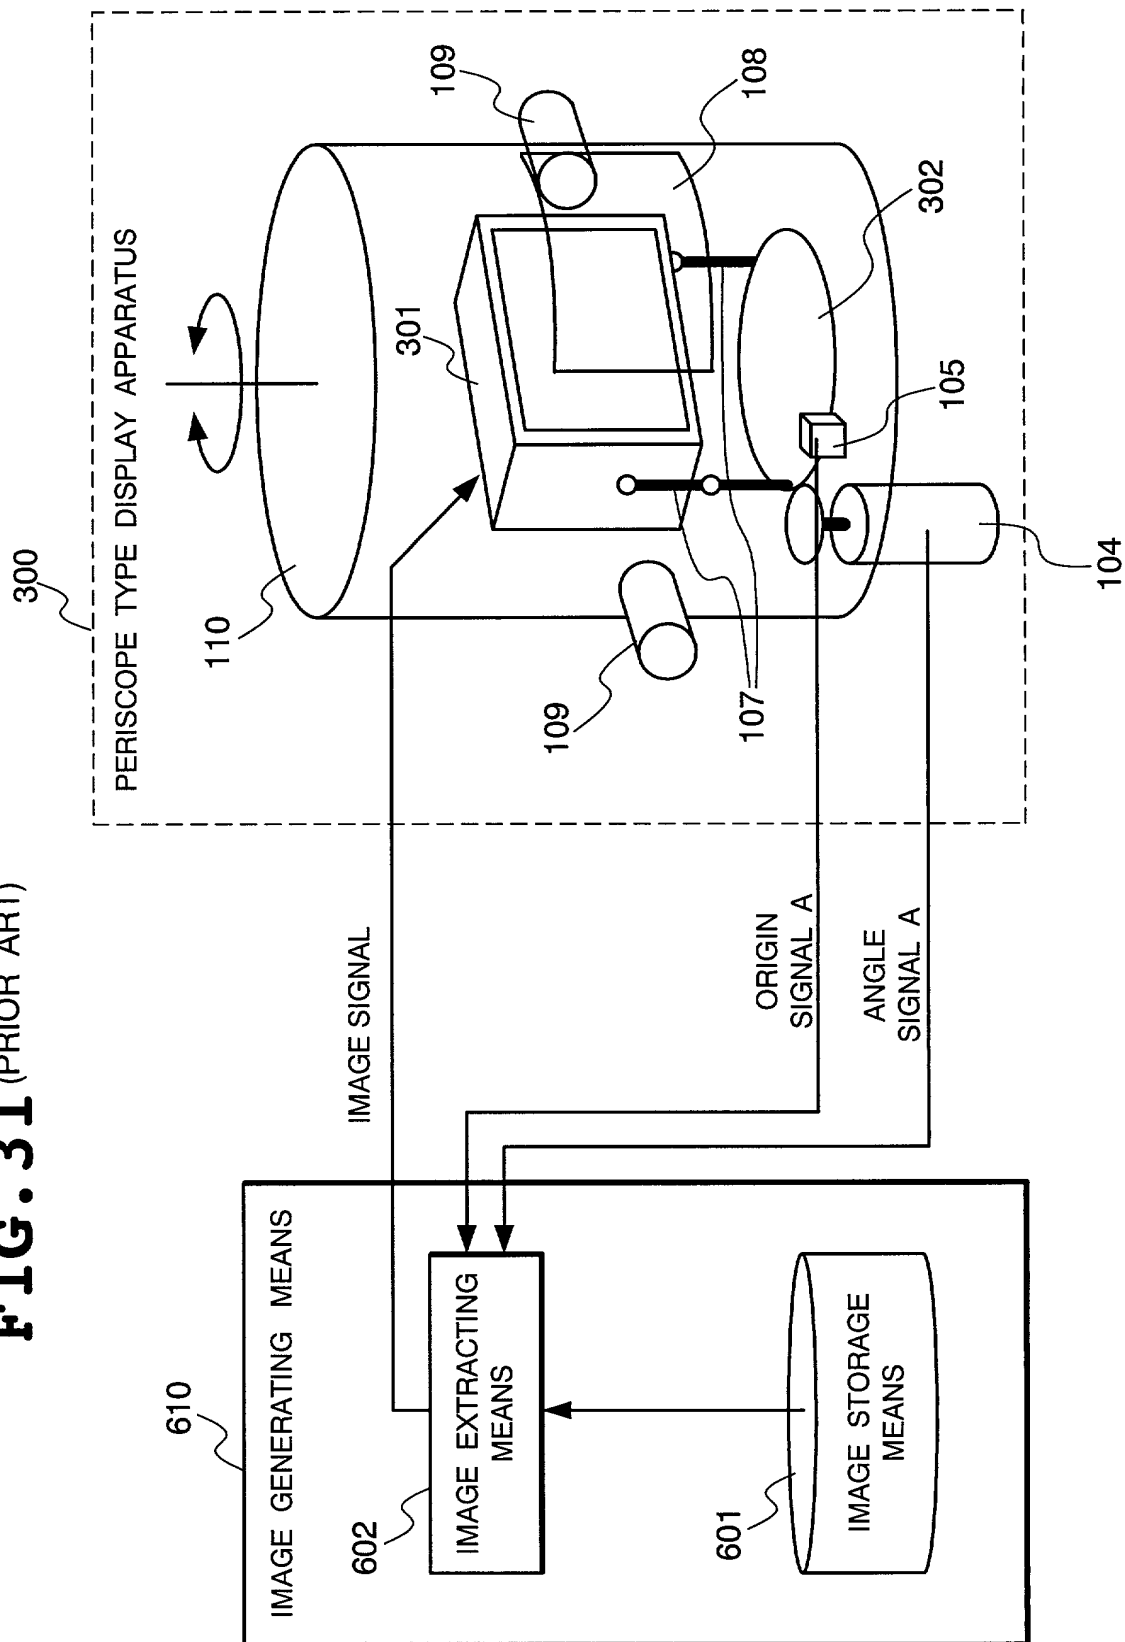


FIG. 32 (PRIOR ART)

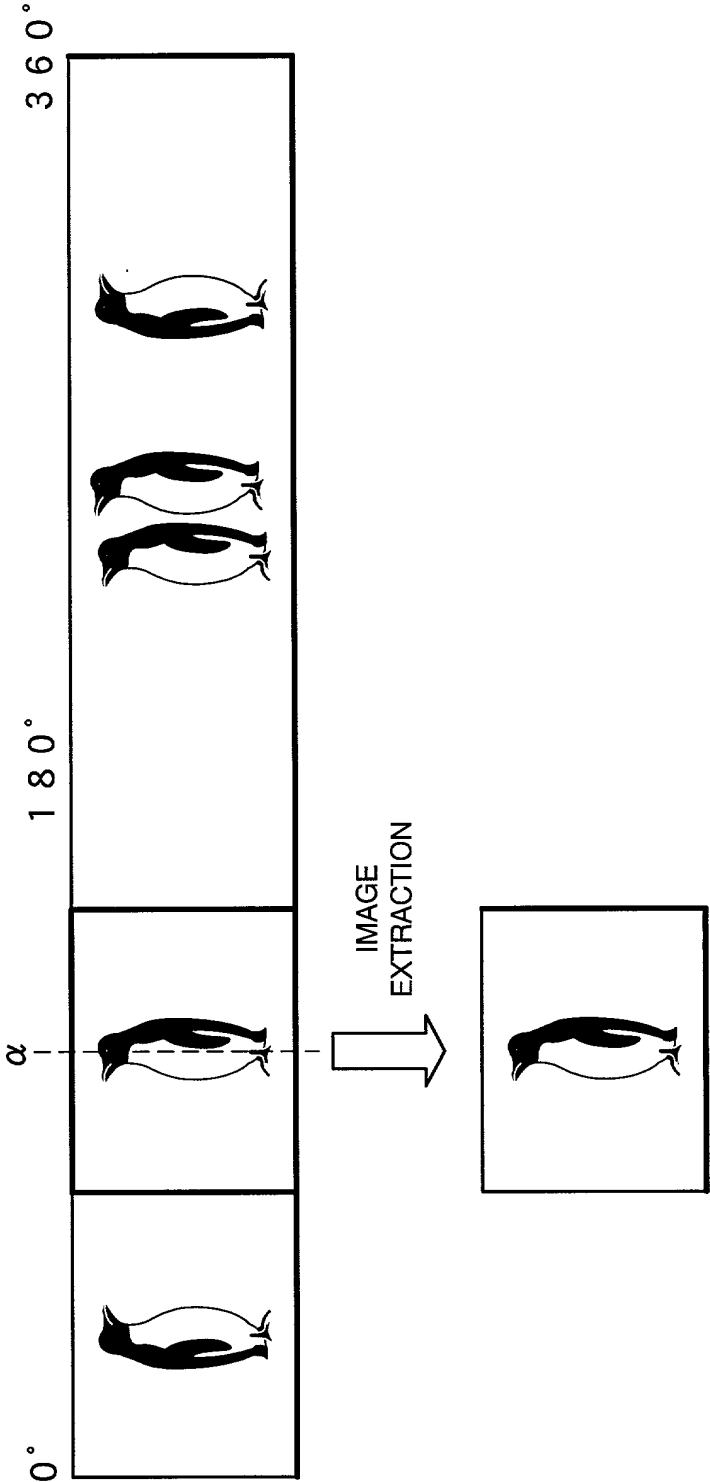
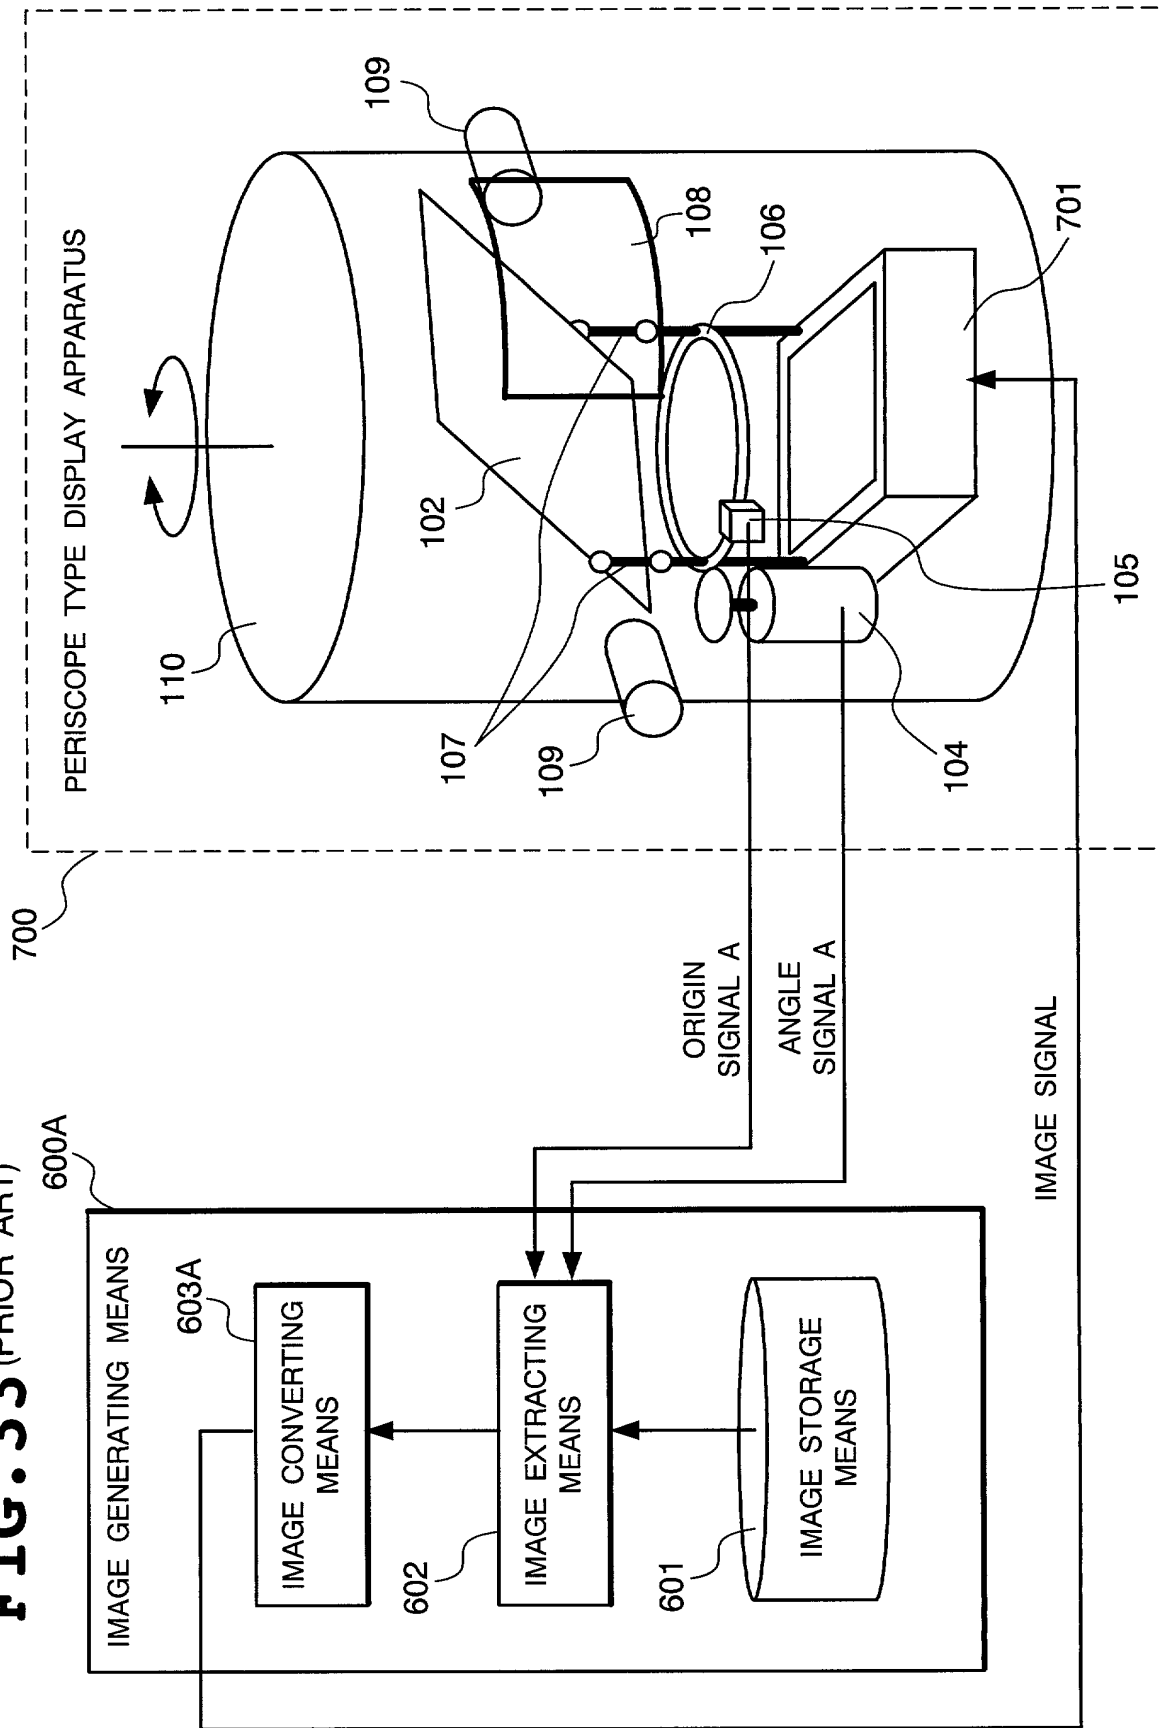


FIG. 33 (PRIOR ART)



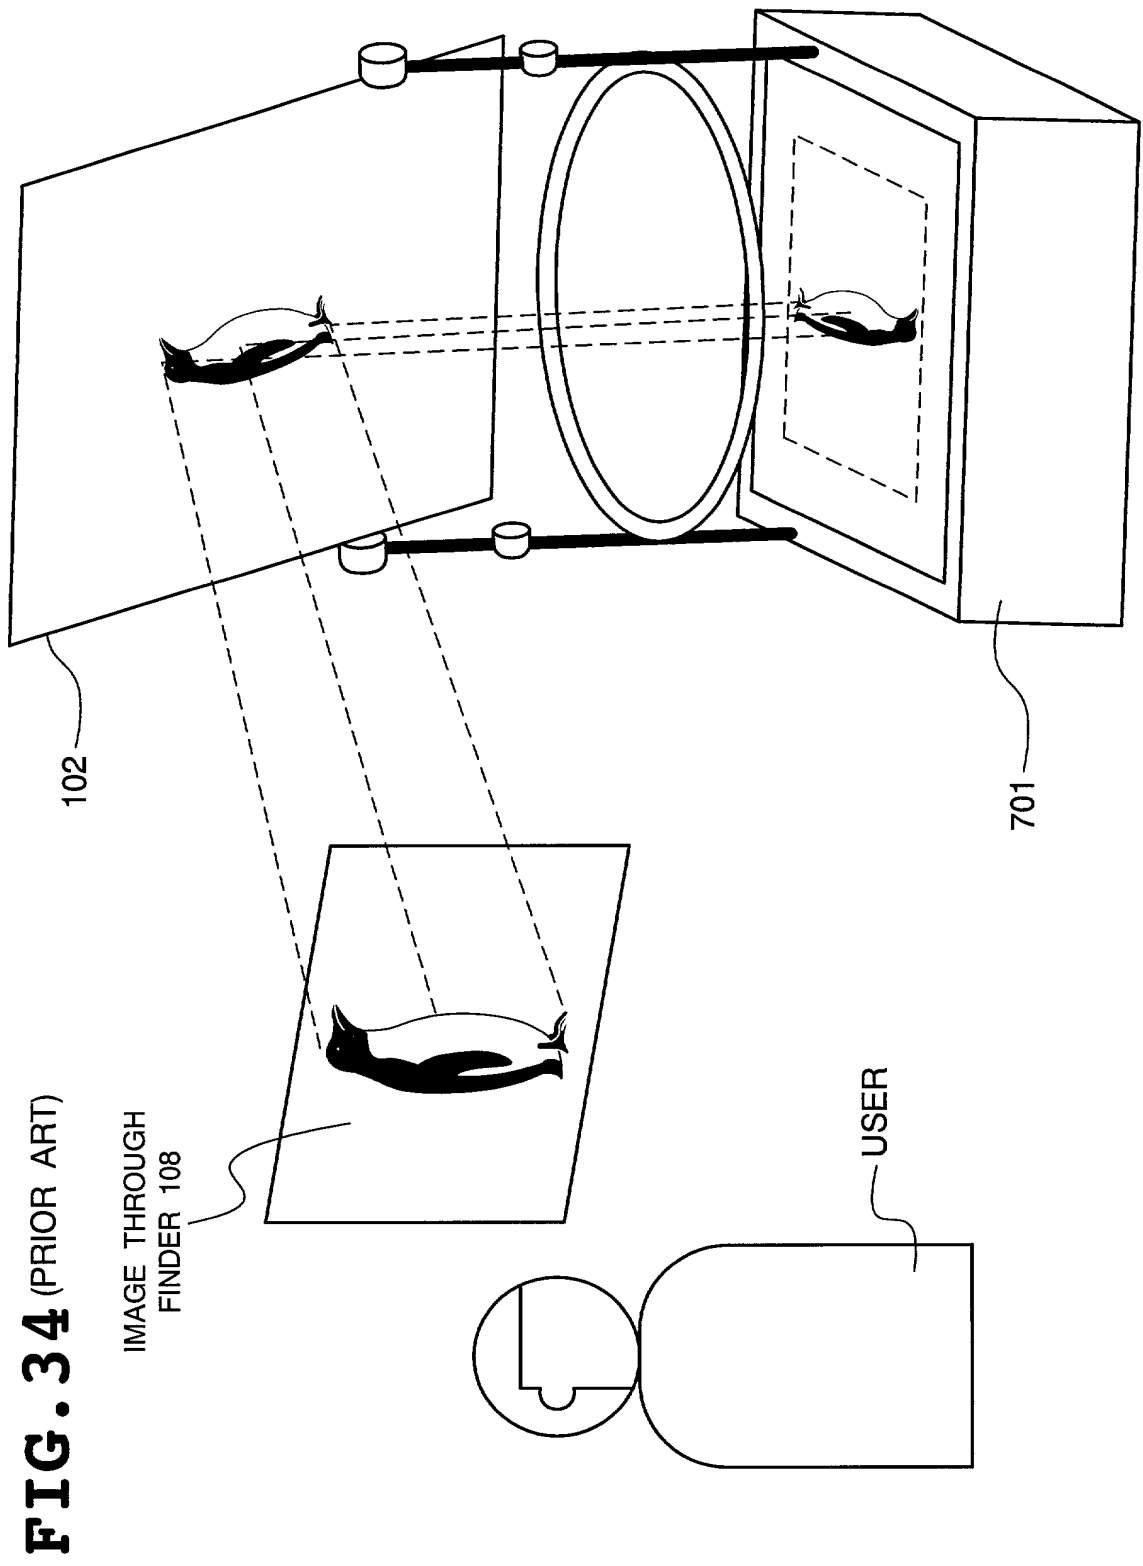
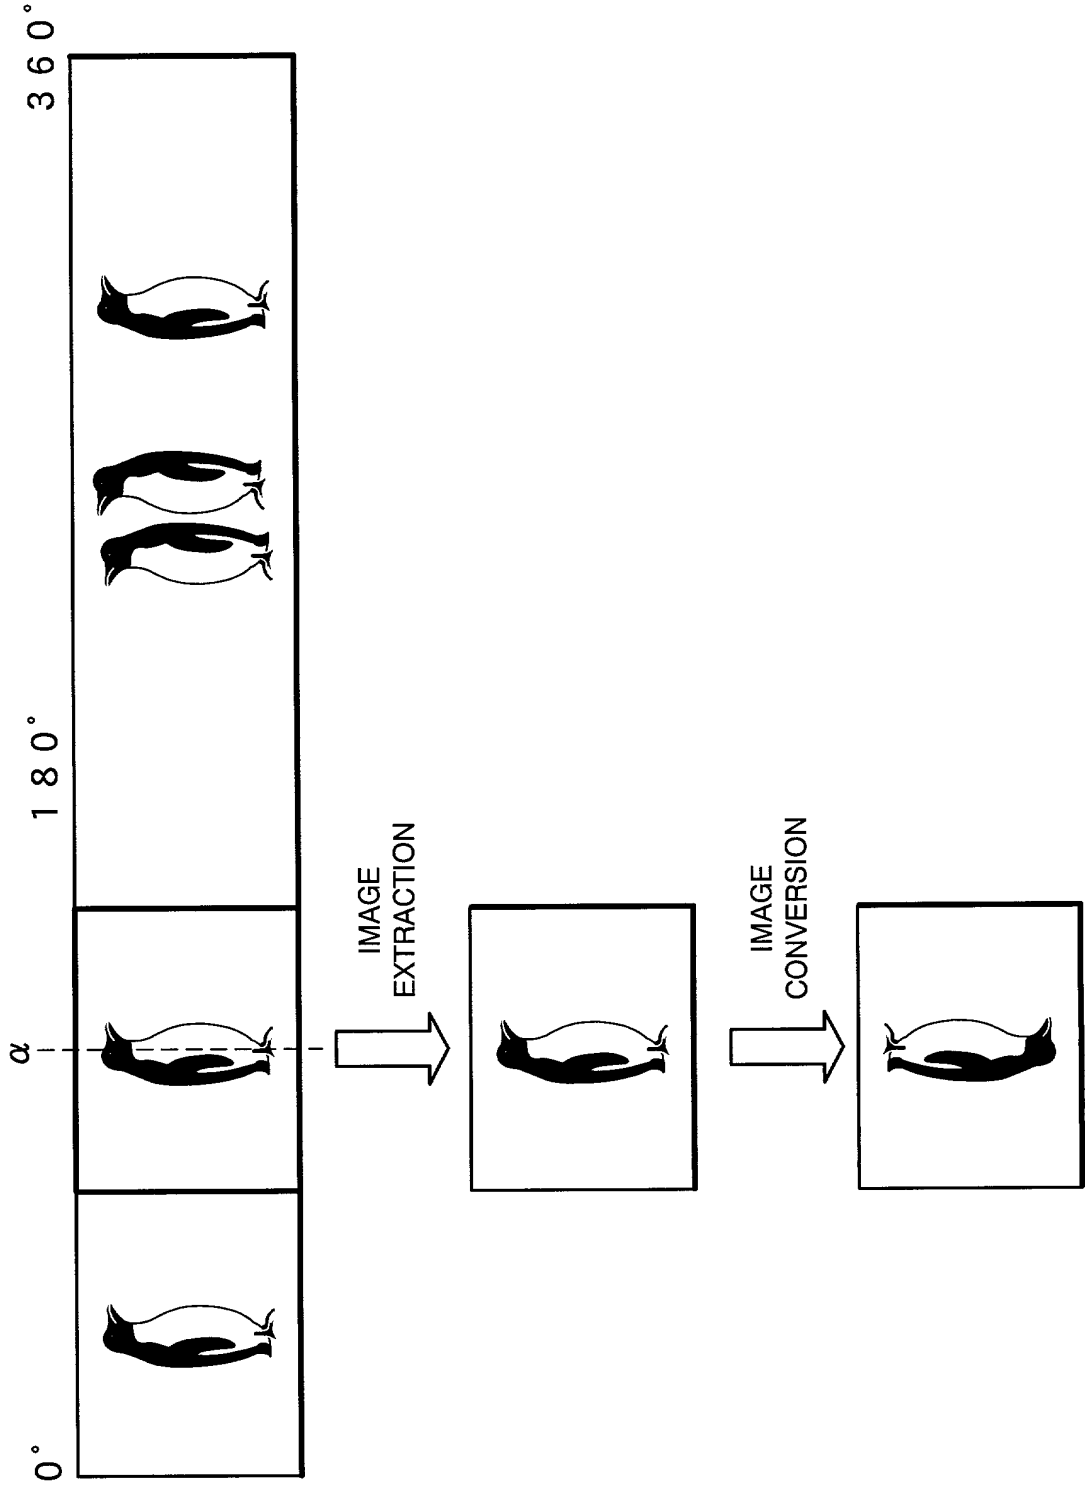


FIG. 35 (PRIOR ART)



DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

CAMERA SYSTEM AND DISPLAY APPARATUS

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known by me to be material to patentability as defined in Title 37, Code of Federal Regulations § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

NUMBER	COUNTRY	DAY/MONTH/YEAR FILED	PRIORITY CLAIMED
11-312354	Japan	2/November/1999	Yes

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

APPLICATION NO.	FILING DATE

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is known by me to be material to patentability as defined in Title 37, Code of Federal Regulations § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

APPLICATION SERIAL NO.	FILING DATE	STATUS: PATENTED, PENDING, ABANDONED

I hereby appoint as my attorneys, with full powers of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Stephen A. Bent, Reg. No. 29,768; David A. Blumenthal, Reg. No. 26,257; John J. Feldhaus, Reg. No. 28,822; Donald D. Jeffery, Reg. No. 19,980; Eugene M. Lee, Reg. No. 32,039; Peter G. Mack, Reg. No. 26,001; Brian J. McNamara, Reg. No. 32,789; Sybil Meloy, Reg. No. 22,749; George E. Quillin, Reg. No. 32,792; Colin G. Sandercock, Reg. No. 31,298; Bernhard D. Saxe, Reg. No. 28,665; Charles F. Schill, Reg. No. 27,590; Richard L. Schwaab, Reg. No. 25,479; Arthur Schwartz, Reg. No. 22,115; Harold C. Wegner, Reg. No. 25,258.

Address all correspondence to FOLEY & LARDNER, Washington Harbour, 3000 K Street, N.W., Suite 500, P.O. Box 25696, Washington, D.C. 20007-8696. Address telephone communications to David A. Blumenthal at (202) 672-5300.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole Inventor	Signature of First or Sole Inventor	Date
Atsushi KASHITANI	<i>Atsushi Kashitani</i> (印)	Oct.27,2000
Residence Address	Country of Citizenship	
Tokyo, Japan	Japan	
Post Office Address		
c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan		

Full Name of Second Inventor	Signature of Second Inventor	Date
Toshiyasu NAKAO	<i>Toshiyasu Nakao</i> (印)	Oct.27,2000
Residence Address	Country of Citizenship	
Tokyo, Japan	Japan	
Post Office Address		
c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan		

Full Name of Third Inventor	Signature of Third Inventor	Date
Residence Address	Country of Citizenship	
Post Office Address		

Full Name of Fourth Inventor	Signature of Fourth Inventor	Date
Residence Address	Country of Citizenship	
Post Office Address		

Full Name of Fifth Inventor	Signature of Fifth Inventor	Date
Residence Address	Country of Citizenship	
Post Office Address		